

## STOREFRONT LEGEND

### GLASS SCHEDULE

GLASS TYPES INDICATED ON THE SCHEDULE ARE AS FOLLOWS (SEE SPECIFICATION SECTIONS 08.6000 "GLAZING" & 1.3.4900 "RADIATION PROTECTION"):

#### MONOLITHIC:


- G1 6.0mm CLEAR, TEMPERED  
G2 7.5mm CLEAR, LAMINATED, INTERLAYER COLOR: CLEAR  
G3 7.5mm CLEAR, LAMINATED, INTERLAYER COLOR: ARCTIC SNOW  
G4 6.0mm CLEAR, FIRE-RATED CERAMIC GLAZING, MATCH RATING OF OPNG.  
G5 4.0mm(x2) ULTRACLEAR, TEMPERED, 2 LITES + INTEGRAL BLINDS  
G6 12.5mm SAFETY, LEAD BORATE GLASS, SEE SPECIFICATIONS  
G7 12.5mm SAFETY, LASER RATED, SEE SPECIFICATIONS

#### INSULATING:


- IG1 1 INCH INSULATING, VISION LITE  
IG2 1 INCH INSULATING, SPANDREL LITE  
IG3 1 INCH INSULATING, TEMPERED, VISION LITE

#### SPECIALTY GLASS:

- RG1 RF-SHIELDED GLASS AT MRI ROOM TO BE PROVIDED UNDER RF-SHIELDED ENCLOSURE PACKAGE

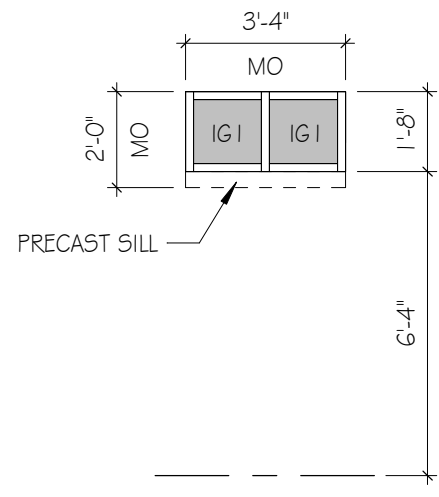


**S-1**  
SCALE: 1/4" = 1'-0"

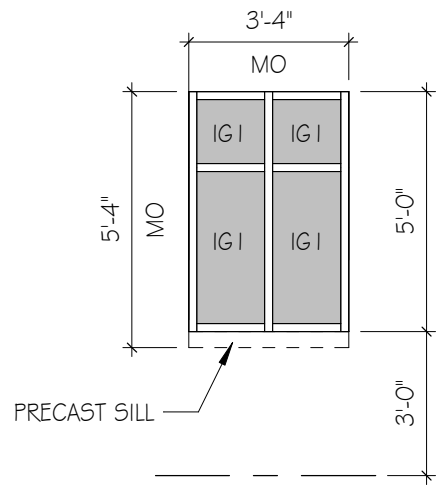

**S-2**  
SCALE: 1/4" = 1'-0"

## ROOM SIGNAGE TYPES


**TYPE A**  
NON-GLARE ACRYLIC WITH APPLIED RAISED CHARACTERS  
COMPLYING WITH 2010 ADA STANDARDS FOR  
ACCESSIBLE DESIGN - 703

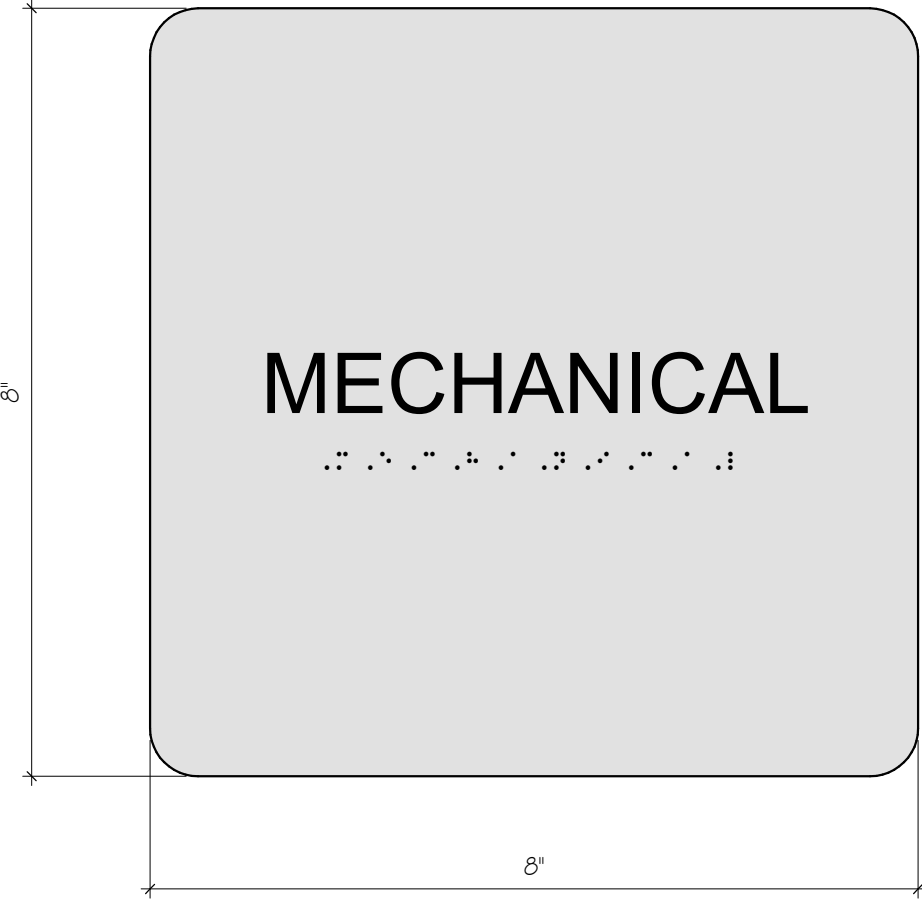


**TYPE B**  
NON-GLARE ACRYLIC WITH APPLIED RAISED CHARACTERS  
AND PICTOGRAMS COMPLYING WITH 2010 ADA  
STANDARDS FOR ACCESSIBLE DESIGN - 703




## STOREFRONT DETAILS

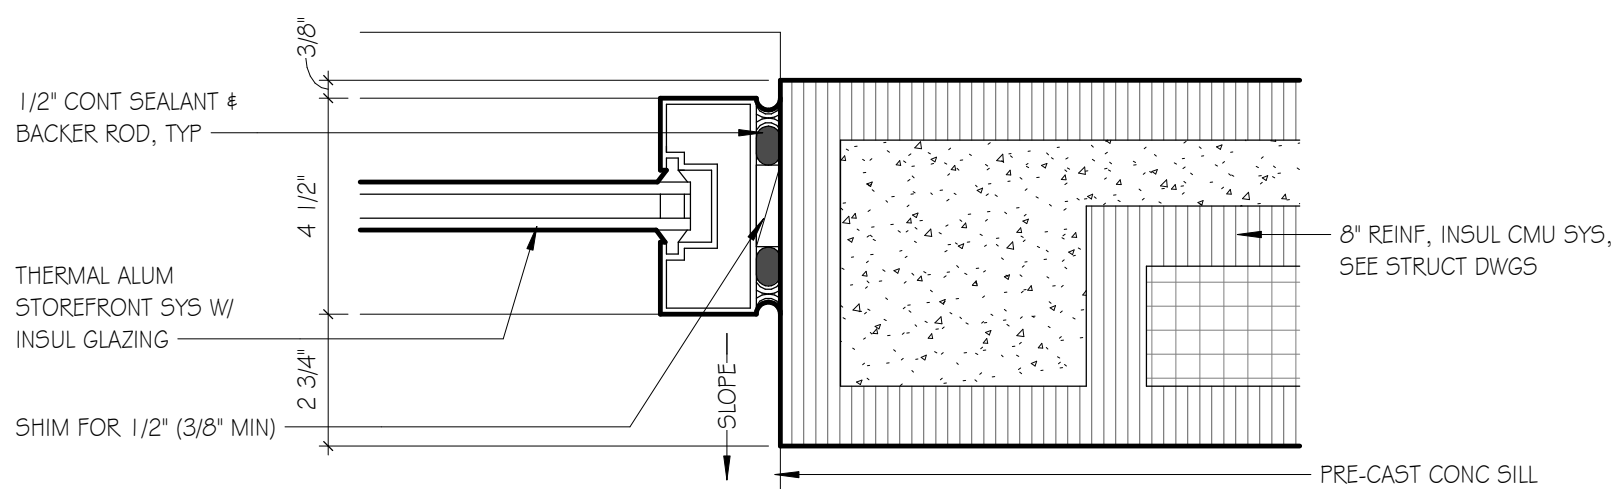

**F3 Detail 2**  
SCALE: 3" = 1'-0"

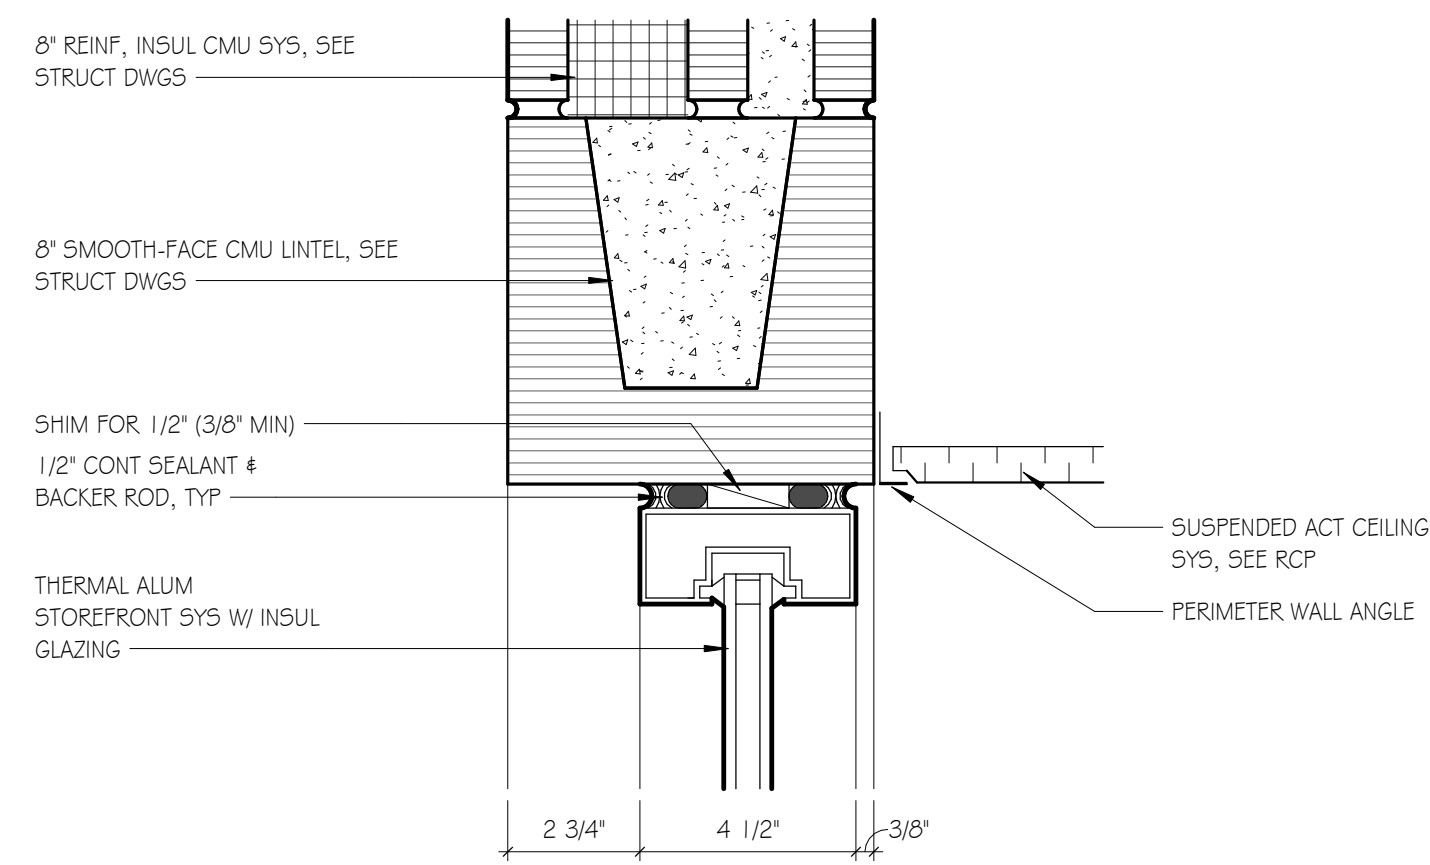

**C3 STOREFRONT HEAD DETAIL**  
SCALE: 3" = 1'-0"

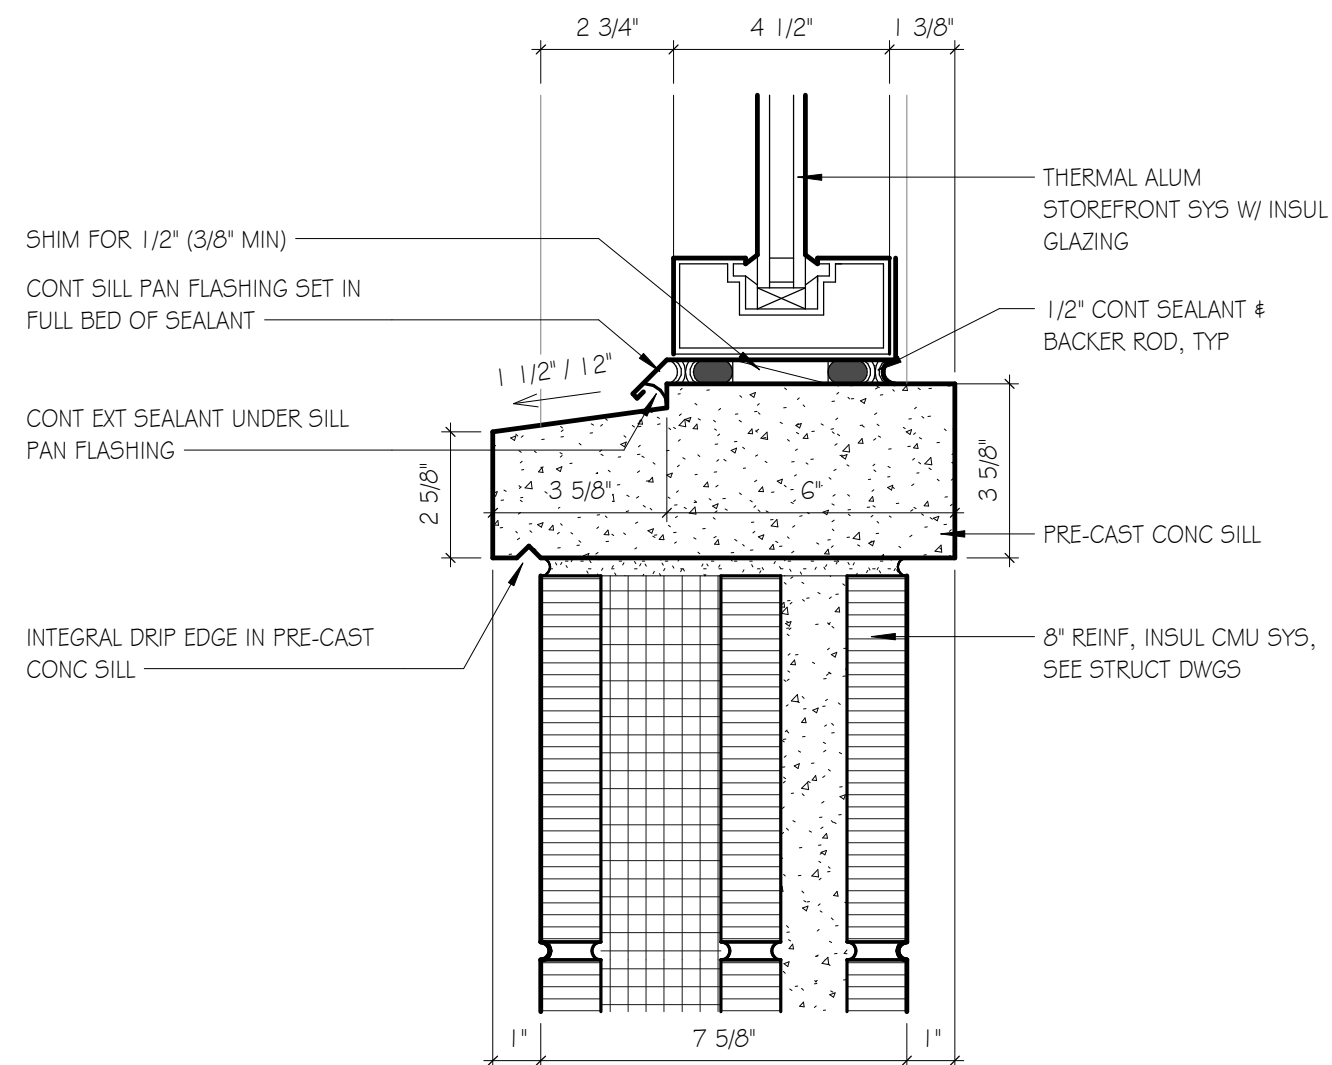

**A3 STOREFRONT SILL DETAIL**  
SCALE: 3" = 1'-0"


## DOOR SCHEDULE

DOOR NUMBER	LOCATION	SIZE			DOOR			FRAME		HARDWARE				SIGNAGE	
	ROOM NAME	WIDTH	HT	THK	DOOR TYPE	MAT'L	GLASS OR LOUVER TYPE	FRAME TYPE	MAT'L	HARDWARE SET NO.	ELEC. COORD.	FIRE RATING	NUMBERED NOTES	TYPE	SIGN PRINT
											FIRE ALARM INTERFACE				
100	VEST	3'-0"	7'-8"	13/4"	FG	HM	IG3	F13	HM	11	X	-	15, 20	-	
101	OFFICE	3'-0"	7'-0"	13/4"	FG	HM	G1	F13	HM	13	X	-		-	
102	CAT ROOM	3'-0"	7'-0"	13/4"	N	HM	G1	F13	HM	01	-	-	16	A	CAT ROOM
103	CATIO	3'-0"	7'-0"	13/4"	N	HM	IG3	F13	HM	03	-	-	15	A	CATIO
104A	CAT AREA STORAGE	3'-0"	7'-0"	13/4"	F	HM	-	F13	HM	07	-	-		A	CAT STORAGE
104B	CAT AREA STORAGE	3'-0"	7'-0"	13/4"	F	HM	-	F13	HM	07	-	-		A	CAT STORAGE
105	RR	3'-0"	7'-0"	13/4"	F	HM	-	F13	HM	06	-	-		B	RESTROOM
106	SHOWER	3'-0"	7'-0"	13/4"	F	HM	-	F13	HM	06	-	-		B	SHOWER
107	RR	3'-0"	7'-0"	13/4"	F	HM	-	F13	HM	06	-	-		B	RESTROOM
108	PUPPY KENNELS	3'-0"	7'-0"	13/4"	N	HM	G1	F13	HM	05	-	-		-	
109	DOG KENNELS	3'-0"	7'-0"	13/4"	N	HM	IG3	F13	HM	12	X	-	15, 20	-	
111	PUPPY KENNELS	3'-0"	7'-0"	13/4"	N	HM	G1	F13	HM	02	-	-	16	A	DOG KENNELS
112A	DOG AREA STORAGE	3'-0"	7'-0"	13/4"	F	HM	-	F13	HM	07	-	-		A	DOG STORAGE
112B	DOG AREA STORAGE	3'-0"	7'-0"	13/4"	F	HM	-	F13	HM	07	-	-		A	DOG STORAGE
113	EXAM	3'-0"	7'-0"	13/4"	F	HM	-	F13	HM	01	-	-		A	EXAM ROOM
114B	HALL	3'-0"	7'-0"	13/4"	F	HM	-	F13	HM	01	-	-		-	
115A	HALL	3'-0"	7'-0"	13/4"	N	HM	G1	F13	HM	01	-	-		-	
115B	DOG KENNELS	3'-0"	7'-0"	13/4"	N	HM	G1	F13	HM	04	-	-		-	
116A	EXAM/EUTHAN	3'-0"	7'-0"	13/4"	F	HM	-	F13	HM	01	-	-		A	EXAM ROOM / EUTHANASIA
116B	GARAGE	3'-0"	7'-0"	13/4"	F	HM	-	F13	HM	01	-	-		A	EXAM ROOM / EUTHANASIA
117A	DOG QUARANTINE	3'-0"	7'-0"	13/4"	F	HM	-	F13	HM	01	-	-		A	DOG QUARANTINE
117B	GARAGE	3'-0"	7'-0"	13/4"	N	HM	G1	F13	HM	01	-	-		A	DOG QUARANTINE
118	GARAGE	6'-0"	7'-0"	13/4"	F	HM	-	F13	HM	10	-	-		A	UTILITY
119A	EXTERIOR	3'-0"	7'-0"	13/4"	F	HM	-	F13	HM	12	X	90 MIN	15, 20	-	
119B	EXTERIOR	8'-0"	8'-0"	2"	SC	STL	-	STL	14	-	-	-	09, 15	-	
119C	GARAGE	3'-0"	7'-0"	13/4"	N	HM	G1	F13	HM	08	-	-		A	DOG KENNELS
120	DOG KENNELS	3'-0"	7'-0"	13/4"	N	HM	IG3	F13	HM	12	X	-	15, 20	-	
121	MECH	3'-0"	7'-0"	13/4"	F	HM	-	F13	HM	09	-	-		A	MECHANICAL / DATA
122	STOR	3'-0"	7'-0"	13/4"	F	HM	-	F13	HM	15	-	-		-	


### GATE SCHEDULE - KENNELS

DOOR NUMBER	SIZE				DOOR		FRAME		NUMBERED NOTES
	ASSEMBLY WIDTH	GATE WIDTH	HT	THK	DOOR TYPE	MAT'L	GLASS OR LOUVER TYPE	FRAME TYPE	
A	3'-0"	2'-10"	5'-11"		WM1	WM	-	-	ST/S
B	4'-0"	2'-10"	varies		WM2	WM	-	-	ST/S
C	-	1'-5"	2'-4"	1"	GU	AL	-	-	15, 24

## DOOR TYPES - WOOD + HOLLOW METAL SWING DOORS

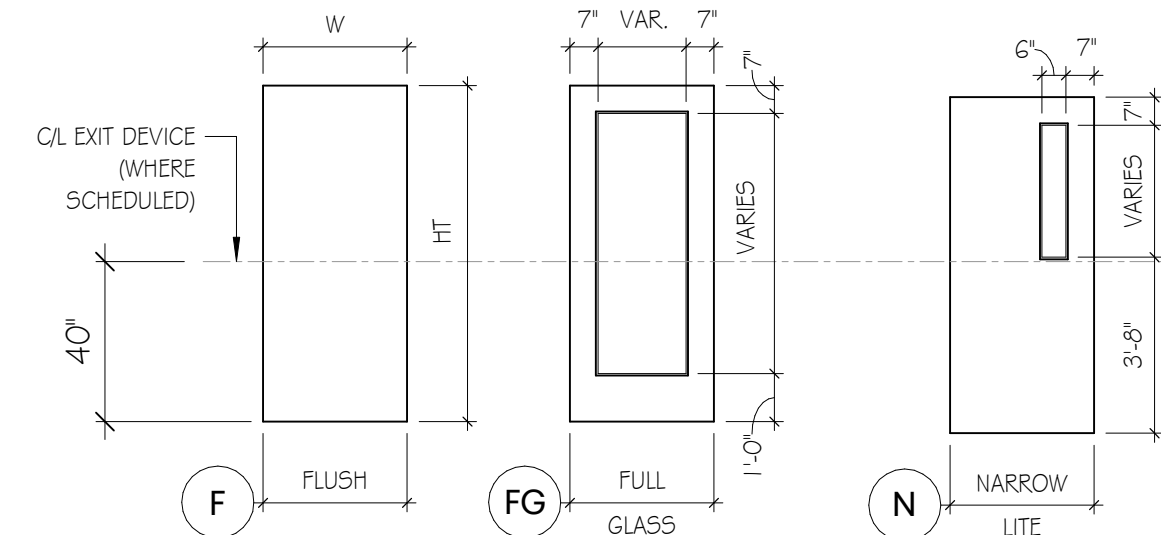


## DOOR TYPES - SPECIALTY DOORS

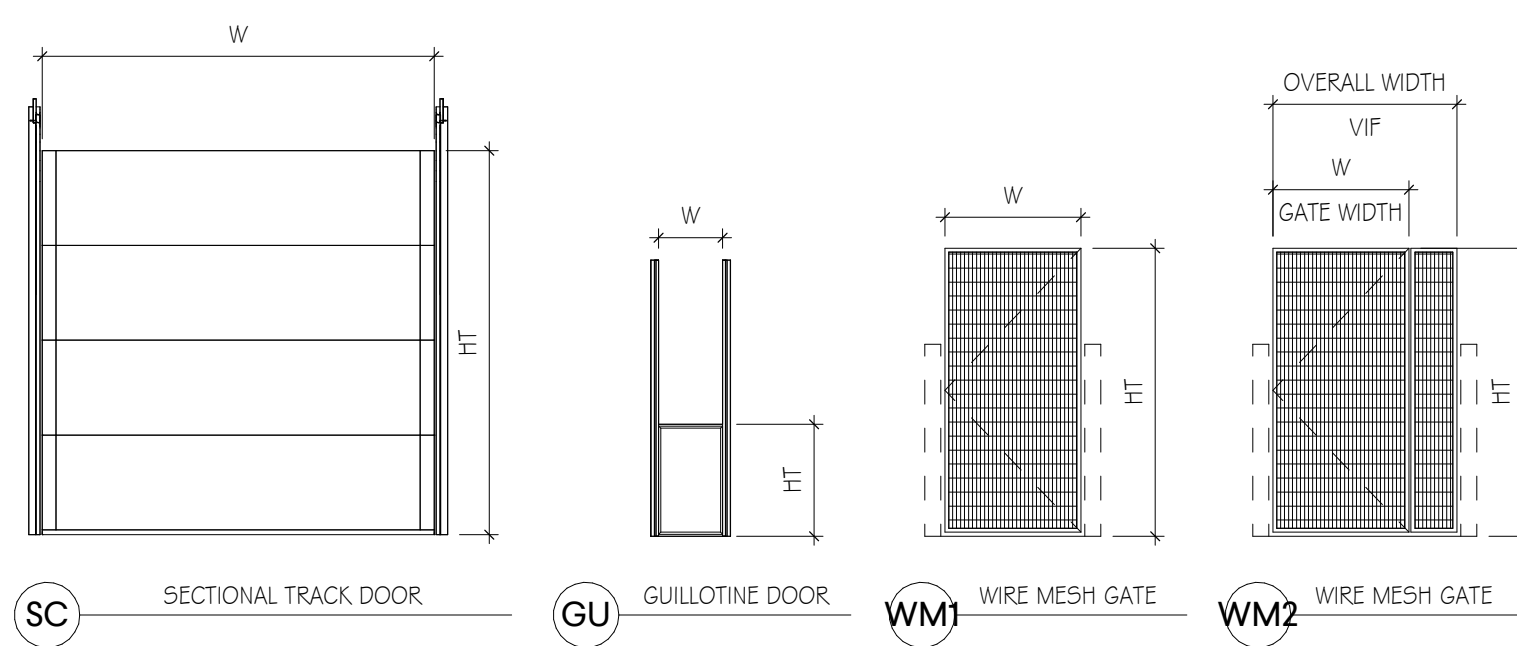

## FRAME TYPES - HOLLOW METAL

### MASONRY FRAMES

NOTE: ALL FRAMES TO BE FACE-WELDED EXCEPT WHERE NOTED 'KD'

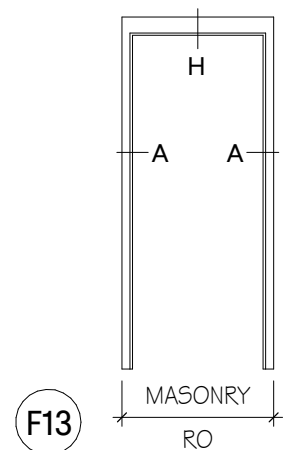


## DOOR NUMBERED NOTES

- MAGNETIC HOLD-OPEN DEVICES
- AUTOMATIC DOOR OPERATOR, SEE SPECIFICATION 08.7100
- AUTOMATIC ENTRANCE DOORS, SEE SPECIFICATIONS
- ALUMINUM-FRAMED ENTRANCE DOORS, SEE SPECIFICATIONS
- ALL-GLASS ENTRANCE DOORS, SEE SPECIFICATIONS
- ALUMINUM-FRAMED IG/ICCU DOOR, SEE SPECIFICATIONS
- SLIDING IG/ICCU DOOR, SEE SPECIFICATIONS
- SLIDING EXAM ROOM DOOR, SEE SPECIFICATIONS
- OVERHEAD DOOR, SEE SPECIFICATIONS
- OVERHEAD COILING GRILLE, SEE SPECIFICATIONS
- LEAD-LINED DOOR AND FRAME, SEE SPECIFICATIONS 08.1416 & 13.4900
- RF DOOR TO BE PROVIDED COMPLETE WITH HARDWARE BY RF SHIELDING VENDOR
- INTEGRAL BLINDS BETWEEN 2 PANES ULTRACLEAR GLASS (UPPER LITES ONLY)
- PROVIDE OPAQUE FILM AT DOOR GLAZING
- THERMAL RATED (INSULATED) ASSEMBLY
- SOUND RATED DOOR ASSEMBLY. MATCH RATING OF PARTITION IN WHICH LOCATED
- DOOR EDGE CONSTRUCTION: SEAMLESS
- LEVEL 3 AND PHYSICAL PERFORMANCE LEVEL A [EXTRA HEAVY-DUTY]
- EGRESS - EXIT ONLY DOOR
- CARD READER, SEE SPECIFICATION 08.7100
- STORM SHELTER DOOR
- PROVIDE SMOKE SEALS AND POSITIVE LATCHING
- PROVIDE POSITIVE LATCHING & LOCKSET. SEE HARDWARE SCHEDULE FOR FUNCTION
- SEE PLANS AND ELEVATIONS FOR MASONRY OPENING
- NOT USED.
- NOT USED.
- NOT USED.
- NOT USED
- NOT USED

## DOOR GENERAL NOTES

- GENERAL:**  
A. DOOR AND/OR FRAME CONSTRUCTION SHALL BE AS SPECIFIED UNLESS NOTED OTHERWISE.  
B. ALL TYPES OF DOORS ARE REPRESENTED IN THIS SCHEDULE FOR CONVENIENCE. WHERE MORE DESCRIPTIVE INFORMATION MAY BE LOCATED ELSEWHERE, NOTATION IS MADE IN THE NUMBERED NOTES COLUMN. (E.G. ALUMINUM FRAMED ENTRANCE DOORS. SEE SPECIFICATIONS)
- MATERIAL AND FINISH:**  
A. MATERIALS AND FINISHES INDICATED ON THE SCHEDULE ARE AS FOLLOWS:  
HM HOLLOW METAL  
ST STEEL  
STS STEEL / STAINLESS OR STAINLESS CLAD  
WM STAINLESS STEEL WELDED WIRE MESH  
WD SOLID CORE WOOD  
WD/PL WOOD / PLASTIC LAMINATE FACED  
WD/IR WOOD / IMPACT-RESISTANT VINYL-FACED  
AL ALUMINUM  
GL GLAZING GLASS  
PREFIN PREFINISHED (OR FACTORY FINISHED)  
PMT PAINTED  
STN STAINED
- GLASS:**  
A. GLASS TYPES INDICATED ON THE SCHEDULE ARE AS FOLLOWS (SEE SPECIFICATION SECTIONS 08.6000 "GLAZING" & 1.3.4900 "RADIATION PROTECTION"):  
**MONOLITHIC:**  
G1 6.0mm CLEAR, TEMPERED  
**INSULATING:**  
IG1 1 INCH INSULATING, VISION LITE  
IG2 1 INCH INSULATING, SPANDREL LITE  
IG3 1 INCH INSULATED, VISION LITE, TEMPERED
- LOUVERS:**  
A. DOOR LOUVER TYPES INDICATION ON THE SCHEDULE ARE AS FOLLOWS:  
L1 A' W X B' H, SIGHT PROOF, WEATHER RESISTANT, WITH INSECT SCREEN  
L2 A' W X B' H, LIGHT PROOF
- DOOR HARDWARE:**  
A. "HARDWARE SET NUMBER" REFERS TO HARDWARE SETS SPECIFIED IN SPECIFICATION SECTION 08.7100 "DOOR HARDWARE".

## FRAME PROFILES

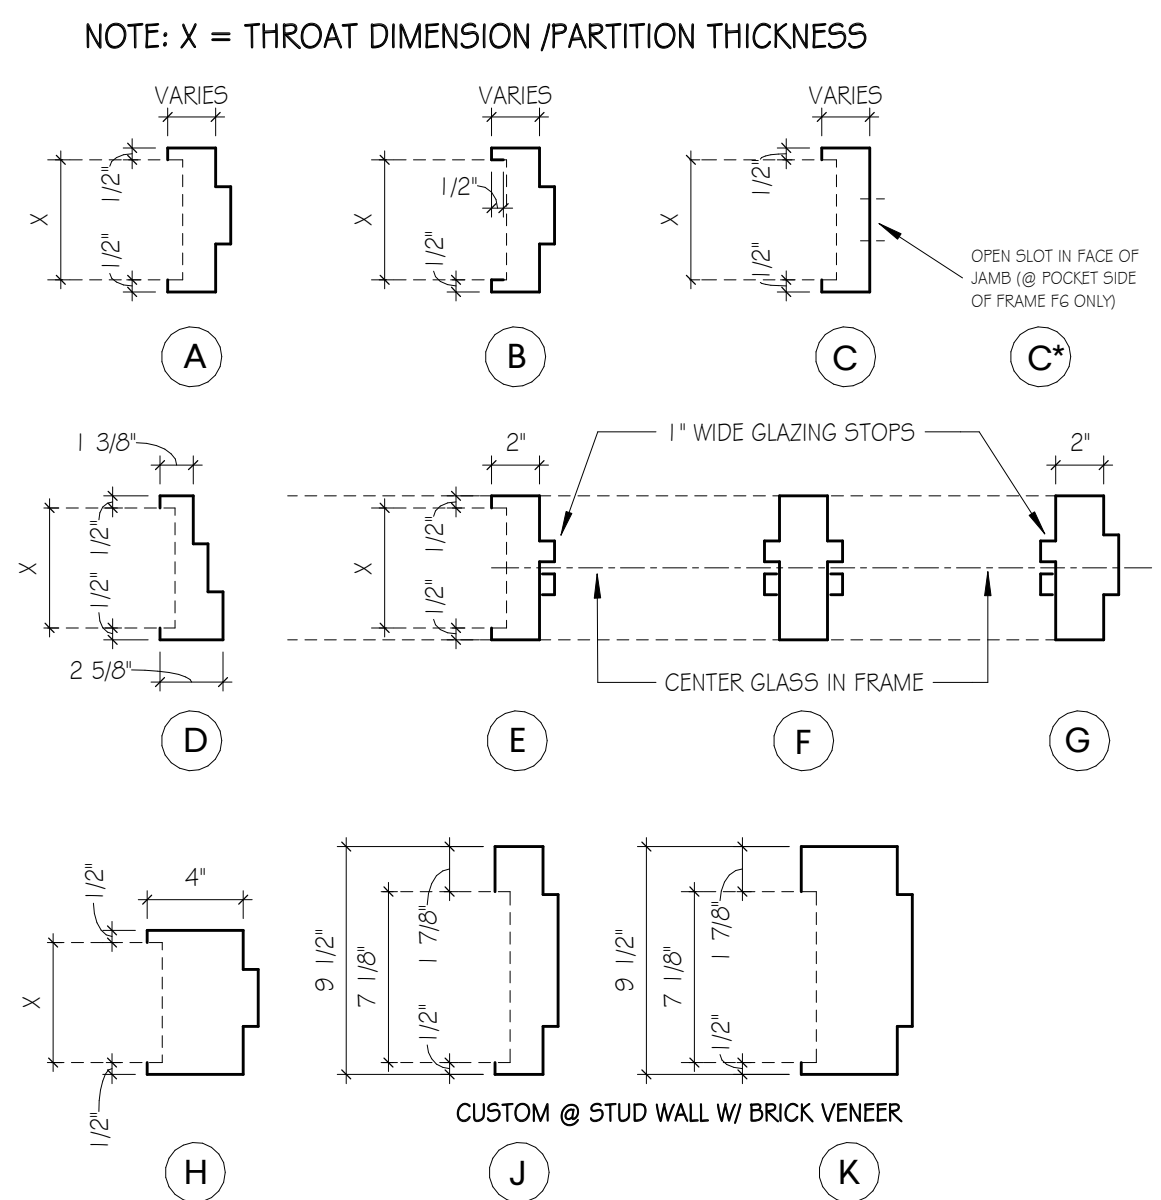

FRANKLIN CO. ANIMAL CONTROL FACILITY

GEORGE FRALEY PARKWAY  
WINCHESTER, TN 37398

DOOR SCHEDULE,  
LEGEND, & NOTES

A6.01

ISSUE DATE

PERMIT DOCUMENTS 12-12-2023

DRAWN BY:

CHECKED BY:

Goodwyn Mills Cawood, LLC  
3310 West End Avenue, Suite 420  
Nashville, TN 37203

T 615.333.7200

GMCNETWORK.COM

GMC