

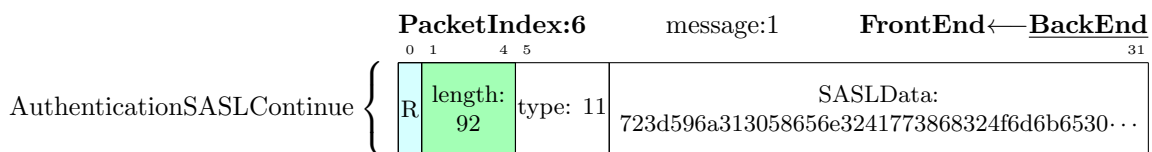
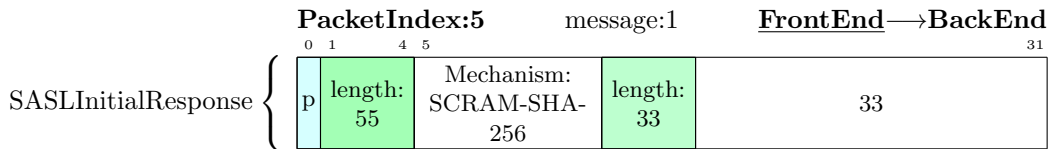
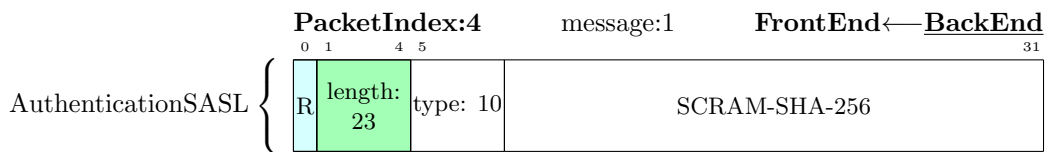
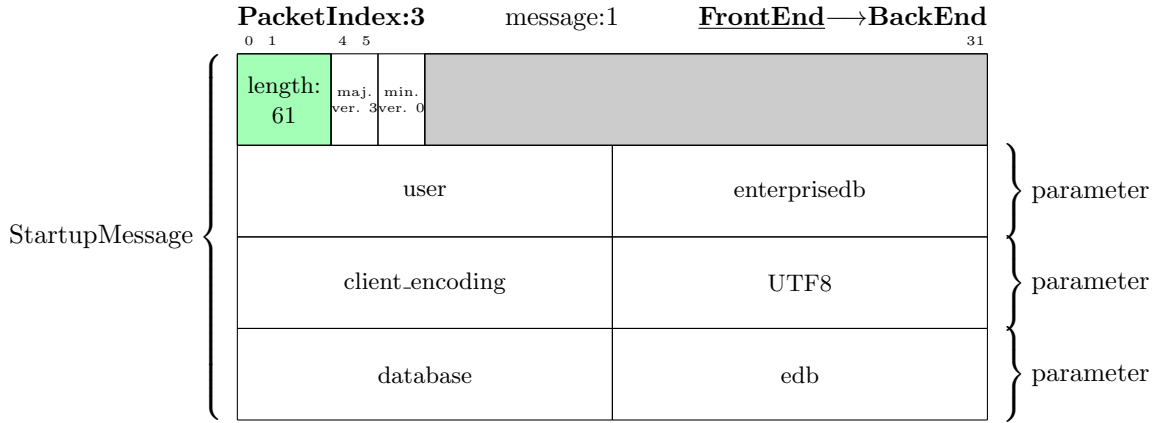
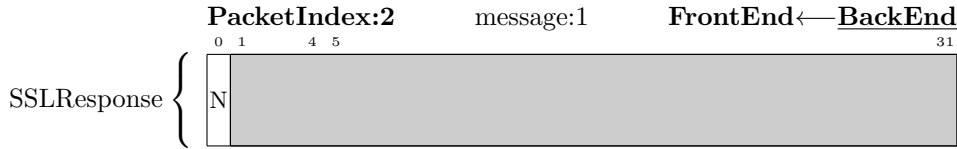


PostgreSQL packets. 12 packet(s).

Packets are grouped in conversations. A conversation ends when backend is issuing a ReadyForQuery message.


1 Conversation

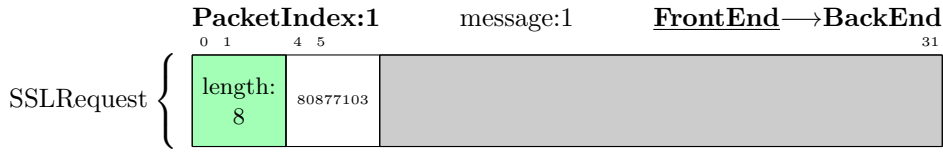

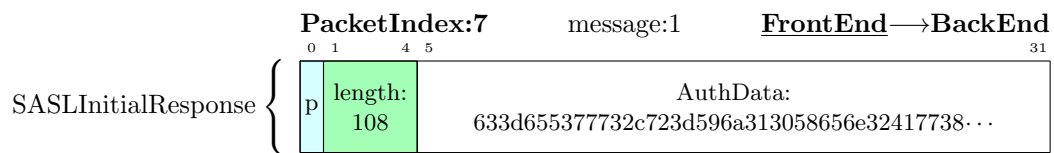

		PacketIndex:8				messages:19				FrontEnd←BackEnd											
		0	1	4	5	31															
AuthenticationSASLFinal	{	R	length: 54	type: 12	Outcome: 763d2b52546b77782b3363444d775731414e71484...																
		R	length: 8	type: 0																	
ParameterStatus	{	S	length: 27	IntervalStyle				postgres													
ParameterStatus	{	S	length: 20	is_superuser				on													
ParameterStatus	{	S	length: 23	db_dialect				redwood													
ParameterStatus	{	S	length: 35	standard_conforming_strings				on													
ParameterStatus	{	S	length: 39	session_authorization				enterprisedb													
ParameterStatus	{	S	length: 25	client_encoding				UTF8													
ParameterStatus	{	S	length: 26	server_version				17.0.0													
ParameterStatus	{	S	length: 25	server_encoding				UTF8													
ParameterStatus	{	S	length: 23	in_hot_standby				off													
ParameterStatus	{	S	length: 25	integer_datetimes				on													
ParameterStatus	{	S	length: 26	TimeZone				Europe/Paris													
ParameterStatus	{	S	length: 22	application_name																	
ParameterStatus	{	S	length: 38	default_transaction_read_only				off													
ParameterStatus	{	S	length: 26	scram_iterations				4096													
ParameterStatus	{	S	length: 33	DateStyle				Redwood, SHOW_TIME													
BackendKeyData	{	K	length: 12	PID: 62624	SecretKey: 3079928100																
		Z	length: 5	Idle																	

2 Conversation

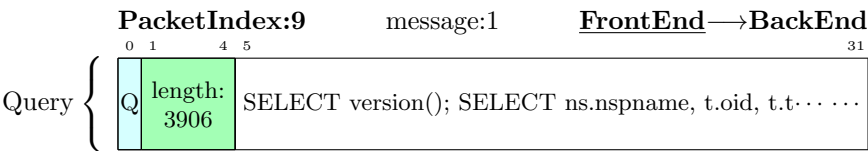

Row Description	{	T	length: 32	fields 1								
		name: version				table oid: 0	index: 0	type oid: 25	length: -1	type modifier: -1	Text	} column 1 version
DataRow	{	D	length: 119	fields: 1								
		length: 109	PostgreSQL 17.0 (EnterpriseDB Advanced Server 17.0·...								} field 0 version	
CommandComplete	{	C	length: 13	SELECT 1								
		T	length: 164	fields 6								
Row Description	{	name: nspname				table oid: 2615	index: 2	type oid: 19	length: 64	type modifier: -1	Text	} column 1 nspname
		name: oid				table oid: 1247	index: 1	type oid: 26	length: 4	type modifier: -1	Text	
		name: typename				table oid: 1247	index: 2	type oid: 19	length: 64	type modifier: -1	Text	} column 3 typename
		name: typtype				table oid: 0	index: 0	type oid: 18	length: 1	type modifier: -1	Text	
		name: typnotnull				table oid: 1247	index: 25	type oid: 16	length: 1	type modifier: -1	Text	} column 5 typnotnull
		name: elemtypoid				table oid: 1247	index: 1	type oid: 26	length: 4	type modifier: -1	Text	
DataRow	{	D	length: 57	fields: 6								
		length: 10	pg_catalog								} field 0 nspname	
		length: 3	194									} field 1 oid
		length: 12	pg_node_tree								} field 2 typename	
		length: 1	b									} field 3 typtype
		length: 1	f								} field 4 typnotnull	
		length: -1										} field 5 elemtypoid

