


Getting started

Read Evaluate Print Loop

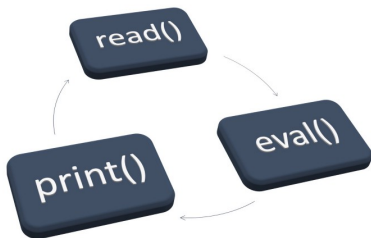

REPL: normal mode

Just click on the app icon



REPL: normal mode (commands)

Some commands to know:

Load (and run) a program

`include("filename.jl")`

Interrupt execution

`[Ctrl] + [C]`

Recall last result

`ans`

Previous-run command

Up key

Search backwards into history

`[Ctrl] + [r]`

Tab-completion

`characters + [Tab]`

Clear screen

`[Ctrl] + [L]`

Exit REPL

`exit()` or `[Ctrl] + [D]`

REPL: normal mode (commands)

Some commands to know:

Load (and run) a program

`include("filename.jl")`

Interrupt execution

`[Ctrl] + [C]`

Recall last result

`ans`

Previous-run command

Up key

Search backwards into history

`[Ctrl] + [r]`

Tab-completion

`characters + [Tab]`

Clear screen

`[Ctrl] + [L]`

Exit REPL

`exit()` or `[Ctrl] + [D]`

REPL: normal mode (commands)

Some commands to know:

Load (and run) a program

`include("filename.jl")`

Interrupt execution

`[Ctrl] + [C]`

Recall last result

`ans`

Previous-run command

Up key

Search backwards into history

`[Ctrl] + [r]`

Tab-completion

`characters + [Tab]`

Clear screen

`[Ctrl] + [L]`

Exit REPL

`exit()` or `[Ctrl] + [D]`


REPL: normal mode (commands)

Some commands to know:

Load (and run) a program	<code>include("filename.jl")</code>
Interrupt execution	<code>[Ctrl] + [C]</code>
Recall last result	<code>ans</code>
Previous-run command	Up key
Search backwards into history	<code>[Ctrl] + [r]</code>
Tab-completion	<code>characters + [Tab]</code>
Clear screen	<code>[Ctrl] + [L]</code>
Exit REPL	<code>exit()</code> or <code>[Ctrl] + [D]</code>

REPL: help mode

```
julia> ?
```



The screenshot shows a terminal window with a title bar that reads "xavierng — julia — 80x24". The terminal content is as follows:

```

[MacBook-de-xavierng-2:~ xavierng$ julia

Documentation: https://docs.julialang.org
Type "?" for help, "]" for Pkg help.
Version 1.9.1 (2023-06-07)
Official https://julialang.org/ release

[help?> VERSION
search: VERSION VersionNumber versioninfo pkgversion reverseind

VERSION

A VersionNumber object describing which version of Julia is in use. See also
Version Number Literals.

julia> █
  
```

REPL: shell mode

julia> ;



The screenshot shows a macOS terminal window titled "xavierg — julia — 80x24". The prompt is "MacBook-de-xavierg-2:~ xavierg\$ julia". The Julia REPL has entered shell mode, displaying a large ASCII art logo of the letter "J" on the left. To the right of the logo, the following text is shown: "Documentation: <https://docs.julialang.org>", "Type '?' for help, ']?' for Pkg help.", "Version 1.9.1 (2023-06-07)", and "Official <https://julialang.org/> release". Below the logo, the shell prompt "[shell>]" is shown, followed by the command "pwd" and its output "/Users/xavierg". The shell prompt is now ready for another command.

Return to normal mode: [Backspace] on empty line

REPL: package manager mode

```
julia> ]
```

[illegible]

Return to normal mode: [Backspace] on empty line

REPL: package manager mode (commands)

Some commands to know:

add package(s) to project

`add`

remove package(s) from project

`remove` or `rm`

summarize contents

`status` or `st`

update packages

`update` or `up`

help online

`help`

