
P07 Cache-dialect fanout

Primitive / OBJECT INTERACTION / ANALYTICAL COLLABORATION

Adapt caching to provider-specific interfaces.

OBJECT INTERACTION

solid arrow: call/message · dashed open arrow: return/failure · analytical order, not an observed trace

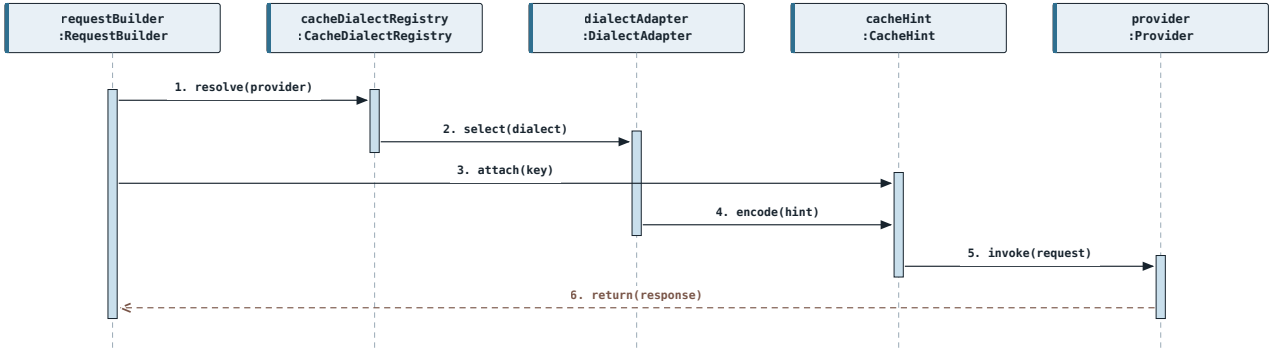

POINTCUT / PATTERN INTERFACE

CONTEXT	A request is built for a provider with cacheable context.
TRIGGER	A cache key, hint, or control record is attached.
STRUCTURE	Provider dialect adapter, cache identity, and response association.
EFFECT	Compatible cache controls are encoded and unsupported controls are rejected or omitted.

CONTRACT / REQUIRED BEHAVIOR

REQUIRES	Provider capability and cache identity are known before dispatch.
ENSURES	Cache control maps to the request without changing semantic content.
INVARIANT	Cache identity never crosses user, tenant, or incompatible provider boundaries.
VIOLATION	Unsupported or invalid hints degrade explicitly without silent semantic drift.

Sources: protocol/pattern_diagram_models.yaml (participants + messages); protocol/harness_pattern_specification.yaml (pointcut + contract).

Analytical collaboration only; no repository execution or message order is asserted.