
P08 Multi-provider transport abstraction

Primitive / OBJECT INTERACTION / ANALYTICAL COLLABORATION

Swap model backends.

OBJECT INTERACTION

solid arrow: call/message · dashed open arrow: return/failure · analytical order, not an observed trace

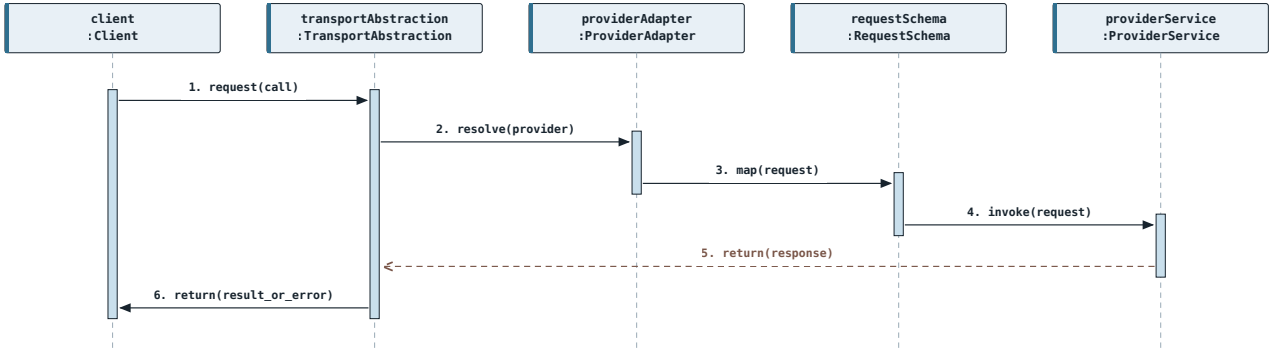

POINTCUT / PATTERN INTERFACE

CONTEXT	A harness can select among model backends.
TRIGGER	The runtime resolves or invokes a model provider.
STRUCTURE	A shared request/response/error boundary plus provider-specific implementations.
EFFECT	Backends are interchangeable through a declared interface, with differences exposed.

CONTRACT / REQUIRED BEHAVIOR

REQUIRES	Provider identity, model configuration, and common result types are available.
ENSURES	Every provider satisfies the same invocation contract or reports unsupported behavior.
INVARIANT	Provider-specific state remains behind the adapter boundary.
VIOLATION	Authentication, rate, schema, and capability errors map to explicit types.

Sources: protocol/pattern_diagram_models.yaml (participants + messages); protocol/harness_pattern_specification.yaml (pointcut + contract).

Analytical collaboration only; no repository execution or message order is asserted.