
P12 Coordinator-worker spawn flow

Primitive / OBJECT INTERACTION / ANALYTICAL COLLABORATION

Delegate bounded subtasks.

OBJECT INTERACTION

solid arrow: call/message · dashed open arrow: return/failure · analytical order, not an observed trace

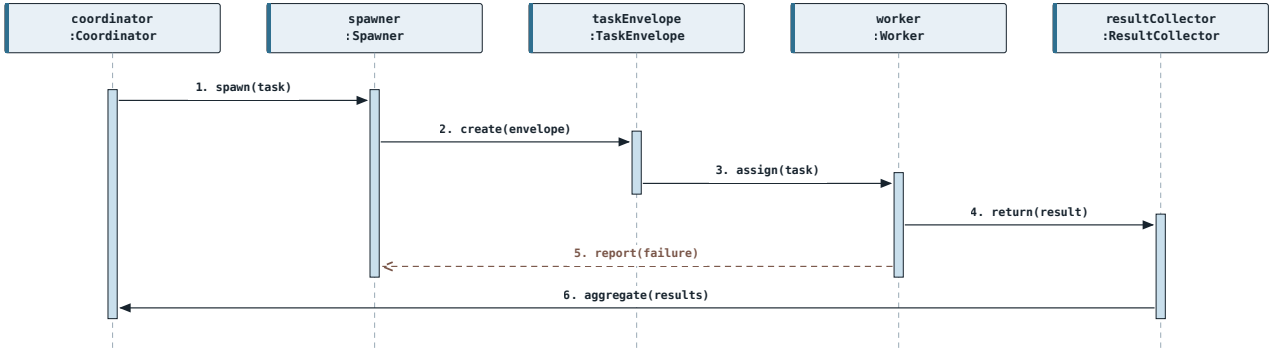

POINTCUT / PATTERN INTERFACE

CONTEXT	A coordinator delegates a bounded task to another execution unit.
TRIGGER	A worker is spawned, called as a tool, or handed a task.
STRUCTURE	Task envelope with identity, instructions, authority, budget, and result target.
EFFECT	Worker output returns to the coordinator with explicit lifecycle and provenance.

CONTRACT / REQUIRED BEHAVIOR

REQUIRES	Parent and child identities, task scope, and shared data policy are known.
ENSURES	Each worker has one task record, bounded authority, and a correlated result.
INVARIANT	Delegation never silently expands permissions or budget.
VIOLATION	Cancellation, worker failure, timeout, and duplicate spawn are typed outcomes.

Sources: protocol/pattern_diagram_models.yaml (participants + messages); protocol/harness_pattern_specification.yaml (pointcut + contract).

Analytical collaboration only; no repository execution or message order is asserted.