
P14 Event-sourced conversation engine

Primitive / OBJECT INTERACTION / ANALYTICAL COLLABORATION

Reconstruct state from recorded events.

OBJECT INTERACTION

solid arrow: call/message · dashed open arrow: return/failure · analytical order, not an observed trace

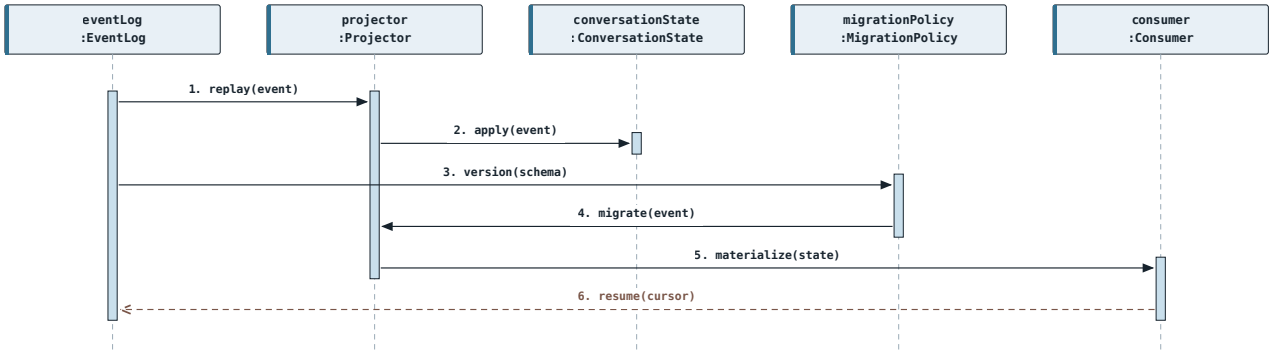

POINTCUT / PATTERN INTERFACE

CONTEXT	Conversation state is derived from recorded events.
TRIGGER	A new event is appended or history is loaded.
STRUCTURE	Event schema, sequence or identity rules, and a projector.
EFFECT	The current view is reproducible from the event history.

CONTRACT / REQUIRED BEHAVIOR

REQUIRES	Events are immutable enough to replay and schema versions are identifiable.
ENSURES	Applying the same ordered events yields the same semantic state.
INVARIANT	Projection never mutates historical event identity.
VIOLATION	Missing, incompatible, or corrupt events produce recoverable migration or rejection.

Sources: protocol/pattern_diagram_models.yaml (participants + messages); protocol/harness_pattern_specification.yaml (pointcut + contract).

Analytical collaboration only; no repository execution or message order is asserted.