One model, two execution stages

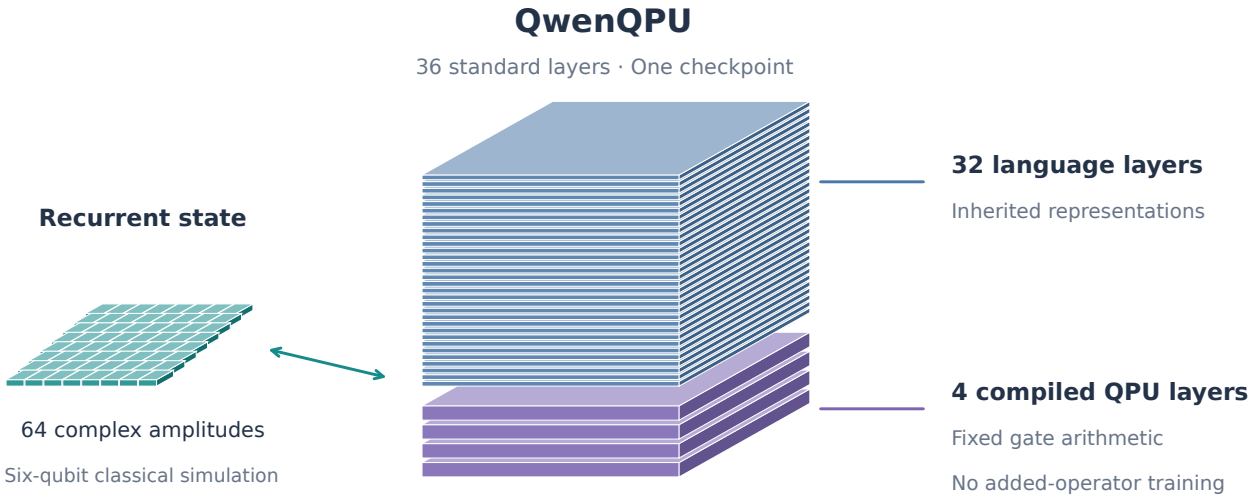

Circuit + events → Language request → Host scheduling → QPU execution → Probability output

Language and numerical execution share the same model; the host schedules calls.