


```
[root@localhost ~]# df -h
```

Filesystem	Size	Used	Avail	Use%	Mounted on
/dev/mapper/centos7-root	100 GiB	22 GiB	78 GiB	22%	/
/dev/sda1	100 GiB	22 GiB	78 GiB	22%	/boot
tmpfs	600 MiB	0	600 MiB	0%	/dev/shm
tmpfs	16 KiB	0	16 KiB	0%	/run
tmpfs	7.0 MiB	0	7.0 MiB	0%	/tmp
tmpfs	180 MiB	0	180 MiB	0%	/var/tmp
centos7	100 GiB	22 GiB	78 GiB	22%	centos7

4. 下载 RabbitMQ 官方 RPM 包


本次下载的版本是 **rabbitmq-server-generic-unix-3.13.2**

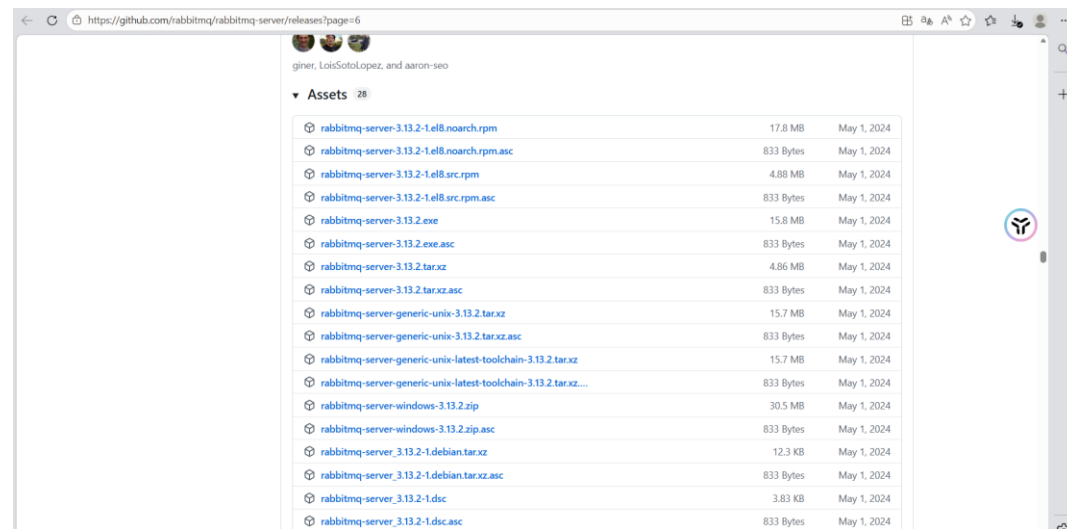

可以在浏览直接输入以下网址，快速下载，不用翻墙访问外网：

<https://ghproxy.net/https://github.com/rabbitmq/rabbitmq-server/releases/download/v3.13.2/rabbitmq-server-generic-unix-3.13.2.tar.xz>

下载完成之后将其上传到/opt 目录，并进行解压

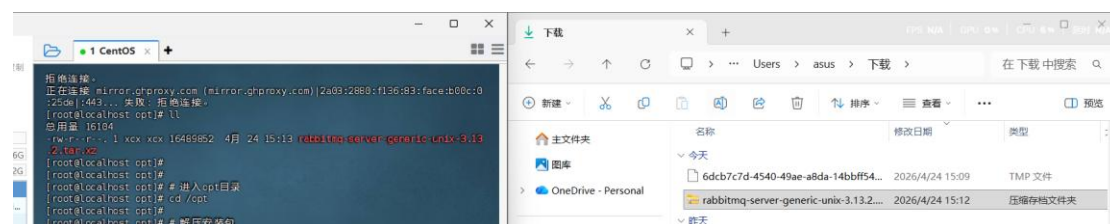

解压

```
[root@localhost opt]# tar -xvf rabbitmq-server-generic-unix-3.13.2.tar.xz
rabbitmq_server-3.13.2/
```

5.配置环境变量并验证是否生效

```
[root@localhost ~]# echo 'export PATH=$PATH:/opt/rabbitmq_server-3.13.2/sbin'
>> /etc/profile
[root@localhost ~]# source /etc/profile
[root@localhost ~]# rabbitmqctl version
3.13.2
```

和我们下载版本一致，环境变量已经配置完成

6.配置防火墙放行策略

和前面一样还是有两种方法：关闭防火墙，或者放行 RabbitMQ 的端口号

5672、15672、25672 是 RabbitMQ 常用的端口号

选择关闭防火墙

```
[root@localhost ~]# systemctl stop firewalld
[root@localhost ~]# systemctl status firewalld
o firewalld.service - firewalld - dynamic firewall daemon
   Loaded: loaded (/usr/lib/systemd/system/firewalld.service; disabled; pre>
   Active: inactive (dead)
   Docs: man:firewalld(1)

4月 24 13:57:01 localhost systemd[1]: Starting firewalld - dynamic firewall d>
4月 24 13:57:02 localhost systemd[1]: Started firewalld - dynamic firewall da>
4月 24 15:15:54 localhost.localdomain systemd[1]: Stopping firewalld - dynami>
4月 24 15:15:54 localhost.localdomain systemd[1]: firewalld.service: Deactiva>
4月 24 15:15:54 localhost.localdomain systemd[1]: Stopped firewalld - dynamic>
lines 1-10/10 (END)
```

7.启动 RabbitMQ 服务

```
[root@localhost ~]# rabbitmq-plugins enable rabbitmq_management
Enabling plugins on node rabbit@localhost:
  rabbitmq_management
The following plugins have been configured:
  oauth2_client
  rabbitmq_management
  rabbitmq_management_agent
  rabbitmq_web_dispatch
Applying plugin configuration to rabbit@localhost...
The following plugins have been enabled:
  oauth2_client
  rabbitmq_management
  rabbitmq_management_agent
  rabbitmq_web_dispatch
started 4 plugins.
```

开启网页管理后台，不是
linux 语言，而是安装
RabbitMQ 后，该服务提供的
语言

出现类似内容，说明服务已启动

8.创建专属管理员用户

```
[root@localhost ~]# rabbitmqctl add_user Admin Admin2026*
Adding user "Admin" ...
Done. Don't forget to grant the user permissions to some virtual hosts! See 'r
abbitmqctl help set_permissions' to learn more.
[root@localhost ~]# rabbitmqctl set_permissions -p / "Admin" ".*" ".*" ".*"
Setting permissions for user "Admin" in vhost "/" ...
[root@localhost ~]# rabbitmqctl set_user_tags Admin administrator
Setting tags for user "Admin_administrator" to [] ...
Error:
User "Admin_administrator" does not exist
[root@localhost ~]# rabbitmqctl set_user_tags Admin administrator
Setting tags for user "Admin" to [administrator] ...
[root@localhost ~]#
```

创建用户和密码


给 Admin 一个最大权限

给 Admin 一个管理员标签

9.进入浏览器进行访问

在地址栏输入：服务器 IP:RabbitMQ 的端口号 = 192.168.56.101:15672


进入登陆界面

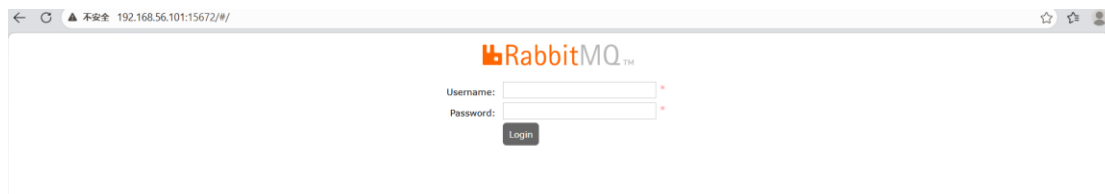

输入刚刚创建的账户：Admin，密码：Admin2026*



访问成功，本服务搭建成功

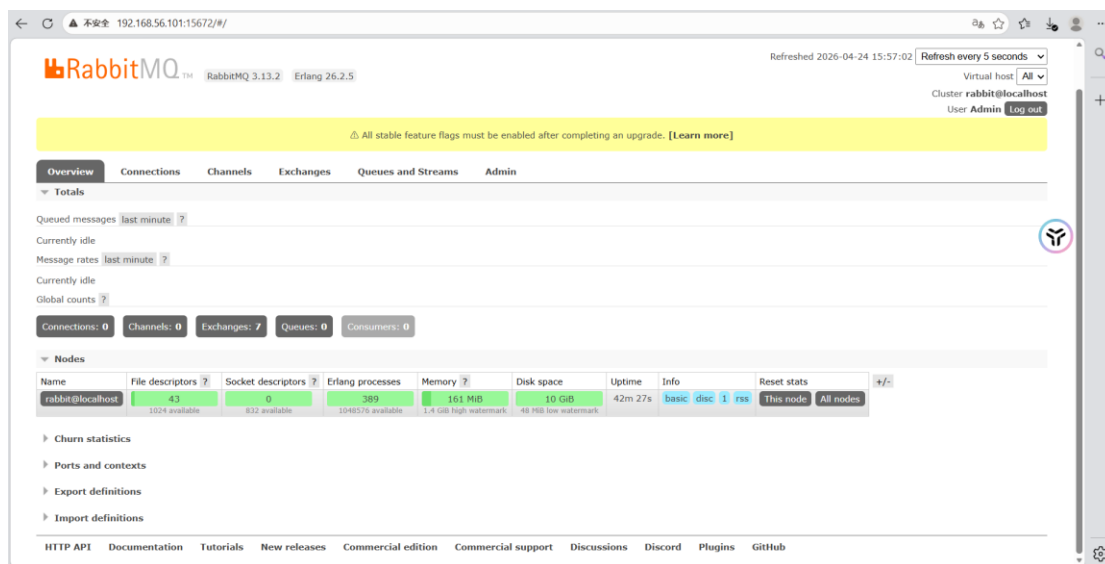

10.查看 RabbitMQ 绑定的端口号

