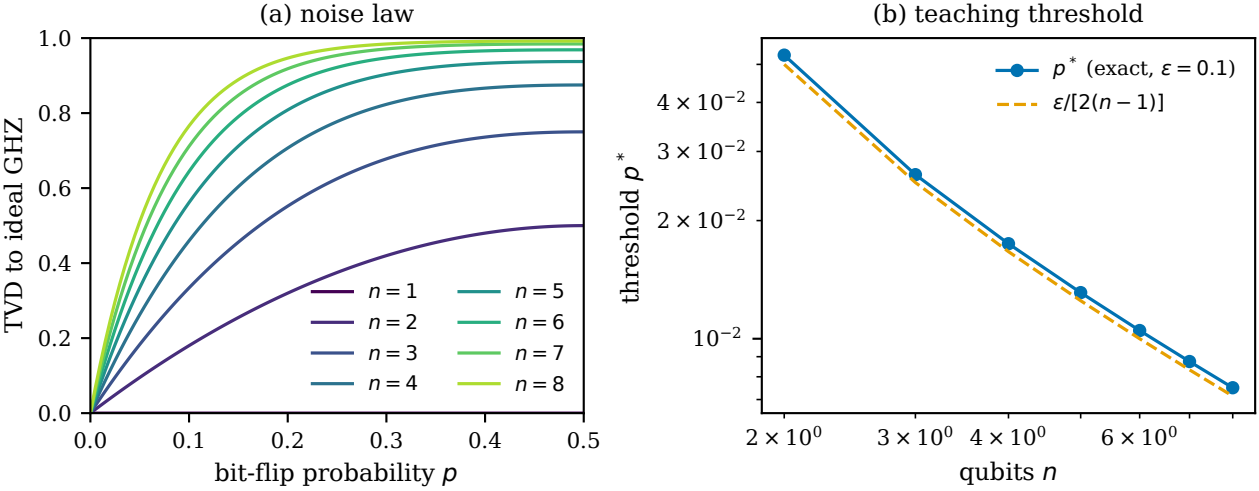
(a) noise law
TVD to ideal GHZ
bit-flip probability p
$n = 1$
$n = 2$
$n = 3$
$n = 4$
$n = 5$
$n = 6$
$n = 7$
$n = 8$
(b) teaching threshold
threshold p^*
qubits n
p^* (exact, $\varepsilon = 0.1$)
$\varepsilon/[2(n-1)]$