

已经部署好的项目,直接点立即构建就可以打包,很容易

部署项目:


1. 在界面左上角有新建任务:



1. 输入任务名称,然后选择类型,maven项目可以选择 "构建一个maven项目", 或者在最下面复制一个已有的项目(输入项目名称):



1. 填写配置项并保存:

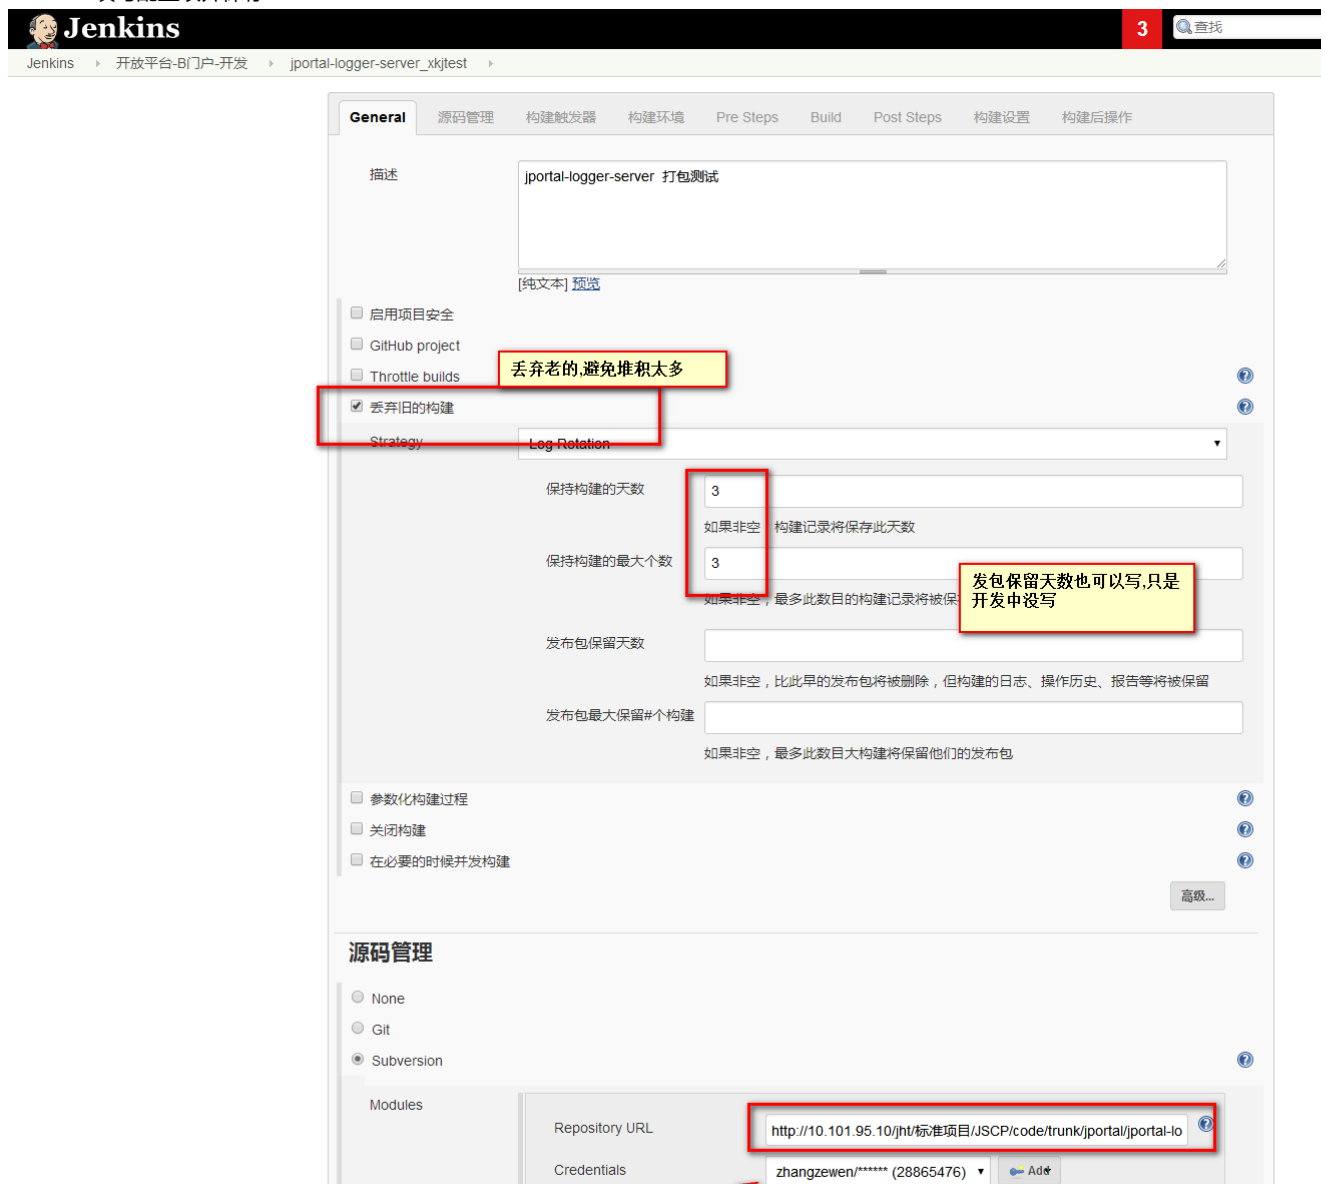

选择源码来源,这里用的是svn

Jenkins账号

Additional Credentials

Check-out Strategy Emulate clean checkout by first deleting unversioned/ignored files, then 'svn update'

Jenkins will first remove all the unversioned/modified files/directories, as well as files/directories ignored by "svn:ignore", then execute "svn update". This emulates the fresh check out behaviour without the cost of full checkout.

Quiet check-out

源代码浏览器

(自动)

高级...

构建触发器

- ☐ Build whenever a SNAPSHOT dependency is built
- ☐ 触发远程构建 (例如,使用脚本)
- ☐ Build after other projects are built
- ☐ Build periodically
- ☐ GitHub hook trigger for GITScm polling
- ☐ Poll SCM

构建环境

- ☐ Delete workspace before build starts
- ☐ Use secret text(s) or file(s)
- ☐ Send files or execute commands over SSH before the build starts
- ☒ Send files or execute commands over SSH after the build runs

SSH Publishers

SSH Server

Name

B门户开发环境

服务器路径,在Jenkins配置中心配置

理解为打包后的路径

会把包放在这个路径下,前缀在"name"的配置中

打包后执行的命令(这里做了解压包,并替换以前的,并重启)

Transfers

Transfer Set

Source files

target/portal-logger-server-package.zip

Remove prefix

target/

Remote directory

zip/

Exec command

```
cd /home/jht/portal/zip
sh jenkinsdeploy-jportal-logger-server.sh
```

Either Source files, Exec command or both must be supplied

All of the transfer fields (except for Exec timeout) support substitution of [Jenkins environment variables](#)

Add Server

高级...

Pre Steps

Add pre-build step

Build

Root POM

pom.xml

Goals and options

package

Jenkins在pom.xml执行的命令,也就是mvn命令,这里只执行package

☐ Run only if build succeeds ☐ Run only if build succeeds or is unstable ☒ Run regardless of build result

Should the post-build steps run only for successful builds, etc.

Add post-build step ▼

构建设置

☐ E-mail Notification

构建后操作

增加构建后操作步骤 ▼

保存 应用

生成页面: 2018-12-5 下午

配置中心:

10.101.90.171:8080/jenkins/configure

SSH Server

Name

Hostname Required. Cannot contain < & * * \

Username Required

Remote Directory Required

☒ Use password authentication, or use a different key

Passphrase / Password

Path to key

Key

Jump host

Port 22

Timeout (ms) 300000

保存 应用

填写密码,服务器一般都是有密码的