后端技术：后端采用**SpringBoot3+MyBatis + MySQL + Lombok（自动生成模板代码）**，采用 REST 接口
使用软件：vscode，豆包，codebuddy

数据库设计（online_shop）：

id # int	buyer_name ABC varchar(128)	phone ABC varchar(64)	token ABC varchar(8)	status ABC varchar(20)	created_at datetime	updated_at datetime	product_id # int
(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)


intent

product

id # int	name ABC varchar(255)	description ABC text	image_url ABC varchar(512)	price # decimal(10,2)	status ABC varchar(20)	published_at datetime	closed_at datetime	seller_id ABC varchar(64
	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)

username ABC varchar(64)	password_hash ABC varchar(255)
seller01	$2a$10$N.zmdr9k7uOC(

seller

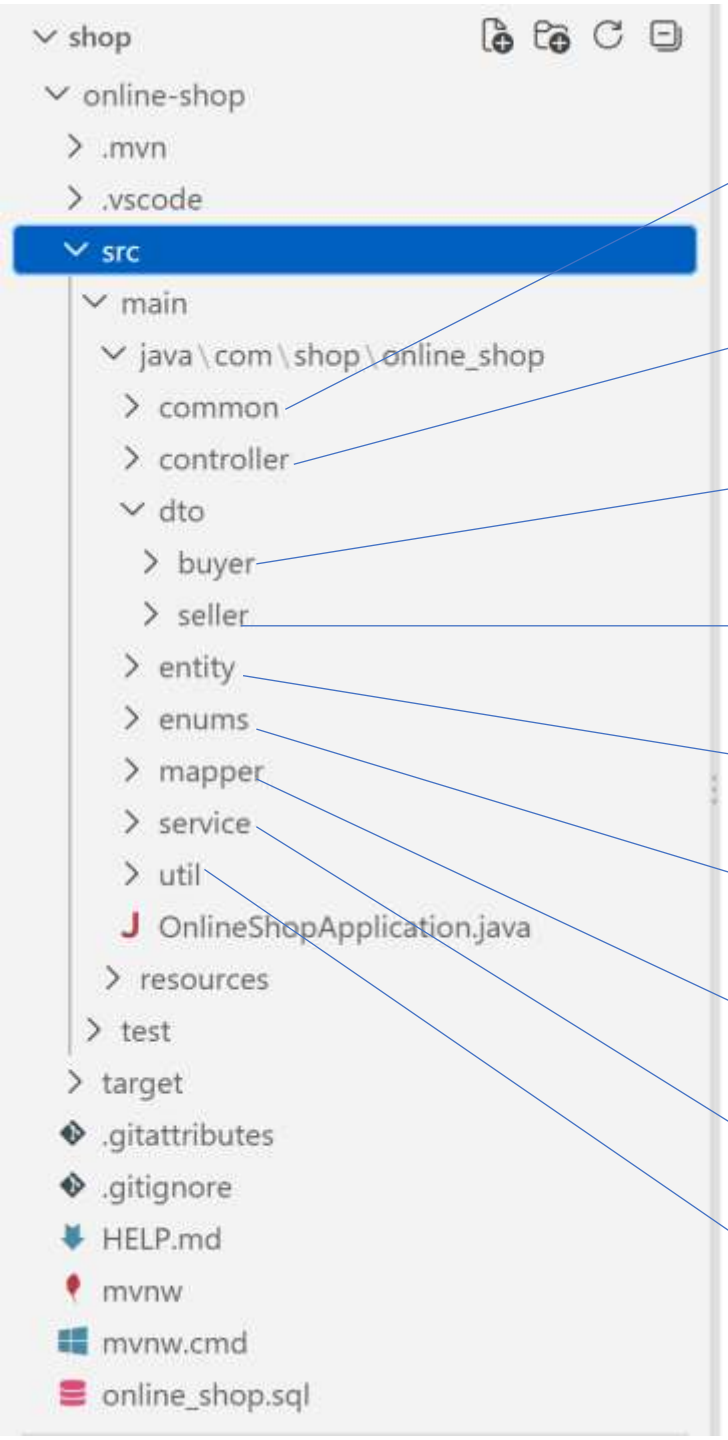

公共通用代码：全局异常处理、返回结果封装、工具常量

控制器层【REST接口】接收前端http请求，返回JSON

买家的数据传输对象，接收前端提交/返回给前端的数据

卖家的数据传输对象

实体类，和MySQL数据库表一一对应，加@Data(lombok)

枚举：订单状态、商品状态（状态机流转放这里）

MyBatis-Mapper接口，操作数据库，没有实现类

业务逻辑层，写项目业务代码，调用mapper操作数据库

小工具类：密码加密、时间处理等

```
12.1-win32-x86_64\bin\java.exe' '@C:\Users\GQ\AppData\Local\Temp\cp_3eqo0p4srfrm25xsnkuf6yshv.argfil
e' 'com.shop.online_shop.OnlineShopApplication'


  .   ____          _            __ _ _
 /\\ / ___'_ __ _ _(_)_ __  __ _ \ \ \ \
( ( )\___ | '_ | '_| | '_ \/ _` | \ \ \ \
 \\/  ___)| |_)| | | | | || (_| |  ) ) ) )
  '  |____| .__|_| |_|_| |_\__, | / / / /
 =========|_|==============|___/=/_/_/_/
 :: Spring Boot ::                (v3.2.8)

2026-10-14T18:50:41.548+08:00  INFO 10812 --- [           main] c.s.online_shop.OnlineShopApplicatio
n    : Starting OnlineShopApplication using Java 21.0.12.1 with PID 10812 (D:\GQ\online-shop-copy\on
line-shop-copy\target\classes started by GQ in D:\GQ\online-shop-copy)
2026-10-14T18:50:41.548+08:00 DEBUG 10812 --- [           main] c.s.online_shop.OnlineShopApplicatio
n    : Running with Spring Boot v3.2.8, Spring v6.1.11
2026-10-14T18:50:41.548+08:00  INFO 10812 --- [           main] c.s.online_shop.OnlineShopApplicatio
n    : No active profile set, falling back to 1 default profile: "default"
2026-10-14T18:50:43.692+08:00  INFO 10812 --- [           main] o.s.b.w.embedded.tomcat.TomcatWebSer
ver  : Tomcat initialized with port 8080 (http)
2026-10-14T18:50:43.704+08:00  INFO 10812 --- [           main] o.apache.catalina.core.StandardServi
ce   : Starting service [Tomcat]
2026-10-14T18:50:43.713+08:00  INFO 10812 --- [           main] o.apache.catalina.core.StandardEngin
e    : Starting Servlet engine: [Apache Tomcat/10.1.26]
2026-10-14T18:50:43.794+08:00  INFO 10812 --- [           main] o.a.c.c.C.[Tomcat].[localhost].[/]
     : Initializing Spring embedded WebApplicationContext
2026-10-14T18:50:43.794+08:00  INFO 10812 --- [           main] w.s.c.ServletWebServerApplicationCon
text : Root WebApplicationContext: initialization completed in 2140 ms
Logging initialized using 'class org.apache.ibatis.logging.stdout.StdOutImpl' adapter.
Get /10.61.80.128 network interface
Get network interface info: name:wireless_32768 (Intel(R) Wi-Fi 6E AX211 160MHz)
Initialization Sequence datacenterId:1 workerId:9
 _ _   |_  _ _|_. ___ _ |    _
| | |\/|_)(_| | |_\  |_)||_|_\
     /               |
                        3.5.8
2026-10-14T18:50:44.953+08:00  INFO 10812 --- [           main] o.s.b.w.embedded.tomcat.TomcatWebSer
ver  : Tomcat started on port 8080 (http) with context path ''
2026-10-14T18:50:44.963+08:00  INFO 10812 --- [           main] c.s.online_shop.OnlineShopApplicatio
n    : Started OnlineShopApplication in 4.024 seconds (process running for 4.576)
```