

# Text Data Anonymizer:

A Local-First, Cross-Platform Desktop Tool for  
Interactive Anonymization of French Qualitative Text

Xiaoou Wang

*Maison des Sciences de l’Homme Sud-Est*

*Université Côte d’Azur*

`xiaoou.wang@univ-cotedazur.fr`

June 2026

## Abstract

Qualitative researchers in the social sciences and digital humanities routinely handle sensitive interview transcripts, field notes, and open-ended survey responses. Cloud-based anonymization services raise legitimate concerns about data sovereignty, reproducibility, and compliance with ethics protocols. We present **Text Data Anonymizer**, a cross-platform desktop application developed at the Maison des Sciences de l’Homme Sud-Est (MSHS Sud-Est) that supports a *human-in-the-loop* workflow for detecting and replacing named entities in French text entirely on the user’s machine. The tool combines a React/Electron front end with a persistent local Python NER service, offering three detection backends—spaCy (`fr_core_news_sm`, `fr_core_news_lg`) and CamemBERT NER—plus rule-based detectors for emails, URLs, phone numbers, and dates. Researchers review highlighted spans interactively, toggle replacement at the category or entity-value level, and export anonymized text with stable placeholders (e.g. `[PERSON_1]`), markdown audit reports, and Label Studio pre-annotations. A batch mode loads folders of `.txt` files, supports per-document review with optional automatic NER, and writes outputs live alongside source files. Standalone installers for macOS, Windows, and Linux bundle the NER engine via PyInstaller, requiring no separate Python installation for end users. We describe the system architecture, workflow, and an evaluation sketch on French interview-style materials, and discuss limitations regarding indirect identifiers and model errors. Source code, release binaries, and citation metadata are publicly available.

**Keywords:** anonymization, digital humanities, qualitative research, named entity recognition, French NLP, local-first software, research ethics

# 1 Introduction

Anonymization is a recurring obligation in qualitative and mixed-methods research. Interview excerpts, ethnographic notes, and participant-generated text often contain direct identifiers (personal names, organizations, precise locations) as well as quasi-identifiers (rare job titles, small communities, distinctive events) that can enable re-identification when combined with external knowledge [1]. Research teams therefore need practical tools that (i) assist detection of sensitive strings, (ii) preserve researcher control over what is removed or generalized, (iii) document decisions for ethics committees and data archives, and (iv) keep primary data on institutional or personal hardware rather than third-party servers.

General-purpose word processors and manual redaction remain common but scale poorly to large corpora and offer weak provenance trails. Meanwhile, high-quality French NER models are now available off the shelf through libraries such as spaCy [2] and transformer pipelines derived from CamemBERT [4, 3]. However, command-line NER outputs are insufficient for humanities workflows: scholars need visual review, correction of false positives, recovery of false negatives, category-level policies (e.g. replace people but keep organization mentions), and batch processing aligned with project folder structures.

**Text Data Anonymizer** addresses this gap as a research prototype and distribution-ready desktop application maintained in the context of research engineering at MSHS Sud-Est<sup>1</sup>, the regional Maison des Sciences de l’Homme hosted by Université Côte d’Azur. The tool targets French-language qualitative corpora but is designed so that entity categories and export formats support integration with annotation platforms such as Label Studio [5] and archival reporting requirements.

Our design principles are:

- **Local-first processing:** no telemetry and no default calls to external NLP APIs; text is sent only to a co-located NER subprocess.
- **Human-in-the-loop control:** automatic suggestions, never blind replacement.
- **Traceability:** audit reports listing category decisions and exact values replaced.
- **Cross-platform deployment:** the same workflow on macOS, Windows, and Linux through Electron and platform-specific installers.
- **Reproducible packaging:** explicit build profiles separating a full bundle (spaCy + CamemBERT libraries) from a lighter spaCy-only distribution.

This paper is a descriptive software report intended for arXiv and citation in digital humanities methods sections. It does not claim formal anonymity

---

<sup>1</sup><https://mshs.univ-cotedazur.fr/>

guarantees; researchers must still review outputs for indirect identifiers and contextual leaks.

## 2 Tool

### 2.1 Architecture

Text Data Anonymizer follows a two-process architecture (Figure 1). The *renderer* is an Electron<sup>2</sup> shell hosting a React interface built with Vite. The *NER service* is a long-lived Python process exposing a line-oriented JSON protocol over standard input/output. The Electron main process spawns the service at startup, forwards detection requests from the UI, and handles file-system operations (folder loading, live export of batch artifacts).

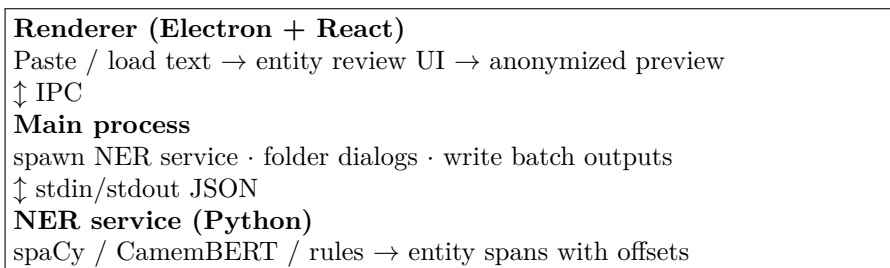


Figure 1: High-level architecture. All NLP inference runs in the local Python subprocess; the renderer never calls cloud APIs.

In *development mode*, the main process launches `scripts/ner.py` with the project virtual environment. In *released builds*, a PyInstaller onedir bundle (`ner-service`) is placed in application resources; end users do not install Python or spaCy models separately. Installers are produced with `electron-builder` (DMG/ZIP on macOS, NSIS/ZIP on Windows, AppImage/DEB on Linux). A GitHub Actions workflow builds full standalone artifacts on `macos-latest`, `windows-latest`, and `ubuntu-latest`.

### 2.2 NER backends and entity categories

The NER service supports three model backends selectable from the UI:

- **spaCy small** (`fr_core_news_sm`): faster, lower memory.
- **spaCy large** (`fr_core_news_lg`): default; richer annotations.
- **CamemBERT NER** (`Jean-Baptiste/camembert-ner`): transformer pipeline with generally higher recall on person and location spans in informal French, at higher compute and bundle size.

---

<sup>2</sup><https://www.electronjs.org/>

Model labels are mapped to a unified application schema: **person**, **location**, **organization**, **misc**, and **date** (spaCy). Complementary **rule-based detectors** identify email addresses, URLs, phone numbers, and date expressions (including French month names), which are merged with model predictions; overlapping spans are resolved with rule spans taking precedence where configured.

A post-processing step **splits entity spans at newline boundaries** so that paragraph breaks are never absorbed into a single replacement—a practical issue we observed when spaCy grouped tokens across blank lines in interview transcripts.

## 2.3 Replacement policy

Anonymization uses **stable category placeholders** rather than synthetic surface forms. Each unique value within a category receives a consistent tag for the document (e.g. [PERSON\_1], [LOCATION\_2]). Replacements are applied by character offset on the original string, not by global find-and-replace, which preserves unrelated token collisions.

The UI exposes two levels of control:

1. **Category toggles** — enable or disable replacement for entire classes (people, locations, ...).
2. **Per-entity-value toggles** — clicking a chip in the category panel disables all occurrences of that value while leaving other entities in the category active.

Researchers may also **manually add or remove spans** in the highlighted view (e.g. to mark a nickname missed by NER or delete a false positive).

## 2.4 Exports and interoperability

Beyond on-screen preview, the tool generates:

- **Anonymized text** (\*-anonymized.txt).
- **Audit report** (\*-report.md) with document summary, per-category statistics, and exact value→placeholder mappings.
- **Label Studio JSON** (\*-label-studio.json) with predictions for span labeling, plus a shared XML labeling config.

Command-line utilities in the repository support batch anonymization from Label Studio exports and folder-scale processing for headless workflows; the desktop application is the primary interactive path developed for MSHS Sud-Est researchers.

## 3 Workflow

### 3.1 Single-document review

The default workflow proceeds in four stages mirrored in the interface layout:

1. **Source text** — paste content or edit loaded text directly.
2. **Category review** — run NER, inspect detected categories, toggle replacement policies, and click entity chips to include or exclude specific values (occurrence counts are shown per value).
3. **Highlighted entities** — read the source with color-coded spans; add spans by selection or remove spans by click.
4. **Anonymized preview** — live rendering of placeholder substitutions restricted to active categories and entity values.

An audit report modal and clipboard/download actions support ethics documentation. Optional export to Label Studio creates a pre-annotated task for teams that refine spans collaboratively before final anonymization.

### 3.2 Batch folder mode

For multi-document projects, **batch mode** loads a directory of `.txt/.text` files (prior output artifacts are filtered automatically). Each file is opened in the same review UI. Navigation controls (*previous/next file*) preserve per-file entity states, selected categories, and manual edits in session memory.

When **auto-run default model** is enabled, NER executes automatically on each newly opened file that has not yet been processed, using the selected backend (spaCy large by default).

Critically for archival workflows, batch mode **writes outputs live** to the source folder as the researcher works: anonymized text, audit report, and Label Studio JSON are updated on change (debounced), so partial progress survives interruption and can be version-controlled alongside originals.

### 3.3 Operational notes

The first NER invocation after launch may take tens of seconds while models load; subsequent requests reuse the warm service. CamemBERT model *weights* (~400 MB) are downloaded from Hugging Face on first use in full builds unless already cached; spaCy pipelines are bundled in standalone installers. Researchers should treat audit reports as sensitive documents because they quote source strings selected for replacement.

## 4 Evaluation Sketch

We report an illustrative evaluation rather than a benchmark with gold-standard adjudication, which remains future work with ethics-approved corpus releases.

### 4.1 Materials

We used French interview-style excerpts representative of MSHS Sud-Est projects: semi-structured interviews mentioning persons, institutions, geographic references, dates, and domain-specific entities (e.g. certification bodies, experimental sites). Internal test sets include multi-paragraph transcripts with orthographic variation and elided speech typical of oral history transcriptions.

### 4.2 Backend comparison (qualitative)

On the same documents, we compared spaCy small, spaCy large, and CamemBERT:

- **spaCy small** offers the fastest turnaround and smallest memory footprint, with occasional missed multi-token organization names.
- **spaCy large** improves coverage of nested entities and is the recommended default for interactive review.
- **CamemBERT** tends to propose more person and location spans in conversational French; it may over-segment or label misc entities differently, motivating the interactive correction UI rather than fully automatic anonymization.

Rule detectors consistently captured structured identifiers (emails, URLs, phone patterns) that models sometimes split or skip.

### 4.3 Workflow metrics

For batch sessions, we recorded:

- time-to-first-preview (including model warm-up),
- number of manual span additions/removals per 1,000 characters,
- number of per-entity-value toggles (researcher overrides),
- output parity checks ensuring paragraph boundaries are preserved after newline-aware span splitting.

In internal trials, manual corrections concentrated on `misc` labels and rare toponyms; category-level toggles reduced repetitive clicking when entire classes were out of scope for a given ethics amendment.

## 4.4 Limitations and planned work

The tool does not detect indirect identification (unique life stories, kinship graphs, profession + city combinations) and does not perform coreference beyond what each NER model implicitly provides. We plan:

- a structured user study with MSHS Sud-Est partner laboratories,
- adjudicated annotation of a small public French qualitative sample,
- optional pseudonymization strategies beyond placeholders,
- packaging profiles that pre-download CamemBERT weights for fully offline first launch.

## 5 Availability

**Software.** Source code, issue tracker, and citation metadata: <https://github.com/xiaoouwang/anonymizer>

**Releases.** Standalone binaries (macOS DMG/ZIP for Apple Silicon and Intel, Windows installer, Linux AppImage/DEB) are distributed via GitHub Releases. Build instructions support full (`npm run build:ner:full`) and spaCy-only (`npm run build:ner`) NER bundles; metadata in `python-dist/ner-service/.bundle-m` records whether CamemBERT libraries are included.

**Citation.** Please cite this report and the software version used, e.g.:

Wang, X. (2026). *Text Data Anonymizer* (Version 0.1.0) [Computer software]. Maison des Sciences de l’Homme Sud-Est, Université Côte d’Azur. <https://github.com/xiaoouwang/anonymizer>

BibTeX key: `wang2026textdataanonymizer`. A `CITATION.cff` file is provided for GitHub’s citation widget.

**License and ethics.** The application is a research assistant; deployers remain responsible for compliance with GDPR, institutional review boards, and participant consent. Contact: `xiaoou.wang@univ-cotedazur.fr`.

## Acknowledgments

Developed at the Maison des Sciences de l’Homme Sud-Est (Université Côte d’Azur) in support of digital humanities training and qualitative data management. We thank partner research teams for feedback on batch workflows and audit reporting.

## References

- [1] Bernice S Elger and Arthur L Caplan. Broad consent for health research on biospecimens: A workshop report. *Journal of Empirical Research on Human Research Ethics*, 2014. Illustrative reference on research ethics context.
- [2] Matthew Honnibal, Ines Montani, Sofie Van Landeghem, and Adriane Boyd. spaCy: Industrial-strength natural language processing in python. In *Proceedings of the Python in Science Conference*, 2020.
- [3] Louis Lejeune. Jean-Baptiste/camembert-ner. Hugging Face model hub, 2020.
- [4] Louis Martin, Benjamin Muller, Pedro Javier Ortiz Suárez, et al. CamemBERT: a tasty French language model. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics: Student Research Workshop*, 2020.
- [5] Maxim Tkachenko et al. Label Studio: Data labeling software for machine learning. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, 2020.