

Selection flow for the verified base

Original search execution: main flow downward; exclusions branch right

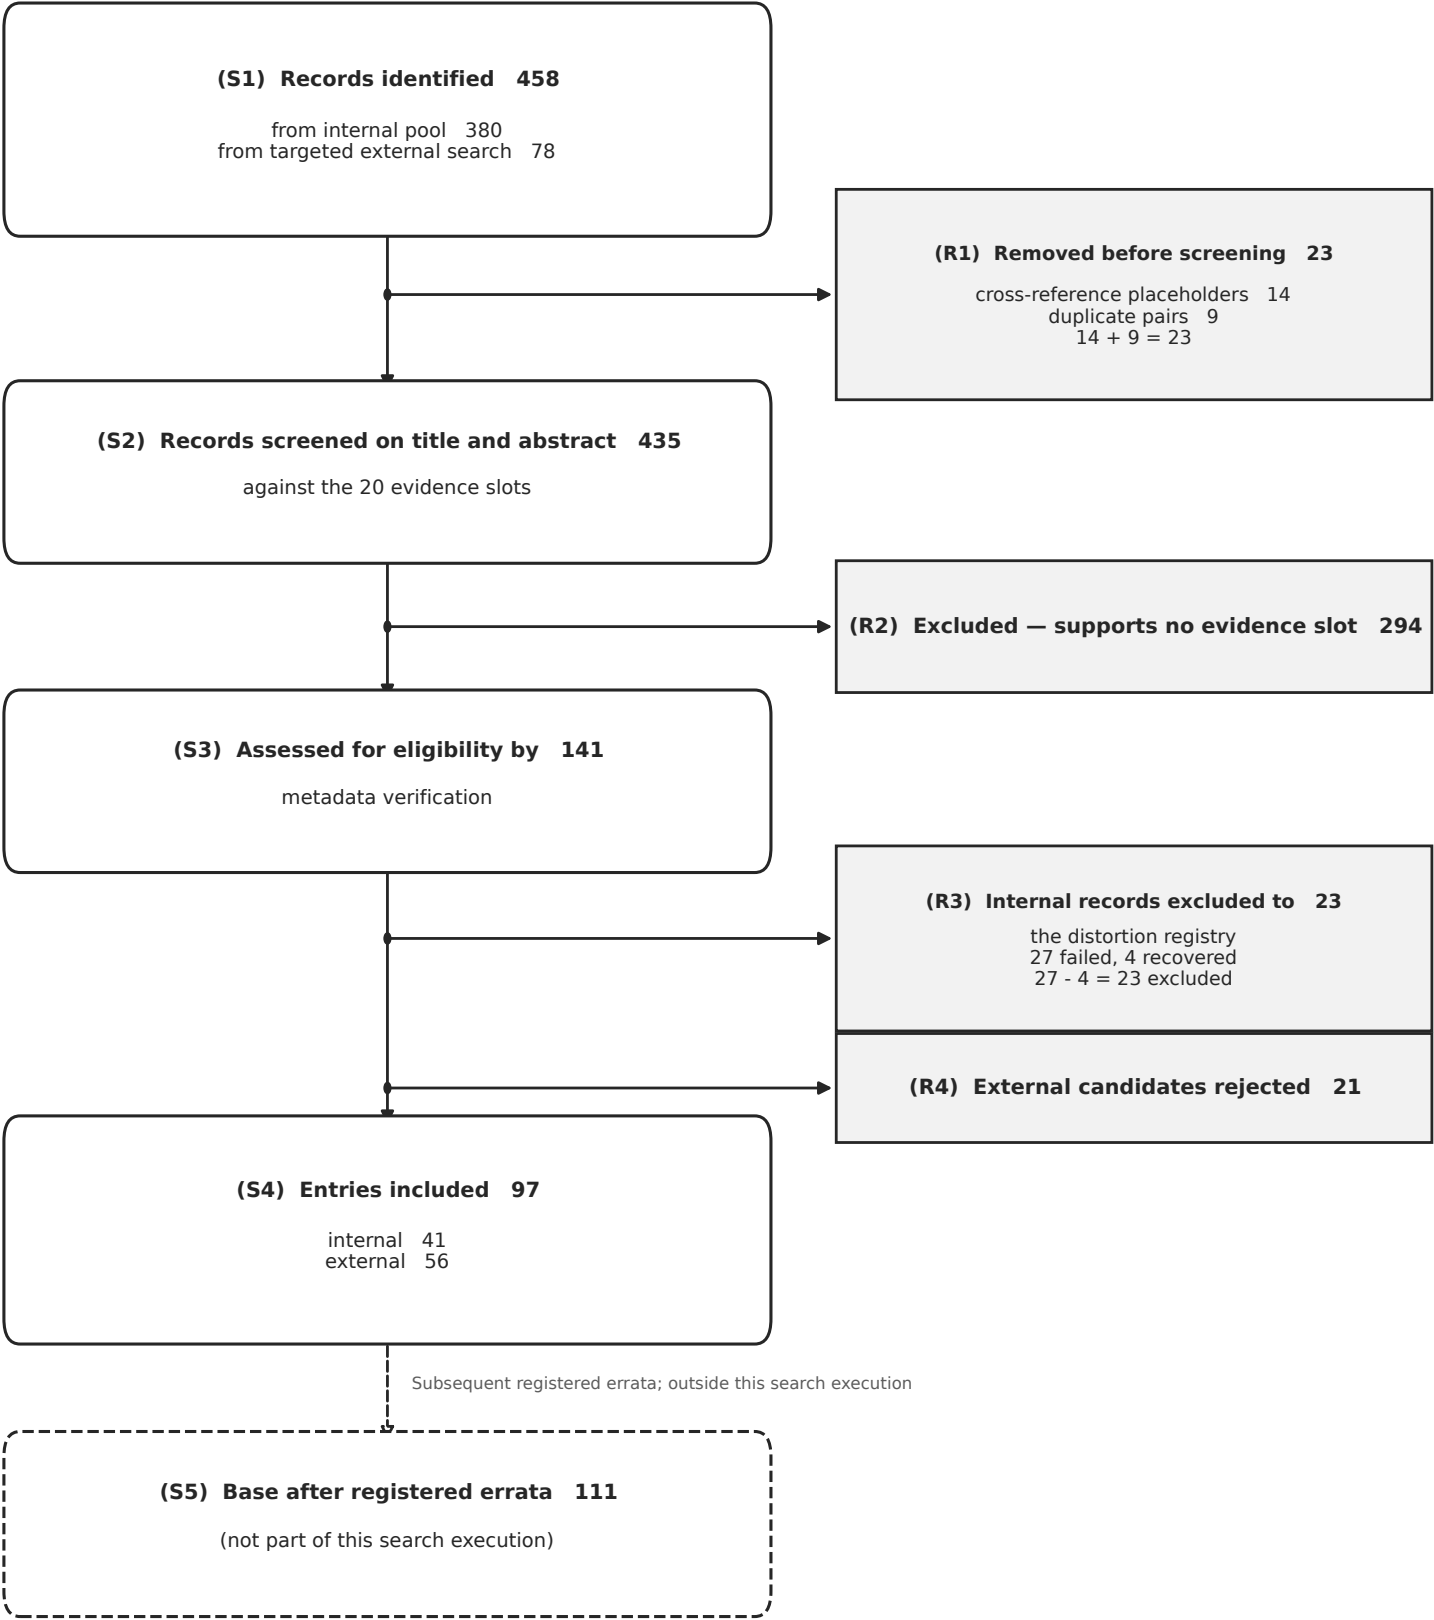


Figure C1. Selection flow for the verified base. The flow closes: $458 - 23 = 435$; $435 - 294 - 23 - 21 = 97$.

Counting conventions. Three figures describe the same underlying finding and are not three measurements of one quantity; each answers a differently posed question and only one is a box in this diagram.

COUNTING CONVENTIONS — CAPTION, NOT ADDITIONAL FLOW STAGES

(i) REGISTRATION — NOT A BOX

24 unique entries. The distortion registry's individually identifiable rows. This is the figure the paper reports, and it is not a box in this diagram.

(ii) SCREENING — THIS IS BOX R3

23 excluded of 27 failures. Metadata verification failed on 27 internal records; 4 were traced to a real record, corrected and retained, leaving 23 excluded. This is box R3. The four are not added back at the end, because they were never removed. $27 - 4 = 23$.

(iii) SPOT-CHECK — NOT A BOX

23 distorted of 41 examined. Of 41 English-language entries examined closely, 17 carried identifiers resolving to unrelated papers and 6 carried identifiers that do not exist. This is a rate over a defined subset, not a pool-wide rate, and it is not a box in this diagram. $17 + 6 = 23$.

Arithmetic coincidence only: (ii) $27 - 4 = 23$ and (iii) $17 + 6 = 23$ are different sets; R1's 23 is $14 + 9$, a third unrelated quantity.