

Domain-Aware Probability Sampling for Hybrid Quantum Systems using Bayesian Optimization

Nicholas S. DiBrita, Jason Han
Rice University
Houston, TX, USA

Krishna Bhatia
Fractal Analytics
Mumbai, MH, India

Younghyun Cho
Santa Clara University
Santa Clara, CA, USA

Hengrui Luo, Tirthak Patel
Rice University
Houston, TX, USA

Abstract—We study the problem of *probability distribution matching and sampling* on near-term quantum computers, aiming to construct parameterized circuits that generate samples from a target distribution while minimizing resource overhead. This task arises naturally in hybrid quantum–classical workflows, where measurement-driven objectives replace full state reconstruction, and is central to applications in generative modeling and variational inference. However, it remains challenging due to hardware noise, limited circuit depth, and a high-dimensional, non-convex parameter space.

We propose CircuitTree, a surrogate-guided optimization framework based on Bayesian Optimization with tree-based models for scalable, domain-aware distribution matching. Our approach introduces a structured, layerwise decomposition aligned with the variational circuit architecture, enabling distributed and sample-efficient optimization within hybrid loops with theoretical convergence guarantees. Across representative distribution-matching tasks, CircuitTree achieves up to $2\text{-}3\times$ lower total variation distance while using $40\text{-}60\%$ fewer gates than prior approaches. These results demonstrate its effectiveness as a practical building block for end-to-end hybrid quantum sampling.

I. INTRODUCTION

Probability distribution matching and sampling is a core problem in quantum algorithm design, where the goal is to construct a low-depth, parameterized quantum circuit that reproduces the output distribution (measurement statistics) of a target process while minimizing resource overhead [1], [2], [3], [4], [5]. This task is especially critical in the context of near-term quantum hardware, which is constrained by short coherence times, limited gate fidelity, and strict circuit depth limits [6], [7]. Existing approaches often rely on domain-specific heuristics or gradient-based techniques [8], [9], [10] that either do not scale to high-dimensional parameter spaces or assume access to analytic gradients, which may not exist for circuits evaluated through noisy quantum measurements [11]. We therefore study distribution matching as a black-box optimization problem over a non-smooth, high-dimensional objective: the discrepancy between the output statistics of a parameterized circuit and a target distribution.

A natural approach is Bayesian Optimization (BO), which optimizes expensive black-box functions by constructing surrogate models [12], [13], [14]. However, standard BO methods typically employ Gaussian Process (GP) surrogates, which scale poorly and require smoothness assumptions that do not hold in quantum optimization problems [15]. In addition, GPs do not naturally capture the bounded distributions arising from

quantum measurements and often oversmooth the non-smooth loss landscape. To address this, we propose CircuitTree¹, a surrogate-guided framework for domain-aware distribution matching based on tree-based models following the spirit of [16], specifically gradient-boosted regression trees (GBRTs), which are better suited for the high-dimensional and non-smooth optimization landscape induced by quantum circuit outputs [17], [18]. CircuitTree targets distribution matching based on output statistics, which is fundamental to tasks where measurement statistics, not full quantum amplitudes, determine success. These are precisely the near-term workloads limited by measurement access and noise [1], [2], [3]; our goal is to enable distributional alignment for sampling- and measurement-driven hybrid quantum–classical workflows, rather than general-purpose, tomographic unitary, or state synthesis.

We specifically show that these general-purpose methods are inefficient for our targeted domain. Beyond the surrogate choice, we introduce a structured decomposition of the parameter space that leverages the layered architecture of variational circuits [19]. This layerwise decomposition yields a principled form of block-coordinate optimization: parameters within each layer are optimized in localized subspaces, while synchronization across layers ensures global convergence. This structure enables distributed, sample-efficient optimization and improves stability relative to random partitioning. We formalize the surrogate-guided distribution matching problem and provide theoretical guarantees under mild assumptions on the noise’s stochasticity and the model’s fidelity.

Summary of this work’s contributions:

- We formulate domain-aware probability distribution matching as a black-box optimization problem with structured parameter spaces and identify the challenges of BO.
- We propose a surrogate-guided framework, CircuitTree, that leverages GBRT surrogates and a scalable, distributed subspace-optimization strategy based on circuit structure.
- We provide convergence guarantees and analyze the impact of surrogate model fidelity and parameter decomposition on optimization performance for practical guidance.
- We empirically validate the framework on widely-used quantum benchmarks, showing that our method achieves

¹This work is published at the IEEE International Conference on Quantum Computing and Engineering (QCE), 2026.

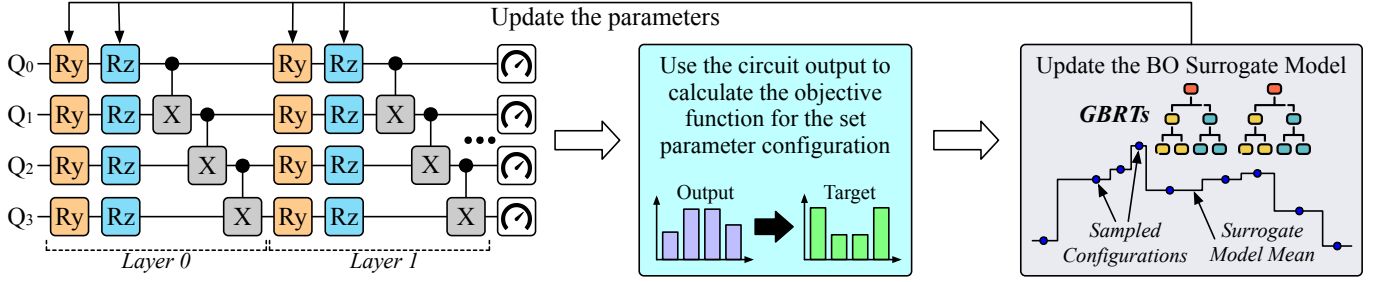


Fig. 1: For CircuitTree, we use BO with tree-based surrogates to update layered circuit parameters for probability distribution matching. We use a hardware-efficient ansatz to mitigate the effects of hardware noise.

up to **2-3× lower total variation distance** while using **40-60% fewer gates** than prior approaches.

- CircuitTree’s code and dataset are open-sourced at: <https://github.com/positivetechologylab/CircuitTree>.

II. PROBLEM SETUP

Let $\Theta = [0, 2\pi)^d$ denote the parameter space of an n -qubit parameterized quantum circuit $C(\theta)$ with d parameterized gates, constructed from a fixed ansatz composed of L layers of parameterized gates. Given an input state $|\psi_0\rangle$, the circuit induces an output probability distribution p_θ over measurement outcomes in the computational basis.

Our goal is to match a target probability distribution p^* by optimizing the circuit parameters θ . The target distribution may arise from classical computation (e.g., analytic or data-driven distributions), prior quantum measurements, or domain-specific processes, depending on the application. This naturally leads to the following black-box optimization problem:

Definition II.1 (Distribution Matching Objective).

$$\theta^* = \arg \min_{\theta \in \Theta} \mathcal{L}(p_\theta, p^*),$$

where $\mathcal{L}$ measures the discrepancy between the generated distribution p_θ and the target distribution p^* .

We adopt the total variation distance (TVD) [20], [21], [22] as the loss function, defined as the ℓ_1 distance between probability vectors:

$$\mathcal{L}(p_\theta, p^*) := \text{TVD}(p_\theta, p^*) = \frac{1}{2} \sum_{x \in \{0,1\}^n} |p_\theta(x) - p^*(x)|.$$

Each query to $\mathcal{L}$ is stochastic, as it is estimated from a finite number of measurements (shots). Our implementation utilizes sample-based estimates of TVD from limited measurement shots, which ensure consistent convergence and avoid exponential costs, which would otherwise be incurred with full state tomography-based distances. Moreover, the objective is non-convex, non-differentiable, and highly non-smooth in general: small changes in θ may propagate across layers and produce abrupt changes in output statistics [6]. This motivates the development of surrogate models that can handle stochastic, discontinuous responses.

Remark II.2. Unlike variational quantum algorithms, which optimize smooth cost functions derived from Hermitian observ-

ables, our objective arises directly from output distributions and is inherently non-smooth. This motivates the use of black-box optimization methods that do not rely on gradient information or smoothness [14], [23], [24], and in particular surrogate models such as regression trees that naturally accommodate non-smoothness.

To optimize this objective, we employ surrogate modeling. Let $f(\theta) := \mathcal{L}(p_\theta, p^*)$ denote the true cost. The surrogate $\hat{f}_t$ is a learned approximation trained on observed evaluations:

$$\mathcal{D}_t = \{(\theta_i, y_i)\}_{i=1}^t, \quad y_i = f(\theta_i) + \xi_i$$

where ξ_i captures stochastic noise from measurement uncertainty or finite sampling. Evaluations on hardware may also include additional stochastic noise due to device imperfections such as thermal relaxation or depolarization [17], [25].

Definition II.3 (Surrogate-Guided Optimization). At each round t , the optimizer fits $\hat{f}_t$ on $\mathcal{D}_t$ and selects the next query point via an acquisition function $\alpha_t : \Theta \rightarrow \mathbb{R}$:

$$\theta_{t+1} = \arg \max_{\theta \in \Theta} \alpha_t(\theta; \hat{f}_t).$$

The acquisition function balances exploration and exploitation; common examples include Expected Improvement (EI) and Upper Confidence Bound (UCB) [12], [14]. The goal is to minimize $f(\theta)$ with as few queries as possible, yielding a shallow circuit that approximates the target distribution.

Remark II.4. This problem departs from classical BO in key ways: (1) the function f is distributional and highly non-smooth; (2) the parameter space Θ is structured by circuit layers and is only partially separable; and (3) the objective is defined relative to a fixed input state $|\psi_0\rangle$. These distinctions motivate both our surrogate choice (GBRT) and our structured layerwise optimization strategy.

III. CIRCUITTREE’S OPTIMIZATION ALGORITHM

The core idea of our approach is to learn a surrogate model that approximates the true probability-matching loss $f(\theta) := \text{TVD}(p_\theta, p^*)$ and to use this surrogate to guide parameter updates (Fig. 1). Standard BO techniques often use Gaussian Process (GP) surrogates; however, GP-based models scale cubically with the number of observations, making them impractical in high-sample regimes [26], [27]. While GPs can be competitive for small datasets, they are also ill-suited

for the highly non-smooth objectives that arise in probability distribution matching, such as minimizing TVD [28].

Instead, we employ Gradient Boosted Regression Trees (GBRTs), an ensemble of tree-based learners that capture sharp discontinuities [23], [29] and perform well with limited data and at large scales, such as in quantum computing [30]. Using an ensemble rather than a single tree also enables the quantification of uncertainty needed for acquisition functions. Compared to other tree-based methods, GBRTs also allow us to demonstrate theoretical convergence and empirical outperformance, as discussed further in this section and Sec. VII.

Definition III.1 (Surrogate Model). A surrogate model $\hat{f}_t : \Theta \rightarrow \mathbb{R}$ is a regression function trained to approximate f using dataset $\mathcal{D}_t$. In our framework, $\hat{f}_t$ is a GBRT model composed of M decision trees, each trained sequentially on residuals of the previous stage.

At each boosting step, a regression tree $h_t(\theta)$ is fit to the negative gradient of the loss $\mathcal{L}$ evaluated at the current prediction $\hat{f}_{t-1}$:

$$h_t = \arg \min_h \sum_{i=1}^{t-1} \left[-\frac{\partial \mathcal{L}(y_i, \hat{f}_{t-1}(\theta_i))}{\partial \hat{f}_{t-1}(\theta_i)} \right] h(\theta_i).$$

The surrogate is updated by adding a scaled version of h_t :

$$\hat{f}_t(\theta) = \hat{f}_{t-1}(\theta) + \nu \cdot h_t(\theta),$$

where ν is the learning rate controlling the contribution of each tree.

A. Acquisition Function and Optimization Strategy

At each iteration t , the next query θ_{t+1} is chosen by maximizing an acquisition function $\alpha_t : \Theta \rightarrow \mathbb{R}$ derived from the surrogate. We use the *expected improvement* (EI) criterion:

$$\alpha_t(\theta) = \mathbb{E}[\max(f_t^* - \hat{f}_t(\theta), 0)],$$

where $f_t^* = \min_{i \leq t} y_i$ is the best observed value. In GBRTs, this expectation is approximated by quantile regression over ensemble predictions.

Remark III.2. Unlike GPs, GBRTs do not natively provide posterior distributions. In CircuitTree, we estimate uncertainty by combining (i) quantile-based predictions and (ii) diversity across tree paths in the ensemble, following the approach of [16], [31]. This empirical posterior enables our use of the EI or UCB-style acquisition functions.

B. Layerwise Parameter Decomposition

The parameter vector θ is structured by circuit layers: each layer $\ell = 1, \dots, L$ contains a subset $\theta^{(\ell)}$. To exploit this structure, we introduce a distributed optimization strategy that partitions Θ into disjoint subspaces optimized independently, while others are fixed. To reduce the dimensionality of the search space, we explored splitting the parameter vector into subspaces and alternating optimization across them. At each iteration, one subspace is optimized while the others are held fixed, ensuring all parameters are eventually tuned. We refer to this process as *subspace splitting*. A naive approach is to form

subspaces by randomly grouping parameters. For the layered ansatz used in CircuitTree, however, splitting by layers is more natural: each subspace corresponds to the parameters of one circuit layer. This improves interpretability, since subspaces align directly with the circuit's gate execution order.

C. Distributed Subspace Splitting

While alternating subspaces improves trainability, we observed that the per-iteration progress within subspaces exceeded that of full-space optimization. To exploit this effect further, we developed a *distributed subspace* method: each subspace is assigned to a separate thread, which trains its own surrogate and optimizes concurrently. After an initial warm-up over the full parameter space, each thread runs for a fixed number of iterations in its assigned subspace. Whenever a thread improves, it updates a shared global parameter vector, which is then synchronized across all threads. This scheme is illustrated in Fig. 2. This distributed approach combines the benefits of subspace optimization with global consistency.

Definition III.3 (Layerwise Decomposition). Let $\Theta = \Theta^{(1)} \times \Theta^{(2)} \times \dots \times \Theta^{(L)}$. For each layer ℓ , a local surrogate $\hat{f}_t^{(\ell)}$ is trained on $\mathcal{D}_t$ restricted to $\Theta^{(\ell)}$.

This yields a principled block coordinate optimization: (1) each surrogate operates in reduced dimensionality, improving sample efficiency; (2) layers can be optimized in parallel; and (3) barren plateaus are mitigated by restricting updates to local subspaces [19].

Algorithm 1 SURROGATEMATCH($p^*, \mathcal{A}$)

- 1: Initialize $\theta_0 \sim \text{Unif}(\Theta)$
 - 2: Evaluate $y_0 = \text{TVD}(p(\theta_0), p^*)$
 - 3: Initialize dataset $\mathcal{D}_0 = (\theta_0, y_0)$
 - 4: **for** $t = 1$ to T **do**
 - 5: Train GBRT surrogate $\hat{f}_t$ on $\mathcal{D}_{t-1}$
 - 6: **for** each layer $\ell = 1, \dots, L$ **in parallel do**
 - 7: Fix all $\theta^{(j)}$ for $j \neq \ell$
 - 8: Optimize $\alpha_t^{(\ell)}$ to get $\theta_t^{(\ell)}$
 - 9: Evaluate $y_t^{(\ell)} = \text{TVD}(p(\theta_t^{(\ell)}), p^*)$
 - 10: Update $\mathcal{D}_t \leftarrow \mathcal{D}_{t-1} \cup (\theta_t, y_t^{(\ell)})$
 - 11: **end for**
 - 12: Synchronize θ_t across layers
 - 13: **end for**
 - 14: **return** $\theta_{\text{best}} = \arg \min_{(\theta, y) \in \mathcal{D}_T} y$
-

D. Distributed Surrogate-Guided Optimization

Our full algorithm is presented in Algorithm 1. Each layer is optimized in parallel with periodic synchronization to ensure a globally consistent parameter set.

Remark III.4. Layerwise decomposition with distributed surrogates improves sample efficiency, provides stability relative to random partitioning, and preserves convergence guarantees under mild assumptions. In addition, distribution matching only requires access to target output statistics in some applications

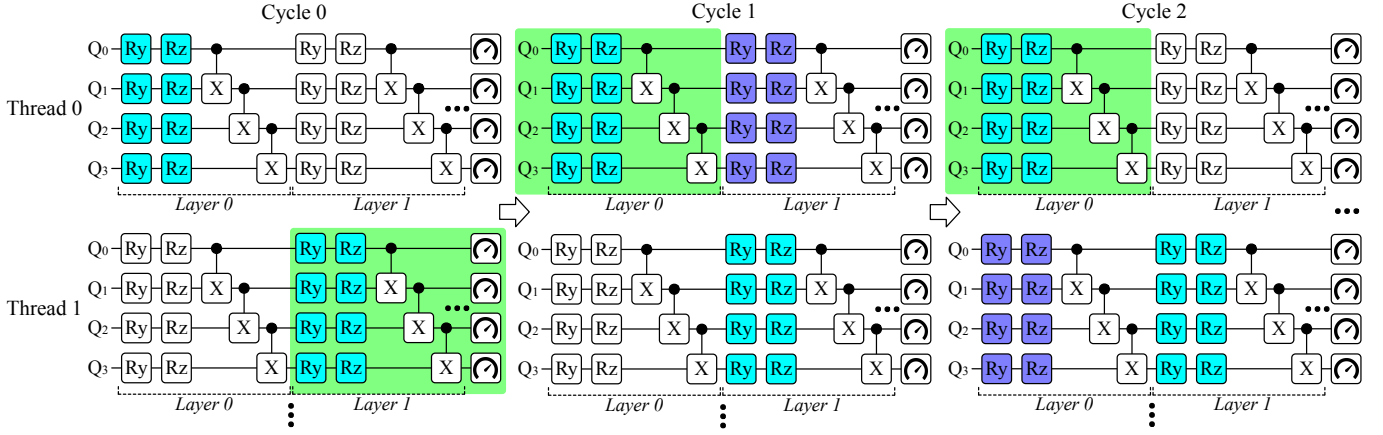


Fig. 2: Distributed subspace splitting: each thread optimizes one layer (blue). Improvements over the prior cycle (green) are propagated to the global parameter vector (purple) used by all threads.

(e.g., VQE); in others, such as classical data-driven sampling or generative tasks, the target distribution is directly available. When target statistics are required, their cost can be amortized across repeated sampling, making the approach practical in near-term hybrid quantum workflows.

IV. THEORETICAL ANALYSIS

We now provide theoretical guarantees of convergence for CircuitTree, our surrogate-guided approximate probability distribution-matching procedure. Our theoretical analysis builds upon standard proofs of Bayesian optimization convergence, with the novelty lying in adapting and proving these guarantees for non-Gaussian, tree-based surrogates under structured quantum parameter spaces, which, to our knowledge, is the first result of its kind. Below we present a condensed analysis; full details are given in Appendix A. We begin with assumptions on the cost function and surrogate model class.

Assumption IV.1 (Lipschitz Continuity). The true loss $f : \Theta \rightarrow \mathbb{R}$ is L -Lipschitz w.r.t. the ℓ_2 norm:

$$|f(\theta) - f(\theta')| \leq L \|\theta - \theta'\|_2 \quad \forall \theta, \theta' \in \Theta.$$

Assumption IV.2 (Bounded, Centered Noise). At step $t \geq 1$ the algorithm queries θ_t and observes

$$y_t = f(\theta_t) + \xi_t, \quad \mathbb{E}[\xi_t] = 0, \quad |\xi_t| \leq \sigma \text{ a.s.}$$

Assumption IV.3 (Variance Floor at Unexplored Points). For any unobserved $\hat{\theta} \notin \{\theta_i\}_{i=1}^t$, at least one tree assigns $\hat{\theta}$ to an empty leaf determined by covariate splits. The ensemble predictive variance at $\hat{\theta}$ is bounded away from zero.

Remark IV.4. Assumption IV.1 is standard in BO analyses [14]; although f is globally non-smooth, local Lipschitzness suffices for regret bounds. Assumption IV.2 is a simplification: while hardware noise is not strictly bounded, it is well-approximated by sub-Gaussian distributions with bounded variance due to error mitigation [32], [17], [33]. Assumption IV.3 follows prior tree-based BO work [23], [16], ensuring unexplored regions remain attractive under UCB/El.

To establish convergence, we first need to guarantee that unexplored regions do not collapse to zero variance under the surrogate.

Lemma IV.5 (Predictive Variance at Unexplored Points). Suppose $\hat{\theta}$ has never been queried up to round t . Then the ensemble variance satisfies

$$s_t^2(\hat{\theta}) \geq \eta,$$

where $\eta > 0$ depends only on past evaluations and the shrinkage parameter ν .

Since unexplored regions remain attractive, the optimizer continues to spread queries throughout Θ . We formalize this with the covering radius.

Definition IV.6 (Covering Radius). The covering radius after t rounds is $\rho_t := \sup_{\theta \in \Theta} \min_{1 \leq i \leq t} \|\theta - \theta_i\|_2$, the maximum distance from any $\theta \in \Theta$ to its nearest sampled point.

As the covering radius shrinks, every region of Θ is eventually explored. Combining this with Lipschitz continuity gives a guarantee for the *incumbent* (best observed point), which is the standard output of Bayesian optimization.

Definition IV.7 (Incumbent). Define the incumbent (best observed query) at round t as

$$\hat{\theta}_t \in \arg \min_{1 \leq i \leq t} y_i.$$

Theorem IV.8 (Convergence under Layered Distributed Optimization). Under Assumptions IV.1–IV.3, the incumbent $\hat{\theta}_t$ produced by SURROGATEMATCH (Algorithm 1) satisfies, for all $t \geq 1$,

$$f(\hat{\theta}_t) \leq f^* + L\rho_t + 2\sigma \quad \text{a.s.},$$

where $f^* = \inf_{\theta \in \Theta} f(\theta)$. Consequently,

$$\limsup_{t \rightarrow \infty} \mathbb{E}[f(\hat{\theta}_t)] \leq f^* + 2\sigma.$$

If $\sigma = 0$ and $\rho_t \rightarrow 0$, then

$$\lim_{t \rightarrow \infty} f(\hat{\theta}_t) = f^* \quad \text{and hence} \quad \lim_{t \rightarrow \infty} \mathbb{E}[f(\hat{\theta}_t)] = f^*.$$

TABLE I: List of software libraries used for the implementation and evaluation of CircuitTree.

Software	Version	Software	Version
python	3.12.3	scikit-optimize	0.10.2
bqskit	1.1.2	qiskit-aer	0.14.2
qiskit	1.1.0	qiskit-ibm-runtime	0.25.0
SALib	1.5.0	scikit-learn	1.5.0

Remark IV.9 (On rates). The bound above is stated in terms of the covering radius ρ_t . If, in addition, the query sequence is constructed (or augmented) to be space-filling so that $\rho_t \leq Ct^{-1/d}$ for some constant C (e.g., via an explicit low-discrepancy design or other covering guarantee), then in the noise-free case $\sigma = 0$,

$$\mathbb{E}[f(\hat{\theta}_t)] - f^* = \mathcal{O}(t^{-1/d}).$$

Without such an additional space-filling condition, the theorem requires only $\rho_t \rightarrow 0$.

V. DISCUSSION

Surrogate Fidelity. The accuracy of the surrogate model directly bounds the regret incurred at each iteration: lower surrogate error leads to tighter guarantees on expected improvement [14]. Gaussian Processes assume smoothness and offer closed-form uncertainty estimates [13], [28], which makes them effective in small-sample regimes but computationally prohibitive at scale due to cubic complexity in the number of evaluations [26], [27]. By contrast, tree-based surrogates such as GBRT [34], [35] are agnostic to continuity and scale linearly with the number of samples, making them well suited for the non-smooth landscapes encountered in distribution matching and sampling from quantum circuits. Our analysis highlights the importance of ensemble-based acquisition heuristics to compensate for the lack of analytic posteriors [31].

Structured Parameter Spaces. Quantum circuits often follow layered, modular architectures [8], which induce a block structure in the parameter space. Our layerwise decomposition exploits this structure by reducing dimensionality at each step and enabling distributed surrogates, yielding a principled form of block coordinate optimization with convergence guarantees (Theorem IV.8). This aligns with prior results in distributed and multi-fidelity BO [36], [37]. Empirically, the structured updates also mitigate barren plateaus by focusing optimization on local subspaces [19]. The mitigation arises not from altering gradient magnitudes but from restricting the optimization subspace through layerwise decomposition, which reduces parameter coupling/correlation and stabilizes optimization (explored empirically in Sec. VII).

Expressivity vs. Trainability. Highly expressive ansätze may require large parameter sets to approximate a target distribution [10], [19], but this increases dimensionality and degrades trainability. Layered decomposition offers a compromise: restricting updates to low-dimensional subspaces while preserving global convergence. This mirrors results in variational quantum learning [38], where expressivity often

trades off against trainability due to barren plateaus. Our results suggest that architectural priors, parameter tying, and regularization can further improve trainability without sacrificing fidelity, consistent with recent advances in ML-inspired compilation [39], [40].

Application Workflows and Hybrid Utility. The distribution matching formulation naturally aligns with end-to-end hybrid quantum-classical workflows, where the objective is defined at the level of measurement statistics rather than full quantum states. Many near-term applications, including variational cost estimation, generative modeling, and data-driven quantum pipelines, operate on sampled outputs, making distributional alignment the relevant objective [1], [2], [3]. Our approach enables direct integration into hybrid loops, where circuit parameters are iteratively refined based on measured discrepancies with respect to a target distribution.

Robustness and Noise-Aware Optimization. Because the objective is defined over sampled measurement outcomes, our framework inherently operates under stochastic noise arising from finite-shot estimation and hardware imperfections. The use of tree-based surrogates allows the optimizer to remain stable under such noise, without relying on smoothness assumptions or analytic gradients. This is particularly important for near-term devices, where noise and variability are unavoidable, and aligns with practical deployment scenarios in which optimization must proceed under realistic hardware constraints [5], [41].

VI. EXPERIMENTAL AND ANALYSIS METHODOLOGY

A. Experimental Testbed Setup

We run our synthesis experiments and classical processing tasks on our local computing cluster. The cluster consists of nodes with the AMD EPYC 7702P 64-core processor, x86_64 architecture, and a 2.0 GHz clock. We spawn virtual machines (VMs) on these nodes with 8 cores, 32 GB of memory, and 32 GB of storage for each of our experiments, providing more than sufficient resources. The VMs are resource-bounded and not overprovisioned, ensuring that each experiment has exclusive access to the hardware resources assigned to it without any interference, which helps us provide accurate and consistent timing analysis. We run all of our hardware experiments on the `ibm_nazca` quantum computer, a 127-qubit quantum computer with Eagle r3 architecture available via the IBM quantum cloud [42]. The computer has a median one-qubit gate error of 3.3×10^{-4} , a median two-qubit gate error of 1.2×10^{-2} , and a median measurement operation error of 2.3×10^{-2} . All circuits used in evaluation utilize four qubits.

B. Software Framework Implementation

Table I provides a list of all the software used for the implementation and evaluation of CircuitTree. All libraries and packages are Python-based. We use `scikit-optimize` [34] to perform BO, with models from the `scikit-learn` library [43] as surrogates. We use the `BQSKit` library to run the state-of-the-art competitive synthesis framework [44] as a baseline for comparison. `BQSKit` [44] serves as an

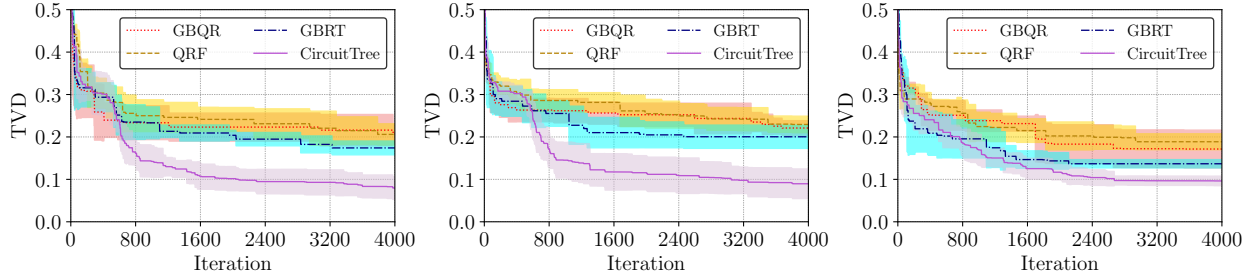


Fig. 3: TVD during optimization of 3 different RQCs, using GBRT, QRF, and GBQR. GBRT significantly outperforms both QRF and GBQR in terms of TVD and runtime. CircuitTree’s results with the final layered optimization design are shown.

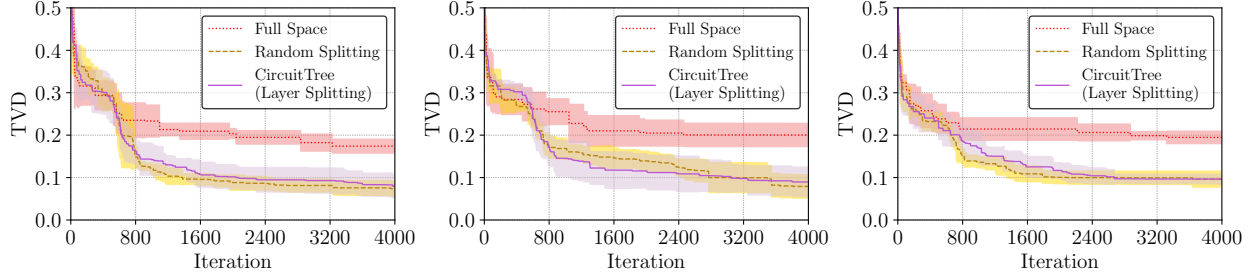


Fig. 4: TVD during optimization of 3 different RQCs, using GBRT. Convergence is compared across full-space optimization, random subspace splitting, and layered splitting. CircuitTree adopts layered splitting with distributed surrogate optimization.

appropriate baseline as it represents a state-of-the-art quantum circuit synthesis framework that optimizes circuits under realistic hardware constraints. Although designed for circuit-level synthesis, it provides a strong point of comparison for our setting by producing circuits that implicitly induce target output distributions, allowing us to evaluate how effectively surrogate-guided distribution matching can achieve similar or improved sampling fidelity with reduced depth and gate complexity.

We use the `qiskit` library [45] to create circuit instruction sets compatible with IBM quantum hardware, and `qiskit_aer` to simulate quantum circuits and estimate output distributions during optimization. Our evaluation circuits are taken directly or modified from QASMBench [46], a benchmark suite of near-term quantum circuits.

We use `qiskit_ibm_runtime` to interface with the IBM quantum cloud and execute circuits on the `ibm_nazca` quantum computer. When transpiling circuits, we use optimization level 0 to isolate the effect of our distribution matching approach from compiler-level optimizations. All experiments are run with 10,000 shots unless otherwise specified, and repeated five times to account for stochastic variability in both hardware and optimization.

We implement repeated layers of the ansatz shown in Fig. 1 for CircuitTree. The ansatz consists of parameterized Ry and Rz gates, followed by cascaded CX gates arranged in a linear topology. This structure enables the circuit to generate a rich family of output probability distributions while remaining hardware-compatible. The sparse connectivity reflects practical superconducting architectures, where dense connectivity introduces crosstalk and noise [47], [48], [49].

By constraining the ansatz to this structure, CircuitTree focuses on learning distributions that are realizable under hardware constraints, rather than exact circuit equivalence.

This avoids the need for SWAP insertion and reduces the noise footprint. Each layer defines a compositional transformation of the output distribution, and we typically use 3–4 layers, which empirically provide a strong balance between expressivity and trainability for distribution matching.

C. Relevant Analysis Metrics

Total Variation Distance (TVD). The TVD is a widely-used metric to measure the difference between two probability distributions [20], [21], [18], [22]. For a quantum system of n qubits with 2^n output states, the TVD between two probability distributions P_1 and P_2 over these 2^n states can be measured as $\text{TVD} = \frac{1}{2} \sum_{i=0}^{2^n-1} |p_1^i - p_2^i|$, where p_1^i is the probability of observing state i in distribution P_1 and p_2^i is the probability of observing state i in distribution P_2 . This metric is used both during optimization and evaluation to quantify how well the learned circuit reproduces a target distribution. Unlike fidelity-based state metrics, TVD directly captures discrepancies in measurement outcomes, making it more appropriate for hybrid quantum workflows where only sampled outputs are observable.

Synthesis Time. This is the overall time required to optimize circuit parameters for a given target distribution. It reflects the classical overhead of the hybrid optimization loop. **Circuit Depth.** This measures the critical path length of the circuit and serves as a proxy for runtime and decoherence exposure [50], [33], [46], [51]. **Number of Gates.** We measure the total number of two-qubit CX gates, as these dominate error rates in near-term hardware [52], [49], [17], [53]. Together, these metrics capture the tradeoff between fidelity and efficiency.

D. Algorithms Evaluated

We evaluate CircuitTree across a set of representative workloads that define target probability distributions under

different regimes relevant to near-term quantum applications.

Randomly-Generated Quantum Circuits (RQC). We use widely-used RQCs as a stress test for distribution matching, where the target distributions are induced by circuits with diverse and complex behaviors [54]. In our setting, they serve as domain-agnostic targets to evaluate robustness and generality.

Quantum State Preparation (QSP). Amplitude embedding circuits define target probability distributions derived from classical data encoded into quantum amplitudes [55], [56], [57]. We generate 10 such target distributions using `qiskit` state preparation routines [45], [58], and evaluate how well CircuitTree can approximate them using a constrained ansatz.

Variational Quantum Eigensolver (VQE). VQE defines target distributions implicitly through measurement statistics of parameterized quantum circuits that approximate ground states [59]. In our evaluation, these measurement distributions serve as targets for distribution matching, reflecting realistic hybrid workloads where objectives depend on sampled expectations.

VII. EVALUATION AND RESULTS


We aim to answer the following questions: **Q1** How do different surrogate models (GP vs. GBRT vs. Quantile Regression Forests (QRF)) compare in convergence speed, fidelity of distribution matching, and robustness? **Q2** What is the effect of layerwise distributed optimization on convergence time and stability? **Q3** How query-efficient is CircuitTree in terms of quantum hardware measurements (shots), and how does it scale with ansatz depth and circuit width? **Q4** How does CircuitTree compare with standard black-box optimizers under a fixed small budget of cost-function evaluations? **Q5** Can CircuitTree reliably prepare domain-relevant samples on hardware, including those used in QSP and VQE?

A. Surrogate Comparison (Q1)

We first compare surrogate models for probability distribution matching. The candidates include: (1) Gaussian Processes (GPBO) [60], [27], [26], which provide probabilistic predictions and analytic uncertainty estimates but scale cubically in sample size and assume smoothness; (2) Gradient Boosted Quantile Regression (GBQR) [35]; and (3) Quantile Regression Forests (QRF) [31], both of which augment tree ensembles with explicit quantile modeling. All surrogates are embedded in the same Bayesian Optimization loop with Expected Improvement as the acquisition strategy. **Results.** Across three 3-layer RQCs, GBRT achieved the fastest convergence and lowest TVD (Fig. 3). GPBO failed to finish within five days due to cubic scaling and the inability to capture sharp discontinuities. QRF and GBQR provided quantile-based uncertainty but introduced runtime overhead without improving fidelity. GBRT reached $\text{TVD} \leq 0.2$ with fewer evaluations and more than $2\times$ faster convergence, demonstrating robustness to non-smooth loss landscapes and practical suitability for near-term workloads.

B. Layerwise Distributed Optimization (Q2)

We next evaluate structured optimization strategies: (1) global surrogates trained over the full parameter space, (2)

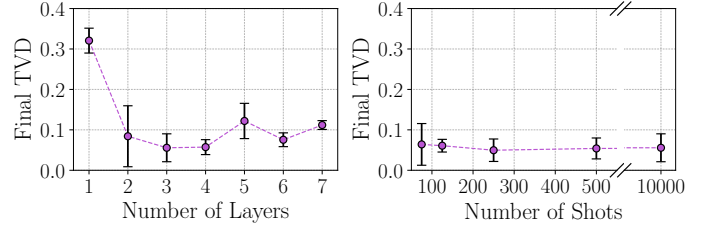

(a) Impact of Num. Layers on TVD (b) Impact of Num. Shots on TVD

Fig. 5: Analyzing the impact of (a) the number of ansatz layers and (b) the number of measurement shots on the performance of CircuitTree using VQE tasks.

TABLE II: Reduced-budget simulator baselines under a fixed budget of 60 TVD objective evaluations. Each entry reports the mean $\pm$ standard deviation over 10 seeds.

Task	CircuitTree		GPBO	
	TVD	Time (s)	TVD	Time (s)
VQE	0.40 $\pm$ 0.05	24.8 $\pm$ 1.7	0.41 $\pm$ 0.09	114 $\pm$ 32.9
RQC0	0.33 $\pm$ 0.07	24.1 $\pm$ 1.2	0.35 $\pm$ 0.07	109 $\pm$ 38.8
RQC1	0.31 $\pm$ 0.05	27.1 $\pm$ 2.3	0.33 $\pm$ 0.05	76.6 $\pm$ 9.5
RQC2	0.29 $\pm$ 0.03	24.2 $\pm$ 1.3	0.32 $\pm$ 0.03	76.0 $\pm$ 16.6
QSP0	0.17 $\pm$ 0.03	17.7 $\pm$ 0.2	0.20 $\pm$ 0.02	71.9 $\pm$ 10.5
QSP1	0.23 $\pm$ 0.03	16.8 $\pm$ 0.6	0.24 $\pm$ 0.02	69.6 $\pm$ 12.0

random subspace updates, and (3) our *layerwise distributed optimization*, which assigns each circuit layer an independent surrogate updated in parallel. **Results.** Fig. 4 shows that random subspaces improve over global surrogates but may introduce inconsistencies across layers, which may adversely affect convergence. Layerwise optimization achieved a $2.4\times$ reduction in convergence time and 50% lower final TVD. The advantage grows as circuits deepen, where synchronization overhead is outweighed by locality-aware updates. Independent per-layer surrogates allow meaningful improvements without incurring global coordination costs at every step. These findings empirically validate our theoretical results (Theorem IV.8) and highlight the importance of exploiting ansatz structure for efficient probability distribution matching.

C. Hardware-Efficient Scaling (Q3)

We varied the number of ansatz layers (2–5) and the number of measurement shots (75 to 10,000) in the VQE sampling task to evaluate how these factors affect CircuitTree’s fidelity. Each configuration was repeated across multiple seeds. **Results.** Fig. 5 shows that three to four layers yield the best balance between expressivity and trainability: CircuitTree consistently reached low TVD with minimal variance in this range. Two layers underfit the target distribution and exhibited unstable convergence, whereas five layers introduced overparameterization, degrading performance. Further, 250 shots were sufficient to achieve stable convergence. Using only 75 shots produced high variance and unreliable results, whereas increasing to 500 or even 10,000 shots offered no significant fidelity gains: a trend also observed for other circuits. These findings demonstrate that CircuitTree achieves hardware-

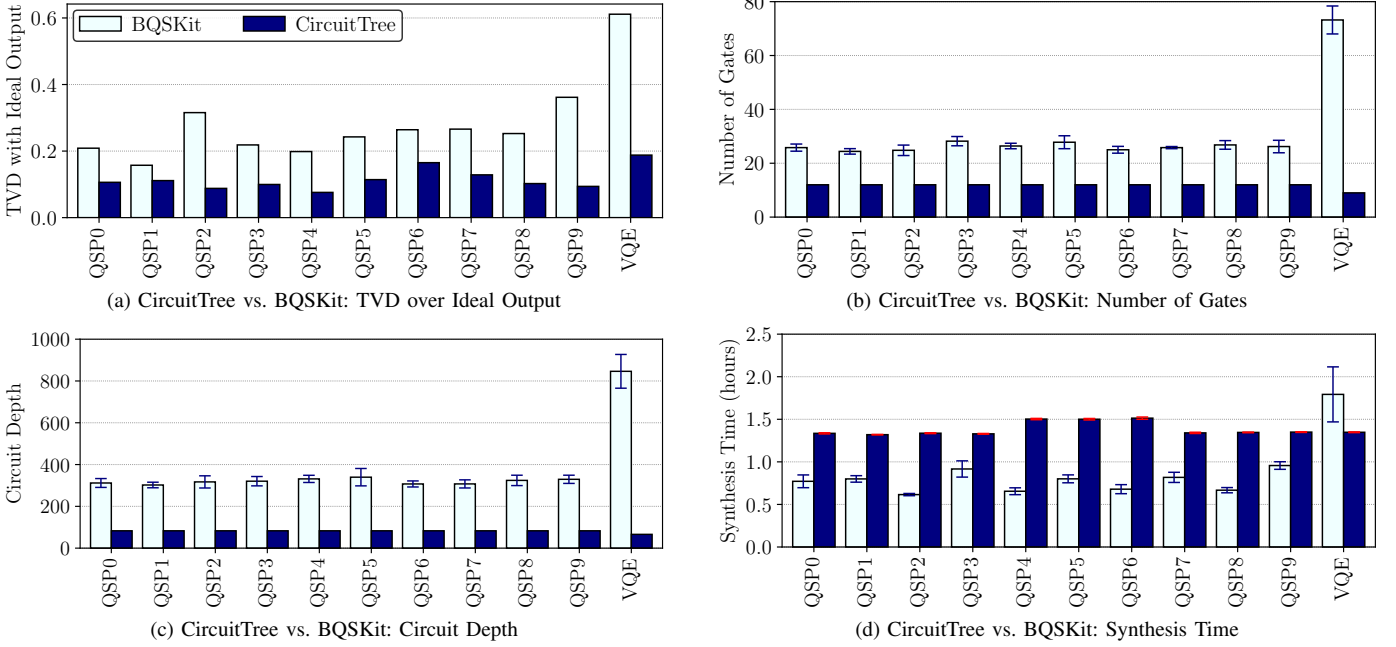


Fig. 6: Comparison of CircuitTree and BQSKit on QSP and VQE workloads executed on IBM `ibm_nazca`. CircuitTree achieves higher fidelity with fewer gates and shallower depth, at the cost of increased but consistent classical runtime.

efficient matching with modest circuit depth and measurement overhead, making it well suited to near-term devices.

D. Reduced-Budget Optimizer Baselines (Q4)

Given the GPBO scaling problem discussed earlier, we now ask how it would perform under a reduced budget. **Results.** Table II summarizes the results under a fixed budget of 60 objective evaluations. CircuitTree consistently outperforms GPBO across all six task–target instances in both final TVD and runtime. On VQE, CircuitTree achieves 0.403 ± 0.048 compared to 0.410 ± 0.091 for GPBO while reducing runtime from 114 s to 24.8 s. Across the three RQCs, CircuitTree improves TVD while reducing runtime from roughly 76–109 s to 24–27 s. On the QSP targets, CircuitTree again outperforms GPBO in both fidelity and runtime. Overall, CircuitTree outperforms GPBO even in the reduced-budget setting.

E. Application Evaluation: QSP and VQE (Q5)

We next evaluate CircuitTree on application-relevant workloads executed on IBM’s `ibm_nazca` quantum computer. This hardware study is complementary to the reduced-budget simulator baselines above and compares CircuitTree against BQSKit across three metrics: (1) fidelity measured as TVD between hardware and ideal simulation, (2) circuit complexity (depth and two-qubit gate count), and (3) synthesis runtime.

Results. On real hardware, CircuitTree reduced output error by up to 59% compared to BQSKit (e.g., 0.12 vs. 0.28 for VQE), reduced two-qubit gate counts by 61%, and shortened circuit depth by 78%. These hardware-level improvements follow from surrogate-guided tuning of a fixed-depth ansatz, which ensures stable convergence and consistent circuit size. BQSKit, in contrast, produced variable-depth circuits with

inconsistent fidelity. CircuitTree also exhibited lower variance across runs on QSP tasks (0.02 vs. 0.06 standard deviation). While CircuitTree incurred approximately $1.5\times$ higher classical runtime, this overhead was predictable, purely classical, and offset by fidelity gains and noise robustness. Importantly, trusted reference statistics were required only for VQE tasks and could be amortized across repeated uses of the distribution, making the approach practical in the near term.

VIII. RELATED WORK

Bayesian Optimization and Surrogate Modeling. Bayesian Optimization (BO) is a standard framework for optimizing expensive black-box functions [12], [61]. Classical BO typically employs Gaussian Process surrogates due to their closed-form posterior updates and uncertainty quantification [13]. However, GP-based methods scale poorly in high dimensions and rely on smoothness assumptions that break down in the discontinuous loss landscapes induced by quantum measurements [15]. Scalable alternatives have been proposed, including random forests [62] and gradient-boosted trees [34]. Our contribution extends this line of work by analyzing tree-based surrogates in probability distribution matching and proving convergence guarantees under structured parameter spaces.

Structured and Modular Optimization. Decomposition strategies have been widely studied to improve sample efficiency in BO, including hierarchical models [36], additive decompositions [37], and factorized acquisition rules [63]. These often assume independence between subcomponents or rely on a known decomposition. In contrast, our approach exploits the explicit layered structure to define distributed surrogate subproblems. This is related to block-coordinate

descent and regional-division methods [64], but differs in that the global objective is never fully evaluated; only distributional statistics from layered surrogates guide optimization.

Quantum Circuit Synthesis and State Preparation. Traditional circuit synthesis relies on algebraic, rule-based, or template-matching approaches [65], [4], [66], [67], [68], [69], [26], [70], [71]. More recent techniques include gradient-based variational optimization [10] and probabilistic decomposition strategies [44], [9]. These approaches typically assume access to gradients or explicit unitaries, both of which are impractical in near-term settings. Our work departs from this paradigm by explicitly targeting the domain of distribution matching, where gradients are unavailable and non-smoothness dominates, making optimization challenging.

Machine Learning for Quantum Compilation. There is increasing interest in applying ML to quantum compilation, transpilation, and general synthesis [72], [73]. Most existing methods are empirical and heuristic, offering limited theoretical foundations. By contrast, our contribution provides the first provable convergence guarantees for probability distribution matching using non-Gaussian surrogates, leveraging ensemble tree models and structured optimization to achieve both scalability and theoretical rigor.

IX. CONCLUSION

We presented CircuitTree, a surrogate-guided framework for domain-aware probability distribution matching and sampling based on structured Bayesian Optimization. By combining tree-based surrogate models with a distributed, layerwise decomposition of the parameter space, our approach scales to high-dimensional, non-smooth objectives without relying on gradient information or full unitary access. We provided formal convergence guarantees under mild assumptions, and empirically validated the method's efficacy on both simulated and real hardware. This work contributes to the growing field of structured hybrid quantum algorithm design, demonstrating that non-Gaussian surrogates can achieve both scalability and provable convergence in quantum settings.

APPENDIX

A. PROOF FOR THEOREM IV.8

Let

$$\Theta \subset \mathbb{R}^d, \quad D = \text{diam}(\Theta) < \infty, \\ f : \Theta \rightarrow \mathbb{R}, \quad f^* = \inf_{\theta \in \Theta} f(\theta).$$

We restate the main assumptions for clarity.

a) *Assumption 4.1 (Lipschitz Continuity).*: The loss function f is L -Lipschitz with respect to the ℓ_2 norm:

$$|f(\theta) - f(\theta')| \leq L \|\theta - \theta'\|_2 \quad \forall \theta, \theta' \in \Theta.$$

b) *Assumption 4.2 (Bounded, Centered Noise).*: At step $t \geq 1$, the algorithm queries θ_t and observes

$$y_t = f(\theta_t) + \xi_t, \quad \mathbb{E}[\xi_t] = 0, \quad |\xi_t| \leq \sigma \text{ almost surely.}$$

Here ξ_t models the stochastic noise in our evaluation of $f(\theta_t)$ (for example, due to a finite number of measurement

shots). The condition $\mathbb{E}[\xi_t] = 0$ states that this estimator of $f(\theta_t)$ is unbiased, while the bound $|\xi_t| \leq \sigma$ provides a uniform control on the magnitude of the noise.

A gradient-boosted regression tree (GBRT) surrogate is fitted at each BO round t using the dataset $D_t = \{(\theta_i, y_i)\}_{i=1}^t$. It is represented as an ensemble of M_t regression trees $h_{t,m} : \Theta \rightarrow \mathbb{R}$, combined with shrinkage parameter $0 < \nu \leq 1$:

$$\hat{f}_t(\theta) = \hat{f}_0(\theta) + \nu \sum_{m=1}^{M_t} h_{t,m}(\theta),$$

where $\hat{f}_0$ is an initial constant predictor (e.g., the mean of $\{y_i\}$). At boosting stage m , we compute pseudo-residuals

$$g_{t,m-1,i} := -\frac{\partial}{\partial \hat{y}} \mathcal{L}(y_i, \hat{f}_{t,m-1}(\theta_i)), \quad i = 1, \dots, t,$$

for a pointwise loss $\mathcal{L}(y, \hat{y})$ (in our implementation, $\mathcal{L}(y, \hat{y}) = (y - \hat{y})^2$ so that $g_{t,m-1,i}$ are standard residuals). The new tree $h_{t,m}$ is obtained by least-squares regression onto these pseudo-residuals:

$$h_{t,m} = \arg \min_h \sum_{i=1}^t (g_{t,m-1,i} - h(\theta_i))^2.$$

We then update the ensemble as

$$\hat{f}_{t,m}(\theta) = \hat{f}_{t,m-1}(\theta) + \nu h_{t,m}(\theta),$$

and set $\hat{f}_t := \hat{f}_{t,M_t}$.

The empirical mean and variance across trees at round t are

$$\mu_t(\theta) = \frac{1}{M_t} \sum_{m=1}^{M_t} h_{t,m}(\theta), \\ s_t^2(\theta) = \frac{1}{M_t} \sum_{m=1}^{M_t} (h_{t,m}(\theta) - \mu_t(\theta))^2.$$

The algorithm selects query points via a confidence-bound rule for minimization:

$$\theta_{t+1} = \arg \min_{\theta \in \Theta} \left\{ \mu_t(\theta) - \kappa_t s_t(\theta) \right\}, \quad (1)$$

where $\kappa_t > 0$ is an exploration multiplier. Empirically, we use expected improvement (EI) as the acquisition function; for the analysis we work with the confidence-bound rule (1), which plays a similar exploration–exploitation role.

Definition A.1 (Covering Radius). The covering radius at round t is

$$\rho_t := \sup_{\theta \in \Theta} \min_{1 \leq i \leq t} \|\theta - \theta_i\|_2.$$

A. Lower Bound on Ensemble Variance at Unexplored Points

Lemma A.2. Fix $t \geq 1$. Suppose $\tilde{\theta} \in \Theta$ has never been queried, i.e. $\tilde{\theta} \neq \theta_i$ for all $1 \leq i \leq t$. Assume that at least one tree assigns $\tilde{\theta}$ to an empty leaf, i.e. a region of the partition containing no training points. Then the ensemble variance satisfies

$$s_t^2(\tilde{\theta}) \geq \eta,$$

where $\eta > 0$ depends only on past evaluations and the shrinkage parameter ν , and the ensemble size sequence $\{M_u\}_{u \leq t}$.

a) *Proof.*:

- 1) For each tree h_m , let $\ell_m(\theta)$ denote the leaf containing θ . Define $A_m(\theta) = \{i \leq t : \theta_i \in \ell_m(\theta)\}$, i.e. the indices of training points in the same leaf. The leaf prediction is

$$h_m(\theta) := \begin{cases} \frac{1}{|A_m(\theta)|} \sum_{i \in A_m(\theta)} r_{m,i}, & \text{if } |A_m(\theta)| > 0, \\ 0, & \text{if } |A_m(\theta)| = 0. \end{cases}$$

where $r_{m,i}$ is the residual for sample i at tree m .

- 2) Square-loss boosting fits each tree h_m to residuals $r_{m,i} = y_i - \hat{f}_{m-1}(\theta_i)$. Least-squares fitting ensures

$$\frac{1}{t} \sum_{i=1}^t r_{m^*,i}^2 = \min_c \frac{1}{t} \sum_{i=1}^t (r_{m^*,i} - c)^2.$$

Taking $c = \bar{r}_{m^*} = \frac{1}{t} \sum_i r_{m^*,i}$ yields

$$s_{\text{res}}^2 := \frac{1}{t} \sum_{i=1}^t (r_{m^*,i} - \bar{r}_{m^*})^2 > 0,$$

since residuals cannot all be identical under bounded but varying noise.

- 3) For the tree m^* with an empty leaf at $\tilde{\theta}$, we have $h_{m^*}(\tilde{\theta}) = 0$. Using variance decomposition across trees,

$$s_t^2(\tilde{\theta}) \geq \frac{\nu^2}{M_t} s_{\text{res}}^2.$$

Since $M_t \leq M_{\max}$, we conclude

$$s_t^2(\tilde{\theta}) \geq \frac{\nu^2}{M_{\max}} s_{\text{res}}^2 =: \eta > 0.$$

□

B. Density of Queries in Θ

Lemma A.3. Fix $r > 0$ and $\tilde{\theta} \in \Theta$. There exists a finite index $t_r(\tilde{\theta})$ such that

$$\|\theta_{t_r(\tilde{\theta})} - \tilde{\theta}\|_2 \leq r.$$

a) Proof.: Let $B(\tilde{\theta}, r)$ denote the open r -ball around $\tilde{\theta}$. Suppose, for contradiction, that no θ_i with $i \leq t$ lies in $B(\tilde{\theta}, r)$. Then Lemma 1 implies $s_{i-1}(\theta) \geq \eta$ for all $\theta \in B(\tilde{\theta}, r)$.

As more points are sampled, the predictive variance at already-sampled points $s_{i-1}(\theta_{i-1})$ decreases; assuming in particular that $s_{i-1}(\theta_{i-1}) \rightarrow 0$, choose κ_{i-1} large enough (e.g., with $\kappa_t \rightarrow \infty$ slowly, such as $\kappa_t = \sqrt{\log t}$) that

$$\mu_{i-1}(\theta_{i-1}) - \kappa_{i-1} s_{i-1}(\theta_{i-1}) > \inf_{\theta \in B(\tilde{\theta}, r)} \left\{ \mu_{i-1}(\theta) - \kappa_{i-1} s_{i-1}(\theta) \right\}.$$

By the UCB rule in (1), the next query point lies in $B(\tilde{\theta}, r)$, contradicting the assumption. Hence such a $t_r(\tilde{\theta})$ exists. Applying a Borel–Cantelli argument to a countable basis of rational balls implies $\lim_{t \rightarrow \infty} \rho_t = 0$, i.e. the query sequence is dense in Θ . □

C. Simple regret bound from the covering radius

We bound the quality of the *incumbent* (best observed query) using only Lipschitz continuity and covering radius.

Definition A.4 (Incumbent and incumbent simple regret). For $t \geq 1$, define an incumbent index

$$\hat{i}_t \in \arg \min_{1 \leq i \leq t} y_i,$$

and the corresponding incumbent point

$$\hat{\theta}_t := \theta_{\hat{i}_t}.$$

Define its (true) simple regret by

$$r_t^{\text{inc}} := f(\hat{\theta}_t) - f^*.$$

Lemma A.5 (Lipschitz bound for the incumbent). Assume Assumptions 4.1 and 4.2. For every $t \geq 1$,

$$r_t^{\text{inc}} \leq L\rho_t + 2\sigma \quad \text{almost surely.}$$

In particular,

$$\mathbb{E}[r_t^{\text{inc}}] \leq L \mathbb{E}[\rho_t] + 2\sigma.$$

a) Proof.: Fix any $\varepsilon > 0$ and choose $\theta_\varepsilon^* \in \Theta$ such that

$$f(\theta_\varepsilon^*) \leq f^* + \varepsilon,$$

which exists by the definition of $f^* = \inf_{\theta \in \Theta} f(\theta)$. By the definition of the covering radius ρ_t , there exists an index $i_\varepsilon^*(t) \in \{1, 2, \dots, t\}$ such that

$$\|\theta_{i_\varepsilon^*(t)} - \theta_\varepsilon^*\|_2 \leq \rho_t.$$

By Lipschitz continuity (Assumption 4.1),

$$f(\theta_{i_\varepsilon^*(t)}) \leq f(\theta_\varepsilon^*) + L\rho_t \leq f^* + \varepsilon + L\rho_t.$$

Since $\hat{i}_t$ minimizes the observed values y_i over $i \leq t$,

$$y_{\hat{i}_t} \leq y_{i_\varepsilon^*(t)}.$$

Using the bounded noise model $y_i = f(\theta_i) + \xi_i$ with $|\xi_i| \leq \sigma$ (Assumption 4.2), we have

$$f(\hat{\theta}_t) \leq y_{\hat{i}_t} + \sigma \leq y_{i_\varepsilon^*(t)} + \sigma \leq f(\theta_{i_\varepsilon^*(t)}) + 2\sigma \leq f^* + \varepsilon + L\rho_t + 2\sigma.$$

Rearranging yields $r_t^{\text{inc}} \leq L\rho_t + 2\sigma + \varepsilon$. Since $\varepsilon > 0$ is arbitrary, we conclude $r_t^{\text{inc}} \leq L\rho_t + 2\sigma$. □

Remark A.6 (About rates). A classical covering argument implies that for any diameter- D subset of $\mathbb{R}^d$, there exists a set of t points whose covering radius is at most

$$\rho_t \leq \left(\frac{C_d D^d}{t} \right)^{1/d}, \quad C_d = \frac{\pi^{d/2}}{\Gamma(1 + d/2)}.$$

This bound describes what is achievable by a *space-filling* design (or the optimal placement of t points). If the query sequence is constructed (or augmented) to satisfy such a bound, then the noise-free incumbent regret obeys $r_t^{\text{inc}} = O(t^{-1/d})$ by Lemma A.5.

D. Theorem Statement

From the density argument above, $\rho_t \rightarrow 0$ as $t \rightarrow \infty$. Applying Lemma A.5 yields

$$\limsup_{t \rightarrow \infty} \mathbb{E}[f(\hat{\theta}_t)] \leq f^* + 2\sigma,$$

and in the noise-free case $\sigma = 0$,

$$f(\hat{\theta}_t) \leq f^* + L\rho_t \rightarrow f^*,$$

hence $\lim_{t \rightarrow \infty} f(\hat{\theta}_t) = f^*$. This proves Theorem IV.8.

ACKNOWLEDGEMENT

We thank the anonymous reviewers for their helpful comments, which improved this work. This work was supported by Rice University, Santa Clara University, the Rice University George R. Brown School of Engineering and Computing, the Rice University Department of Computer Science, the DOE Quantum Testbed Finder Award DE-SC0024301, the Ken Kennedy Institute, and the Rice Quantum Initiative within the Smalley-Curl Institute. Hengrui Luo was supported by the U.S. Department of Energy under Contract DE-AC02-05CH11231 and the U.S. National Science Foundation under Grant NSF-DMS 2412403. Generative AI tools were used for code and text editing, and all edits were reviewed and verified by the authors. We acknowledge the use of IBM Quantum services. The views expressed are those of the authors and do not necessarily reflect those of IBM or the IBM Quantum team.

REFERENCES

- [1] Lata Kh Joshi, Filiberto Ares, Manoj K Joshi, Christian F Roos, and Pasquale Calabrese. Measuring full counting statistics in a trapped-ion quantum simulator. *Physical Review Letters*, 135(16):160601, 2025.
- [2] Marcello Benedetti, Harry Buhrman, and Jordi Weggemans. Provable and verifiable quantum advantage in sample complexity. *Phys. Rev. Lett.*, 136:040601, Jan 2026.
- [3] Dominik Hangleiter and Jens Eisert. Computational advantage of quantum random sampling. *Reviews of Modern Physics*, 95(3):035001, 2023.
- [4] Yunseong Nam, Neil J Ross, Yuan Su, Andrew M Childs, and Dmitri Maslov. Automated optimization of large quantum circuits with continuous parameters. *npj Quantum Information*, 4(1):23, 2018.
- [5] Jason Han, Nicholas S DiBrita, Younghyun Cho, Hengrui Luo, and Tirthak Patel. EnQode: Fast Amplitude Embedding for Quantum Machine Learning Using Classical Data. *ACM/IEEE Design Automation Conference (DAC)*, 2025.
- [6] John Preskill. Quantum computing in the NISQ era and beyond. *Quantum*, 2:79, 2018.
- [7] Gennaro De Luca. A survey of NISQ era hybrid quantum-classical machine learning research. *Journal of Artificial Intelligence and Technology*, 2(1):9–15, 2022.
- [8] Ethan Smith, Marc G Davis, Jeffrey M Larson, Ed Younis, Costin Iancu, and Wim Lavrijsen. LEAP: Scaling Numerical Optimization Based Synthesis Using an Incremental Approach. *arXiv preprint arXiv:2106.11246*, 2021.
- [9] Ed Younis, Koushik Sen, Katherine Yelick, and Costin Iancu. Qfast: Conflating search and numerical optimization for scalable quantum circuit synthesis. In *2021 IEEE International Conference on Quantum Computing and Engineering (QCE)*, pages 232–243. IEEE, 2021.
- [10] Sumeet Khatri, Ryan LaRose, Alexander Poremba, Lukasz Cincio, Andrew T Sornborger, and Patrick J Coles. Quantum-assisted quantum compiling. *Quantum*, 3:140, 2019.
- [11] Prakash Murali, David C McKay, Margaret Martonosi, and Ali Javadi-Abhari. Software Mitigation of Crosstalk on Noisy Intermediate-Scale Quantum Computers. In *Proceedings of the Twenty-Fifth International Conference on Architectural Support for Programming Languages and Operating Systems*, pages 1001–1016, 2020.
- [12] Eric Brochu, Vlad M Cora, and Nando De Freitas. A tutorial on bayesian optimization of expensive cost functions, with application to active user modeling and hierarchical reinforcement learning. *arXiv preprint arXiv:1012.2599*, 2010.
- [13] Jasper Snoek, Hugo Larochelle, and Ryan P Adams. Practical bayesian optimization of machine learning algorithms. *Advances in neural information processing systems*, 25, 2012.
- [14] Bobak Shahriari, Kevin Swersky, Ziyu Wang, Ryan P Adams, and Nando De Freitas. Taking the human out of the loop: A review of bayesian optimization. *Proceedings of the IEEE*, 104(1):148–175, 2015.
- [15] Ziyu Wang, Frank Hutter, Masrour Zoghi, David Matheson, and Nando De Freitas. Bayesian optimization in a billion dimensions via random embeddings. *Journal of Artificial Intelligence Research*, 55:361–387, 2016.
- [16] Eric Han, Ishank Arora, and Jonathan Scarlett. High-dimensional bayesian optimization via tree-structured additive models. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 35, pages 7630–7638, 2021.
- [17] Tirthak Patel, Abhay Potharaju, Baolin Li, Rohan Roy, and Devesh Tiwari. Experimental Evaluation of NISQ Quantum Computers: Error Measurement, Characterization, and Implications. In *2020 SC20: International Conference for High Performance Computing, Networking, Storage and Analysis (SC)*, pages 636–650. IEEE Computer Society, 2020.
- [18] Tirthak Patel, Ed Younis, Costin Iancu, Wibe de Jong, and Devesh Tiwari. QUEST: Systematically Approximating Quantum Circuits for Higher Output Fidelity. In *Proceedings of the 27th ACM International Conference on Architectural Support for Programming Languages and Operating Systems*, pages 514–528, 2022.
- [19] Zoë Holmes, Kunal Sharma, M. Cerezo, and Patrick J. Coles. Connecting Ansatz Expressibility to Gradient Magnitudes and Barren Plateaus. *PRX Quantum*, 3(1):010313, January 2022.
- [20] Changhun Oh, Minzhao Liu, Yuri Alexeev, Bill Fefferman, and Liang Jiang. Classical algorithm for simulating experimental gaussian boson sampling. *Nature Physics*, pages 1–8, 2024.
- [21] Joseph Clark and Himanshu Thapliyal. Peephole optimization for quantum approximate synthesis. In *2024 25th International Symposium on Quality Electronic Design (ISQED)*, pages 1–8. IEEE, 2024.
- [22] Tirthak Patel and Devesh Tiwari. QRAFT: Reverse your Quantum Circuit and Know the Correct Program Output. In *Proceedings of the 26th ACM International Conference on Architectural Support for Programming Languages and Operating Systems*, pages 443–455, 2021.
- [23] Hengrui Luo, Younghyun Cho, James W. Demmel, Xiaoye S. Li, and Yang Liu. Hybrid parameter search and dynamic model selection for mixed-variable bayesian optimization. *Journal of Computational and Graphical Statistics*, 33(3):855–868, 2024.
- [24] Hengrui Luo, Younghyun Cho, James W. Demmel, Igor Kozachenko, Xiaoye S Li, and Yang Liu. Non-smooth bayesian optimization in tuning scientific applications. *The International Journal of High Performance Computing Applications*, 38(6):633–657, 2024.
- [25] Shouvanik Chakrabarti, Huang Yiming, Tongyang Li, Soheil Feizi, and Xiaodi Wu. Quantum wasserstein generative adversarial networks. In H. Wallach, H. Larochelle, A. Beygelzimer, F. d’Alché-Buc, E. Fox, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 32. Curran Associates, Inc., 2019.
- [26] Kim Nicoli, Christopher J Anders, Lena Funcke, Tobias Hartung, Karl Jansen, Stefan Kühn, Klaus-Robert Müller, Paolo Stornati, Pan Kessel, and Shinichi Nakajima. Physics-informed bayesian optimization of variational quantum circuits. *Advances in Neural Information Processing Systems*, 36, 2024.
- [27] Alexander Benítez-Buenache and Queralt Portell-Montserrat. Bayesian parameterized quantum circuit optimization (bpqco): A task and hardware-dependent approach. *arXiv preprint arXiv:2404.11253*, 2024.
- [28] Carl Edward Rasmussen and Christopher K. I. Williams. *Gaussian Processes for Machine Learning*. The MIT Press, 11 2005.
- [29] Hengrui Luo, Giovanni Nattino, and Matthew T. Pratala. Sparse Additive Gaussian Process Regression. *Journal of Machine Learning Research*, 23(61):1–34, 2022.
- [30] Michael A Nielsen and Isaac L Chuang. *Quantum computation and quantum information*. Cambridge university press, 2010.
- [31] Nicolai Meinshausen and Greg Ridgeway. Quantile regression forests. *Journal of machine learning research*, 7(6), 2006.
- [32] John Preskill. Quantum Computing 40 Years Later. *arXiv preprint arXiv:2106.10522*, 2021.
- [33] Daniel Silver, Tirthak Patel, William Cutler, Aditya Ranjan, Harshitta Gandhi, and Devesh Tiwari. MosaiQ: Quantum Generative Adversarial Networks for Image Generation on NISQ Computers. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 7030–7039, 2023.
- [34] Scikit-Optimize. Scikit-Optimize. <https://github.com/scikit-optimize/scikit-optimize>, 2024. Accessed: 2024-05-01.

- [35] Souhaib Ben Taieb, Raphaël Huser, Rob J Hyndman, and Marc G Genton. Forecasting uncertainty in electricity smart meter data by boosting additive quantile regression. *IEEE Transactions on Smart Grid*, 7(5):2448–2455, 2016.
- [36] Kevin Swersky, Jasper Snoek, and Ryan P Adams. Multi-task bayesian optimization. *Advances in neural information processing systems*, 26, 2013.
- [37] Kirthevasan Kandasamy, Jeff Schneider, and Barnabas Poczos. High dimensional bayesian optimisation and bandits via additive models. In Francis Bach and David Blei, editors, *Proceedings of the 32nd International Conference on Machine Learning*, volume 37 of *Proceedings of Machine Learning Research*, pages 295–304, Lille, France, 07–09 Jul 2015. PMLR.
- [38] Marco Cerezo, Andrew Arrasmith, Ryan Babbush, Simon C Benjamin, Suguru Endo, Keisuke Fujii, Jarrod R McClean, Kosuke Mitarai, Xiao Yuan, Lukasz Cincio, et al. Variational Quantum Algorithms. *Nature Reviews Physics*, 3(9):625–644, 2021.
- [39] Daniel Silver, Tirthak Patel, and Devesh Tiwari. Quilt: Effective Multi-class Classification on Quantum Computers using an Ensemble of Diverse Quantum Classifiers. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 36, pages 8324–8332, 2022.
- [40] Hanrui Wang, Yongshan Ding, Jiaqi Gu, Yujun Lin, David Z Pan, Frederic T Chong, and Song Han. QuantumNAS: Noise-Adaptive Search for Robust Quantum Circuits. In *2022 IEEE International Symposium on High-Performance Computer Architecture (HPCA)*, pages 692–708. IEEE, 2022.
- [41] Ellis Wilson, Sudhakar Singh, and Frank Mueller. Just-in-time Quantum Circuit Transpilation Reduces Noise. *arXiv preprint arXiv:2005.12820*, 2020.
- [42] Davide Castelvetti. IBM’s Quantum Cloud Computer Goes Commercial. *Nature News*, 543(7644):159, 2017.
- [43] F. Pedregosa, G. Varoquaux, A. Gramfort, V. Michel, B. Thirion, O. Grisel, M. Blondel, P. Prettenhofer, R. Weiss, V. Dubourg, J. Vanderplas, A. Passos, D. Cournapeau, M. Brucher, M. Perrot, and E. Duchesnay. Scikit-learn: Machine learning in Python. *Journal of Machine Learning Research*, 12:2825–2830, 2011.
- [44] Ed Younis, Costin C. Iancu, Wim Lavrijsen, Marc Davis, and Ethan Smith. Berkeley quantum synthesis toolkit (bqskit) v1. [Computer Software] <https://doi.org/10.11578/dc.20210603.2>, apr 2021.
- [45] Gadi Aleksandrowicz, Thomas Alexander, Panagiotis Barkoutsos, Luciano Bello, Yael Ben-Haim, David Bucher, Francisco Jose Cabrera-Hernández, Jorge Carballo-Franquis, Adrian Chen, Chun-Fu Chen, Jerry M. Chow, Antonio D. Córcoles-Gonzales, Abigail J. Cross, Andrew Cross, Juan Cruz-Benito, Chris Culver, Salvador De La Puente González, Enrique De La Torre, Delton Ding, Eugene Dumitrescu, Ivan Duran, Pieter Eendebak, Mark Everitt, Ismael Faro Sertage, Albert Frisch, Andreas Fuhrer, Jay Gambetta, et al. Qiskit: An Open-source Framework for Quantum Computing, January 2019.
- [46] Ang Li, Samuel Stein, Sriram Krishnamoorthy, and James Ang. QASM-Bench: A Low-Level Quantum Benchmark Suite for NISQ Evaluation and Simulation. *ACM Transactions on Quantum Computing*, 4(2):1–26, 2023.
- [47] J. W. O. Garmon, R. C. Pooser, and E. F. Dumitrescu. Benchmarking noise extrapolation with the openpulse control framework. *Phys. Rev. A*, 101:042308, Apr 2020.
- [48] K Wright, KM Beck, S Debnath, JM Amini, Y Nam, N Grzesiak, J-S Chen, NC Pisenti, M Chmielewski, C Collins, et al. Benchmarking an 11-Qubit Quantum Computer. *Nature communications*, 10(1):1–6, 2019.
- [49] Gokul Subramanian Ravi, Kaitlin N Smith, Pranav Gokhale, and Frederic T Chong. Quantum computing in the cloud: Analyzing job and machine characteristics. In *2021 IEEE International Symposium on Workload Characterization (IISWC)*, pages 39–50. IEEE, 2021.
- [50] Ji Liu, Gregory T Byrd, and Huiyang Zhou. Quantum Circuits for Dynamic Runtime Assertions in Quantum Computation. In *Proceedings of the Twenty-Fifth International Conference on Architectural Support for Programming Languages and Operating Systems*, pages 1017–1030, 2020.
- [51] Robert Wille, Lukas Burgholzer, and Alwin Zulehner. Mapping Quantum Circuits to IBM QX Architectures Using the Minimal Number of SWAP and H Operations. In *Proceedings of the 56th Annual Design Automation Conference 2019*, page 142. ACM, 2019.
- [52] Swamit S Tannu and Moinuddin K Qureshi. Not All Qubits are Created Equal: A Case for Variability-Aware Policies for NISQ-Era Quantum Computers. In *Proceedings of the Twenty-Fourth International Conference on Architectural Support for Programming Languages and Operating Systems*, pages 987–999. ACM, 2019.
- [53] Tirthak Patel, Baolin Li, Rohan Basu Roy, and Devesh Tiwari. UREQA: Leveraging Operation-Aware Error Rates for Effective Quantum Circuit Mapping on NISQ-Era Quantum Computers. In *2020 USENIX Annual Technical Conference (USENIX ATC 20)*, pages 705–711, 2020.
- [54] Sergio Boixo, Sergey V Isakov, Vadim N Smelyanskiy, Ryan Babbush, Nan Ding, Zhang Jiang, Michael J Bremner, John M Martinis, and Hartmut Neven. Characterizing quantum supremacy in near-term devices. *Nature Physics*, 14(6):595–600, 2018.
- [55] Maria Schuld, Francesco Petruccione, David Diepold, and Christian Gogolin. Quantum machine learning in feature hilbert spaces. *Physical Review A*, 99(3):032331, 2019.
- [56] Lov K Grover and Terry Rudolph. Creating superpositions that correspond to efficiently integrable probability distributions. *arXiv preprint quant-ph/0208112*, 2002.
- [57] Kosuke Mitarai, Makoto Negoro, Masahiro Kitagawa, and Keisuke Fujii. Quantum circuit learning. *Physical Review A*, 98(3):032309, 2018.
- [58] Vivek V Shende, Stephen S Bullock, and Igor L Markov. Synthesis of quantum logic circuits. In *Proceedings of the 2005 Asia and South Pacific Design Automation Conference*, pages 272–275, 2005.
- [59] Alberto Peruzzo, Jarrod McClean, Peter Shadbolt, Man-Hong Yung, Xiao-Qi Zhou, Peter J Love, Alán Aspuru-Guzik, and Jeremy L O’Brien. A variational eigenvalue solver on a photonic quantum processor. *Nature communications*, 5(1):4213, 2014.
- [60] Trong Duong, Sang T Truong, Minh Pham, Bao Bach, and June-Koo Rhee. Quantum neural architecture search with quantum circuits metric and bayesian optimization. In *ICML 2022 2nd AI for Science Workshop*, 2022.
- [61] Peter I Frazier. A tutorial on bayesian optimization. *arXiv preprint arXiv:1807.02811*, 2018.
- [62] Frank Hutter, Holger H Hoos, and Kevin Leyton-Brown. Sequential model-based optimization for general algorithm configuration. In *Learning and intelligent optimization: 5th international conference, LION 5, rome, Italy, January 17-21, 2011. selected papers 5*, pages 507–523. Springer, 2011.
- [63] Paul Rolland, Jonathan Scarlett, Ilija Bogunovic, and Volkan Cevher. High-dimensional bayesian optimization via additive models with overlapping groups. In *International conference on artificial intelligence and statistics*, pages 298–307. PMLR, 2018.
- [64] Yu Nesterov. Efficiency of coordinate descent methods on huge-scale optimization problems. *SIAM Journal on Optimization*, 22(2):341–362, 2012.
- [65] Matthew Amy, Dmitri Maslov, Michele Mosca, and Martin Roetteler. A meet-in-the-middle algorithm for fast synthesis of depth-optimal quantum circuits. *IEEE Transactions on Computer-Aided Design of Integrated Circuits and Systems*, 32(6):818–830, 2013.
- [66] Anouk Paradis, Jasper Dekoninck, Benjamin Bichsel, and Martin Vechev. Synthetiq: Fast and versatile quantum circuit synthesis. *Proceedings of the ACM on Programming Languages*, 8(OOPSLA1):55–82, 2024.
- [67] Jonathan Nemirovsky, Maya Chuchem, and Yotam Shapira. Efficient compilation of quantum circuits using multi-qubit gates. *Quantum Science and Technology*, 2025.
- [68] Korbinian Staudacher, Ludwig Schmid, Johannes Zeiher, Robert Wille, and Dieter Kranzlmüller. Multi-controlled phase gate synthesis with zx-calculus applied to neutral atom hardware. *arXiv preprint arXiv:2403.10864*, 2024.
- [69] Nikita A Nemkov, Evgeniy O Kiktenko, Ilia A Luchnikov, and Aleksey K Fedorov. Efficient variational synthesis of quantum circuits with coherent multi-start optimization. *Quantum*, 7:993, 2023.
- [70] Shiro Tamiya and Hayata Yamasaki. Stochastic gradient line bayesian optimization for efficient noise-robust optimization of parameterized quantum circuits. *npj Quantum Information*, 8(1):90, 2022.
- [71] Matthew Amy, Dmitri Maslov, Michele Mosca, and Martin Roetteler. Polynomial-time t-depth optimization of clifford+t circuits via matroid partitioning. *IEEE Transactions on Computer-Aided Design of Integrated Circuits and Systems*, 33(10):1476–1489, 2014.
- [72] Piotr Czarnik, Andrew Arrasmith, Patrick J Coles, and Lukasz Cincio. Error mitigation with clifford quantum-circuit data. *Quantum*, 5:592, 2021.
- [73] Xiangyu Ren, Tianyu Zhang, Xiong Xu, Yi-Cong Zheng, and Shengyu Zhang. Leveraging machine learning for quantum compilation optimization. pages 1–4, 2024.