

Qubit-efficient and gate-efficient encodings of graph partitioning problems for quantum optimization

Tristan Zaborniak 
Department of Computer Science
University of Victoria
 Victoria, BC, Canada
tristanz@uvic.ca

Prashanti Priya Angara 
Department of Computer Science
University of Victoria
 Victoria, BC, Canada
pangara@uvic.ca

Vikram Khipple Mulligan 
Center for Computational Biology
Flatiron Institute
 New York, NY, United States of America
vmulligan@flatironinstitute.org

Hausi A. Müller 
Department of Computer Science
University of Victoria
 Victoria, BC, Canada
hausi@uvic.ca

Ulrike Stege 
Department of Computer Science
University of Victoria
 Victoria, BC, Canada
ustege@uvic.ca

Abstract—We introduce a qubit- and gate-efficient higher-order unconstrained binary optimization (HUBO) encoding for graph partitioning problems requiring label-count minimization. This widely applicable class of problems includes minimum graph coloring, minimum k -cut, and community detection. To the best of our knowledge, this is the first work to address the optimization versions of these problems in a quantum setting, rather than only their decision counterparts. Our construction encodes each vertex variable in a number of bits logarithmic in the number of available labels—the information-theoretic minimum—and employs a novel lexicographic penalty system that implicitly minimizes partition count without requiring dedicated indicator variables. We derive provably sufficient conditions on all penalty coefficients, including those arising from Rosenberg quadratization, guaranteeing feasibility and optimality of the lowest-energy solution. Analogous conditions are derived for a one-hot encoding to enable controlled comparison. We also show that our encoding reduces two-qubit gate count per layer of the quantum approximate optimization algorithm (QAOA). Benchmarking on a quantum annealer demonstrates that our logarithmic encoding greatly improves solution quality and time-to-solution for minimum graph coloring relative to one-hot encoding, with greater advantage as problem size increases.

Index Terms—graph partitioning, graph coloring, quantum optimization, combinatorial optimization, logarithmic encoding, QUBO, HUBO, penalty methods, quantum annealing, QAOA

I. INTRODUCTION

Solving $\mathcal{NP}$ -hard combinatorial optimization problems (COPs) using quantum computers has attracted considerable interest, as approximation advantages versus classical techniques are achievable in principle [1], [2] and have been

TZ, PPA, US, and HAM were funded by a National Sciences and Engineering Research Council of Canada (NSERC) Collaborative Research and Training Experience (CREATE) grant on Quantum Computing, NSERC Alliance Consortium Grant entitled Quantum Software Consortium – Exploring Distributed Quantum Solutions for Canada (QSC), and NSERC Alliance grant on Quantum Computing for Optimal Mobility. TZ was additionally funded by the Simons Foundation. VKM was wholly funded by the Simons Foundation. The computations reported in this paper were performed using an allocation on a D-Wave quantum annealer funded by the Simons Foundation. The Flatiron Institute is a division of the Simons Foundation.

observed in practice [3], [4]. Realizing these advantages, however, critically depends on how efficiently such problems are encoded for execution on quantum hardware. In particular, it is crucial to minimize qubit requirements and gate complexity across hardware generations, as these factors directly impact error rates, quantum error correction overhead, and, ultimately, the feasibility of solving practical problems at scale [5], [6].

Here, we focus on reducing the qubit and gate requirements for a subset of COPs whose variables take symmetric labels in a finite set of size $k > 2$. Such higher-arity variables arise naturally in labeling, clustering, and partitioning tasks, and their structure poses distinctive encoding challenges for quantum optimization, particularly when the cardinality of the assigned label set is itself to be minimized. A canonical example is MINIMUM GRAPH COLORING, in which each vertex is assigned exactly one color, with the objective of minimizing the number of distinct colors used while ensuring that adjacent vertices receive different colors [7]. Many problems—including community detection [8] and graph cutting [9]—share the same underlying form: each vertex v corresponds to a discrete variable $\ell_v \in \{0, \dots, k-1\}$ for some upper bound k , and the cost function depends on equality or inequality relations between the labels of adjacent vertices.

Efficiently encoding such k -valued variables in binary form to allow their compatibility with quantum optimization algorithms is nontrivial. Quantum optimization schemes typically operate on binary degrees of freedom [10]–[14], necessitating a mapping from k -ary choices to bitstrings. The most common such mapping is the one-hot encoding [15], which represents each label with k indicator bits subject to an exclusivity constraint. While amenable to quadratic penalty formulations, one-hot encoding incurs a linear overhead in k for every vertex. This quickly becomes a bottleneck, particularly on near-term hardware: a graph with $|V|$ vertices and k allowed labels requires at least $|V| \cdot k$ binary variables (or qubits). Moreover, one-hot encoding introduces infeasible states and

the need for carefully tuned penalty parameters [16].

As a result, the search for qubit-efficient and gate-efficient encodings of k -valued decision variables is ongoing.¹ Alternatives to one-hot encodings include domain-wall encodings [17], compact encodings using $\lceil \log_2 k \rceil$ qubits per k -ary variable [18]–[20], compact encodings using $\lceil \log_2 m \rceil$ qubits for binary optimization functions expressed natively in terms of m bits [21]–[24], compact encodings using between $\lceil \log_2 m \rceil$ and m qubits for binary optimization functions expressed natively in terms of m bits [25], compressed Hilbert-space representations [26], and other problem- and algorithm-aware constructions that trade qubit count for interaction locality, order, and/or query complexity [27], [28].

Each of these alternative encodings reduce qubit overhead, but suffer from one or more of the following problems: (i) introduction of many higher-order interactions, (ii) more complex feasibility constraints, (iii) considerably increased circuit depth, (iv) considerably increased sampling costs, (v) introduction of error to the objective function, and (vi) non-trivial adaptation or non-applicability to graph partitioning problems with minimum partition count objectives. In fact, only Ref. [18] addresses a graph partitioning problem directly, treating the *decision* version of graph coloring rather than the *optimization* version that seeks to minimize the number of colors used. Taken together, these limitations highlight that the interplay among encoding size, feasible-state geometry, and penalty calibration is central to designing scalable optimization models for k -valued graph problems, including graph partitioning. We examine these trade-offs in Section II.

Here, we introduce a qubit- and gate-efficient HUBO formulation for label-symmetric graph partitioning problems whose objective includes an explicit preference for fewer labels. To the best of our knowledge, our work is the first to treat such problems. Our construction assigns $\lceil \log_2 k \rceil$ bits per vertex and employs a novel lexicographic penalty system that imposes a strict hierarchy among label indices. This enforces a structured ordering that guarantees that feasible solutions favor smaller labels, implicitly capturing the minimum partition count objective without requiring separate indicator variables. The resulting HUBO admits quadratization with explicit bounds on auxiliary variables, making the approach compatible with annealing-based and gate-based quantum optimizers. We provide a comprehensive analysis of our formulation, including:

- (i) Explicit Hamiltonians for general label-symmetric, pairwise-decomposable graph partitioning problems with minimum partition count objectives;
- (ii) Theoretical scaling analysis of qubit count, gate count, and penalty weights, including under Rosenberg order reduction; and
- (iii) Benchmarking results demonstrating the superiority of our approach over one-hot encoding for MINIMUM GRAPH COLORING on a quantum annealer.

¹By *qubit-efficient*, we mean that each k -valued decision variable is encoded using $\lceil \log_2 k \rceil$ qubits, the information-theoretic minimum. By *gate-efficient*, we mean, informally, circuit implementations requiring asymptotically fewer two-qubit gates per variational layer or oracle call than one-hot encodings.

The resulting framework applies broadly across this class of graph partitioning problems and across existing quantum optimization schemes and hardware.

II. BACKGROUND

We now discuss: (i) current approaches to qubit count reduction when encoding COPs, (ii) current quantum combinatorial optimization algorithms compatible with our encodings, and (iii) the class of problems that we treat explicitly in this paper.

A. Qubit-Efficient Encodings of COPs

The standard approach to encoding COPs on quantum hardware employs one-hot encoding [15]. This encoding requires k qubits for each of $|V|$ discrete, k -ary variables, leading to quantum circuits with at least $|V| \cdot k$ qubits. As noted above, there has been effort to develop more qubit-efficient encodings that reduce this overhead, often at the cost of increased circuit depth, higher-order interactions, or more complex feasibility constraints. Here we briefly review these approaches, highlighting their trade-offs and practical limitations.

a) *Domain-Wall Encoding*: Domain-wall encoding represents a k -valued variable using $k - 1$ qubits arranged such that the bit string $1^\ell 0^{k-1-\ell}$ corresponds to value ℓ [17]. This encoding offers a modest qubit reduction over one-hot encoding (from k to $k - 1$ qubits per variable), and a modest reduction in the number of infeasible states. Importantly, as for one-hot encodings, constraints such as equality or inequality between two domain-wall variables can be expressed using only quadratic terms [17], [29]. The primary limitation of domain-wall encoding is therefore that the qubit reduction is minimal. Consequently, it does not provide the exponential or polynomial compression necessary to tackle large-scale instances on hardware-limited quantum processors [30].

b) *Logarithmic Encodings*: A more aggressive compression strategy encodes each k -valued variable into $\lceil \log_2 k \rceil$ qubits using a binary representation [18], [19], [27]. This exponential reduction in qubit count is attractive, but produces higher-order objective functions. For example, when GRAPH COLORING is encoded in this manner, the resulting HUBO objective function has a maximum degree of $2\lceil \log_2 k \rceil$ [19]. Quadratizing these higher-order terms *via* standard techniques introduces $\mathcal{O}(\lceil \log_2 k \rceil)$ auxiliary variables per constraint.

A related approach designed to avoid higher-order overhead compresses k -ary variables into $\lceil \log_2 k \rceil$ qubits by fitting the original cost function to QUBO form *via* overdetermined least-squares [20]. While this achieves exponential qubit reduction, the encoding is lossy: the resulting objective function is an approximation of the original, with approximation error that grows with the degree of compression.

We also mention a critical limitation of logarithmic encodings when applied to m *binary* decision variables (applicable to k -ary problems only after encoding to binary variables) [21]–[24]. Specifically, such encodings are classically tractable when variational circuit depth remains polynomial in the number of qubits [21], [25]. Moreover, such minimal encodings strongly limit the expressivity of the model [25].

c) *Polynomial Encodings*: A recent approach by Sciorilli et al. [25] encodes $m = \mathcal{O}(n^k)$ binary decision variables into correlations of k -body Pauli operators across n qubits, achieving polynomial compression. This compression is achieved by defining each variable $x_i = \text{sign}(\langle \Pi_i \rangle)$, where Π_i is a traceless Pauli string. The quantum circuit is trained to minimize a non-linear loss function of the Pauli expectation values. This encoding offers several advantages: the circuit depth scales sublinearly in n , the number of parameters grows approximately linearly with m , and the scheme super-polynomially mitigates barren plateaus [25].

However, while the encoding requires only three measurement settings ($X^{\otimes k}$, $Y^{\otimes k}$, $Z^{\otimes k}$), the measurement budget can be substantial (as is true of the approach in Ref. [28]): worst-case bounds indicate $\mathcal{O}(m^3)$ measurements are required to estimate the loss function at each stage. Second, the method requires careful hyperparameter tuning. Finally, while the scheme is claimed to be classically intractable for sufficiently large $|V|$, the crossover point where quantum advantage emerges remains empirically unclear.

B. Quantum Optimization Algorithms

Quantum algorithms for combinatorial optimization that are compatible with our encoding include variational quantum computing (VQC) [31], quantum imaginary time evolution (QITE) [12], Grover-based adaptive search (GAS) [13], [32], and adiabatic quantum computation (AQC)/quantum annealing (QA) [33]. We summarize these methods, and briefly comment on their resource use when applied QUBO and HUBO models.

a) *Variational Quantum Computing*: VQC minimizes $\langle \psi(\theta) | H | \psi(\theta) \rangle \geq E_0$ by classically adjusting circuit parameters θ [31]. QUBOs require only 2-qubit gates; k -local HUBO terms are realized via phase gadgets using $2(k-1)$ CNOTs and one R_Z rotation per interaction [11], [34].

b) *Quantum Imaginary Time Evolution*: QITE projects toward the ground state by approximating non-unitary imaginary-time dynamics with local unitaries [12]. Resource scaling depends on estimating $\mathcal{O}(n^k)$ correlators in the worst case for a k -local Hamiltonian, though locality and commutation relations can reduce this cost [35].

c) *Grover Adaptive Search*: GAS iteratively applies Grover amplification with thresholds set by the current best objective value [13], [36]. The oracle circuit depth scales as $\mathcal{O}(n^2)$ for QUBOs and $\mathcal{O}(n^k)$ for degree- k HUBOs. Effectiveness is constrained by oracle circuit depth, which increases rapidly with cost function degree [13].

d) *Adiabatic Quantum Computing / Quantum Annealing*: AQC interpolates from an initial Hamiltonian H_0 to a problem Hamiltonian H_1 whose ground state encodes the optimum [10], [33]. Practical devices typically support only quadratic Ising models, requiring higher-order problems to be reduced to quadratic order before execution. Minimizing qubit count is especially important here, as the inverse spectral gap—which is proportional to Time-to-Solution—typically grows exponentially with qubit number [37].

C. Graph Partitioning Problems

The specific COPs we treat in this work have the following properties. Given an undirected, simple graph $G = (V, E)$:

- (i) **Vertex labelling**. Each vertex $v \in V$ must be assigned a label $\ell_v \in \{0, 1, \dots, k-1\}$ (i.e., $[k]$), where $k \leq |V|$.
- (ii) **Pairwise decomposability**. There exists a pairwise cost or constraint function $\phi_{u,v}(\ell_u, \ell_v)$ for each edge $(u, v) \in E$ such that $\phi_{u,v}(\ell_u, \ell_v) = \phi_{u,v}(\mathbf{1}[\ell_u = \ell_v])$, where $\mathbf{1}[\cdot]$ is the indicator function.
- (iii) **Label symmetry**. The labels are exchangeable; i.e., there is no inherent meaning to label 0 versus label 1, besides the fact that they are different from one another.
- (iv) **Minimum partition count**. The objective is to minimize the number of distinct labels assigned to vertices, assigning only one label per vertex.

We therefore call these problems *label-symmetric, pairwise-decomposable graph partitioning problems with minimization of partition count*. The general form of these problems seeks to minimize the following objective:

$$\min_{\ell: V \rightarrow [k]} \sum_{(u,v) \in E} \phi_{u,v}(\mathbf{1}[\ell_u = \ell_v]) + \lambda \cdot |\{\ell_v : v \in V\}| \quad (1)$$

where $|\{\ell_v : v \in V\}|$ represents the number of distinct labels assigned to the full set of vertices, and the form of $\phi_{u,v}$ is such that we can write it as follows:

$$\phi_{u,v}(\mathbf{1}[\ell_u = \ell_v]) = \alpha_{u,v} \cdot \mathbf{1}[\ell_u = \ell_v] + \beta_{u,v} \cdot (\mathbf{1}[\ell_u \neq \ell_v]) \quad (2)$$

where $\alpha_{u,v}$ and $\beta_{u,v}$ encode *local* properties between vertices that do not depend on label assignments. For example, in the case of MINIMUM GRAPH COLORING, $\beta_{u,v} = 0 \forall (u, v) \in E$, and $\alpha_{u,v} = 1$ when $(u, v) \in E$ and $\alpha_{u,v} = 0$ otherwise.

III. FORMULATING MINIMUM GRAPH COLORING USING A LOGARITHMIC NUMBER OF BITS

In this section, we develop our formulation for MINIMUM GRAPH COLORING, deferring the general case to Section IV. We present both a one-hot QUBO and our logarithmic HUBO formulation, deriving sufficient conditions on all penalty coefficients—including those from Rosenberg quadratization—to guarantee feasibility of the lowest-energy solution. We also compare the two-qubit gate counts of the resulting Hamiltonians.

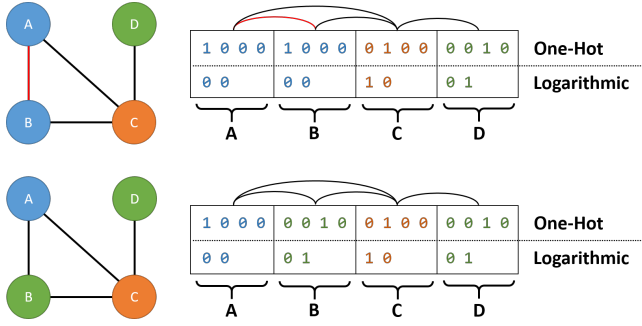


Fig. 1: Small example graph colored improperly (upper row, violating edge colored red) and properly (bottom row). The tables contain bitstring assignments to each vertex under the one-hot and logarithmic encodings. Note that with 4 ($|V|$) vertices, 4 ($|V|$) qubits are required per vertex for one-hot encoding, and 2 ($\lceil \log_2 |V| \rceil$) qubits are required for logarithmic encoding. While the bitstrings are colored for visualization purposes, they do not refer to a *particular* color.

Definition 1: MINIMUM GRAPH COLORING

Input: $G = (V, E)$ with $|V| = n$ and $|E| = m$

Minimize: $|C|$

Where: $\left\{ \begin{array}{l} C \text{ is a family of subsets of } V, \text{ with:} \\ (1) \bigcup_{V_i \in C} V_i = V \\ (2) \forall V_i, V_j \in C, i \neq j, V_i \cap V_j = \emptyset \\ (3) \forall (u, v) \in E, \text{ if } \exists V_i \in C \\ \quad \text{with } u \in V_i, \text{ then } v \notin V_i \end{array} \right.$

We call any family C of subsets of V , which satisfies conditions (1)–(3), a coloring of G .

We begin with an arbitrary undirected, simple graph $G = (V, E)$. The MINIMUM GRAPH COLORING problem is then defined as in Definition 1. See Figure 1 for an example of a graph hosting a proper coloring and an improper coloring.

A. One-Hot MINIMUM GRAPH COLORING QUBO Encoding

In Lucas, 2014 [15], a QUBO model for the decision problem, GRAPH COLORING (GC), is presented, which asks when given a graph G and an integer $C_{\text{num}} = |C| > 0$ if G can have its vertices colored—using no more than C_{num} different colors—in such a way that no two vertices sharing an edge are colored identically. The QUBO model is as follows:

$$H_{\text{GC}}^{\text{one-hot}}(\mathbf{x}) = H_{\text{one-hot}}(\mathbf{x}) + H_{\text{adjacency}}(\mathbf{x}) \quad (3)$$

where:

$$H_{\text{one-hot}}(\mathbf{x}) = A_{\text{one-hot}} \sum_v \left(1 - \sum_{c=1}^{C_{\text{num}}} x_{v,c} \right)^2 \quad (4)$$

$$H_{\text{adjacency}}(\mathbf{x}) = A_{\text{adjacency}} \sum_{(u,v) \in E} \sum_{c=1}^{C_{\text{num}}} x_{u,c} x_{v,c} \quad (5)$$

Here, $x_{v,c}$ is a binary variable which is 1 if vertex v is colored with color c , and 0 otherwise. $A_{\text{one-hot}}$ and $A_{\text{adjacency}}$ are penalties that must be set to ensure that the lowest-energy solution is a coloring. $H_{\text{one-hot}}$ uses the one-hot encoding $\sum_{c=1}^{C_{\text{num}}} x_{v,c}$ and encourages that each vertex is colored only once. $H_{\text{adjacency}}$ penalizes the case where two vertices share an edge that are colored identically. If we are testing C_{num} colors, this formulation requires $|V| \cdot C_{\text{num}}$ binary variables.

In order to express MINIMUM GRAPH COLORING (MGC) as a QUBO, we set $C_{\text{num}} = C_{\text{num}}^u$ ² and add an additional register $\mathbf{y}$ of C_{num} binary variables whose purpose is to indicate the number of colors used using one *indicator* variable per color. The function to minimize is then:

$$H_{\text{MGC}}^{\text{one-hot}}(\mathbf{x}, \mathbf{y}) = H_{\text{GC}}(\mathbf{x}) + H_{\text{count}}(\mathbf{y}) + H_{\text{link}}(\mathbf{x}, \mathbf{y}) \quad (6)$$

where:

$$H_{\text{count}}(\mathbf{y}) = \sum_{c=1}^{C_{\text{num}}} y_c \quad (7)$$

$$H_{\text{link}}(\mathbf{x}, \mathbf{y}) = A_{\text{link}} \sum_v \sum_{c=1}^{C_{\text{num}}} x_{v,c} (1 - y_c) \quad (8)$$

H_{count} is responsible for ensuring that the number of colors used is minimized under the given constraints. H_{link} enforces that if vertex v is colored with color c , then y_c is set to 1. This QUBO formulation requires $(|V| + 1) \cdot C_{\text{num}}$ bits, and three independent penalties.

B. Sufficient Conditions for One-Hot Formulation Penalties

In Equations (3)–(8), $H_{\text{one-hot}}$ and $H_{\text{adjacency}}$ encode the hard problem constraints, H_{count} is the soft objective (corresponding to color count minimization), and H_{link} links the color-usage indicators y_c to the vertex assignments $x_{v,c}$.

We now present sufficient conditions on the penalty coefficients $A_{\text{one-hot}}, A_{\text{adjacency}}, A_{\text{link}} > 0$ that guarantee the following properties for every lowest-energy solution $(\mathbf{x}^*, \mathbf{y}^*)$ of $H_{\text{MGC}}^{\text{one-hot}}$:

- (i) **Indicator faithfulness.** Indicator variables faithfully track color usage: $y_c^* = 1$ if and only if $\sum_v x_{v,c}^* \geq 1$.
- (ii) **Proper coloring.** Edge-sharing vertices are colored differently: $x_{u,c}^* x_{v,c}^* = 0$ for all $(u, v) \in E$ and all c .
- (iii) **One-hot constraint.** Each vertex is assigned exactly one color; i.e., $\sum_c x_{v,c}^* = 1$ for all v .
- (iv) **Color-count minimality.** Among all solutions satisfying (i)–(iii), the number of distinct colors is minimized.

Theorem III.1 (Sufficient One-Hot QUBO Penalties for MINIMUM GRAPH COLORING). *Suppose the penalty coefficients satisfy the following system of inequalities:*

²Here, $C_{\text{num}}^u \leq |V|$ denotes an efficiently-computable upper bound for C_{num} , such as the one obtained by Brook's theorem [38].

$$A_{\text{link}} > 1 \quad (9)$$

$$A_{\text{adjacency}} > A_{\text{link}} \cdot C_{\text{num}} \quad (10)$$

$$A_{\text{one-hot}} > A_{\text{adjacency}} \cdot |E| + A_{\text{link}} \cdot C_{\text{num}} \quad (11)$$

Then every lowest-energy solution $(\mathbf{x}^*, \mathbf{y}^*)$ of $H_{\text{MGC}}(\mathbf{x}, \mathbf{y})$ satisfies properties (i)–(iv).

Proof. We prove (i)–(iv) in order.

(i) Indicator faithfulness. Fix any $\mathbf{x}$ satisfying (iii) and any color c_α . If c_α is used ($\sum_v x_{v,c_\alpha} \geq 1$), setting $y_{c_\alpha} = 1$ costs 1 via H_{count} but saves at least $A_{\text{link}} > 1$ in H_{link} , so $y_{c_\alpha} = 1$ is strictly preferred. If c_α is unused, setting $y_{c_\alpha} = 0$ saves 1 in H_{count} with no change to H_{link} . Thus any optimum satisfying (iii) also satisfies (i).

(ii) Proper coloring. Suppose $(\mathbf{x}^*, \mathbf{y}^*)$ satisfies (iii) but has a monochromatic edge: $x_{u,c_\alpha}^* = x_{v,c_\alpha}^* = 1$ for some $(u, v) \in E$. Recolor u to an unused color c_β , updating $\mathbf{y}$ to satisfy (i). The one-hot and link terms remain 0, H_{count} increases by at most 1, and $H_{\text{adjacency}}$ decreases by at least $A_{\text{adjacency}}$. The net change is at most $1 - A_{\text{adjacency}} < 0$ by Inequality (10), contradicting optimality.

(iii) One-hot constraint. Suppose $(\mathbf{x}^*, \mathbf{y}^*)$ violates the one-hot constraint for some vertex, so $H_{\text{one-hot}}(\mathbf{x}^*) \geq A_{\text{one-hot}}$. Any one-hot-satisfying solution $(\tilde{\mathbf{x}}, \tilde{\mathbf{y}})$ with faithful indicators has $H_{\text{one-hot}} = 0$, $H_{\text{link}} = 0$, $H_{\text{adjacency}} \leq m \cdot A_{\text{adjacency}}$, and $H_{\text{count}} \leq C_{\text{num}}$. Then $H_{\text{MGC}}^{\text{one-hot}}(\tilde{\mathbf{x}}, \tilde{\mathbf{y}}) \leq A_{\text{adjacency}} \cdot |E| + C_{\text{num}} < A_{\text{adjacency}} \cdot |E| + C_{\text{num}} \cdot A_{\text{link}} < A_{\text{one-hot}} \leq H_{\text{MGC}}^{\text{one-hot}}(\mathbf{x}^*, \mathbf{y}^*)$, where the last inequality uses Inequality (11), contradicting optimality.

(iv) Color-count minimality. By (i)–(iii), every optimum has $H_{\text{one-hot}} = H_{\text{adjacency}} = H_{\text{link}} = 0$, so $H_{\text{MGC}}^{\text{one-hot}} = H_{\text{count}} = |\{c : y_c^* = 1\}|$, which is minimized exactly when the number of distinct colors is minimized. $\square$

Corollary III.1.1 (Practical One-Hot QUBO Penalties for MINIMUM GRAPH COLORING). *A convenient explicit choice satisfying the conditions of Theorem III.1 is:*

$$A_{\text{link}} = |V| + 1 \quad (12)$$

$$A_{\text{adjacency}} = A_{\text{link}} \cdot C_{\text{num}} + 1 = (|V| + 1) \cdot C_{\text{num}} + 1 \quad (13)$$

$$A_{\text{one-hot}} = A_{\text{adjacency}} \cdot (|E| + 1) + A_{\text{link}} \cdot C_{\text{num}} \quad (14)$$

since $A_{\text{link}} = |V| + 1 > 1$ satisfies Inequality (9); $A_{\text{adjacency}} = A_{\text{link}} \cdot C_{\text{num}} + 1 > A_{\text{link}} \cdot C_{\text{num}}$ satisfies Inequality (10); and $A_{\text{one-hot}} = A_{\text{adjacency}} \cdot (|E| + 1) + A_{\text{link}} \cdot C_{\text{num}} > A_{\text{adjacency}} \cdot |E| + A_{\text{link}} \cdot C_{\text{num}}$ satisfies Inequality (11).

C. Logarithmic MINIMUM GRAPH COLORING HUBO Encoding

Given that C_{num} colors can be enumerated using $\lceil \log_2 C_{\text{num}} \rceil$ bits, we seek a cost function expressed using such a number of bits per vertex. In this way, we can avoid introducing infeasible solutions by way of one-hot encoding.

Focusing for now on the *adjacency condition*—i.e., that no two adjacent vertices may be colored the same—we must penalize the case where bitstrings corresponding to adjacent

vertices are identical. We accomplish this using a product of XNORs over edge bits, such that GRAPH COLORING then reduces to the following Hamiltonian [18]:

$$H_{\text{GC}}^{\text{logarithmic}}(\mathbf{x}) = \sum_{(u,v) \in E} \prod_{k=1}^{\lceil \log_2 C_{\text{num}} \rceil} (x_{u,k} \odot x_{v,k}) \quad (15)$$

where $x_{v,k}$ refers to bit k of vertex v , and $x_{u,k} \odot x_{v,k} = 2x_{u,k}x_{v,k} - x_{u,k} - x_{v,k} + 1$. When the bitstrings of u and v are identical, $x_{u,k} \odot x_{v,k} = 1$ for all k , such that the product equals 1. Therefore, valid colorings have scores of zero, and invalid colorings have scores greater than zero. This HUBO for GRAPH COLORING uses $|V| \cdot \lceil \log_2 C_{\text{num}} \rceil$ bits, and has a maximum degree of $2 \cdot \lceil \log_2 C_{\text{num}} \rceil$.

When we would like to find the *minimum* number of colors required to color some graph G , we can introduce $\lceil \log_2 C_{\text{num}} \rceil$ linear penalty terms, increasingly strong for increasingly-significant bits within bitstrings. That is, if we assign *significance* to the bits of each vertex bitstring, we can prioritize coloring with “low-significance” bitstrings, and therefore minimize the number of colors required.

Designating the least significant bit by $k = 1$ and the most significant bit by $k = \lceil \log_2 C_{\text{num}} \rceil$, and ensuring that $P_1 < P_2 < \dots < P_{\lceil \log_2 C_{\text{num}} \rceil}$ (see Section III-D for strict bounds on $\{P_k\}_{k \in [\lceil \log_2 C_{\text{num}} \rceil]}$), we have the following MINIMUM GRAPH COLORING HUBO model:

$$H_{\text{MGC}}^{\text{logarithmic}}(\mathbf{x}) = \underbrace{A_{\text{adjacency}} \sum_{(u,v) \in E} \prod_{k=1}^{\lceil \log_2 C_{\text{num}} \rceil} (x_{u,k} \odot x_{v,k})}_{H_{\text{adjacency}}} + \underbrace{\sum_{k=1}^{\lceil \log_2 C_{\text{num}} \rceil} P_k \sum_v x_{v,k}}_{H_{\text{lexicographic}}} \quad (16)$$

where $A_{\text{adjacency}}$ is a tunable penalty. In the next section, we derive explicit bounds on $\{P_k\}_{k \in [1, \dots, \lceil \log_2 C_{\text{num}} \rceil]}$ to ensure that *lexicographic minimization* is preserved (Definition 2).

Definition 2: LEXICOGRAPHIC MINIMIZATION

Given two “index-population” vectors:

$$\mathbf{s} = (s_L, s_{L-1}, \dots, s_1), \quad \mathbf{s}' = (s'_L, s'_{L-1}, \dots, s'_1)$$

where $s_k \in \mathbb{Z}^+ \cup 0$, we say $\mathbf{s} <_{\text{lexicographic}} \mathbf{s}'$ if at the leftmost index k where they differ, we have $s_k < s'_k$. Formally:

$$\mathbf{s} <_{\text{lexicographic}} \mathbf{s}' \iff$$

$$\exists k \in \{L, L-1, \dots, 1\} : s_k < s'_k, s_j = s'_j \forall j > k$$

To *lexicographically minimize* $\mathbf{s}$ in the context of MINIMUM GRAPH COLORING means to find the label assignment (coloring) that is minimal under the $<_{\text{lexicographic}}$ ordering, where $s_k = \sum_{v \in V} x_{v,k}$.

D. Sufficient Conditions for Logarithmic Formulation Penalties

Fix an integer $L = \lceil \log_2 C_{\text{num}} \rceil$ to be the *length* of the bitstring associated with each vertex $v \in V$. For each v , and each index within a bitstring $k \in \{1, \dots, L\}$, $x_{v,k} \in \{0, 1\}$.

We now present sufficient conditions on the penalty coefficients $A_{\text{adjacency}}, P_k \forall k > 0$ that guarantee the following properties for every lowest-energy solution $(\mathbf{x}^*, \mathbf{y}^*)$ of H_{MGC} :

- (i) **Lexicographic ordering.** Among all feasible solutions, $\mathbf{x}^*$ lexicographically minimizes the vector $(s_L, s_{L-1}, \dots, s_1)$.
- (ii) **Feasibility of the optimal solution.** $H_{\text{adjacency}}(\mathbf{x}^*) = 0$; i.e., no edge of G connects two vertices with the same bitstring.

Theorem III.2 (Sufficient Logarithmic HUBO Penalties for MINIMUM GRAPH COLORING). *Suppose $P_1, \dots, P_L$ and $A_{\text{adjacency}}$ satisfy the following two inequalities:*

$$P_{k+1} > |V| \cdot \sum_{j=1}^k P_j, \forall k = 1, \dots, L-1 \quad (17)$$

$$A > |V| \cdot \sum_{k=1}^L P_k \quad (18)$$

Then any lowest-energy solution $\mathbf{x}^*$ of $H_{\text{MGC}}^{\text{one-hot}}(\mathbf{x})$ satisfies properties (i)–(ii).

Proof. We prove (i)–(ii) in order.

(i) **Lexicographic ordering.** Fix any two solutions $\mathbf{x}$ and $\tilde{\mathbf{x}}$ and write their index-population vectors as $(s_L, \dots, s_1)$ and $(s'_L, \dots, s'_1)$, respectively. Let t be the largest index at which these vectors differ:

$$t = \max\{k : s_k \neq s'_k\} \quad (19)$$

Without loss of generality assume $s'_t < s_t$. Then the change in the lexicographic penalty from $\mathbf{x}$ to $\tilde{\mathbf{x}}$ is:

$$\Delta H_{\text{lexicographic}} = P_t \cdot (s'_t - s_t) + \sum_{j=1}^{t-1} P_j \cdot (s'_j - s_j) \quad (20)$$

By construction, $s'_t - s_t \leq -1$, so the first term is at most $-P_t$, and at least $-P_t \cdot (n-1)$. The remaining terms can at worst increase the energy. Then, each $|s'_j - s_j|$ is bounded above by $|V|$, such that:

$$-|V| \cdot \sum_{j=1}^{t-1} P_j \leq \sum_{j=1}^{t-1} P_j \cdot (s'_j - s_j) \leq |V| \cdot \sum_{j=1}^{t-1} P_j \quad (21)$$

Combining these bounds yields:

$$\Delta H_{\text{lexicographic}} \geq -P_t \cdot (n-1) - |V| \cdot \sum_{j=1}^{t-1} P_j \quad (22)$$

$$\Delta H_{\text{lexicographic}} \leq -P_t + |V| \cdot \sum_{j=1}^{t-1} P_j \quad (23)$$

By Inequality (17) with $i = t-1$ we have $P_t > |V| \cdot \sum_{j=1}^{t-1} P_j$; hence, the right-hand side is strictly negative. Therefore $H_{\text{lexicographic}}(\tilde{\mathbf{x}}) < H_{\text{lexicographic}}(\mathbf{x})$. Since t was the most significant index at which the two vectors differed, this shows that any decrease in a more significant count s_t always yields a net decrease in lexicographic energy that cannot be compensated by arbitrary increases in less significant counts. Consequently minimizing $H_{\text{lexicographic}}$ is equivalent to lexicographically minimizing $(s_L, \dots, s_1)$, proving (i).

(ii) **Feasibility of the optimal solution.** Suppose for contradiction that a lowest-energy solution $\mathbf{x}^*$ has at least one violating edge; i.e., $H_{\text{adjacency}}(\mathbf{x}^*) \geq 1$. Construct $\tilde{\mathbf{x}}$ by changing the bits at a single vertex (or a small set of vertices) so as to eliminate at least one violating edge while otherwise choosing the new bits to (approximately) minimize the lexicographic term. The decrease in the adjacency contribution from $\mathbf{x}^*$ to $\tilde{\mathbf{x}}$ is at least $A_{\text{adjacency}}$ (since the number of violating edges is reduced by at least one), while the increase in the lexicographic energy is at most the maximal possible range of the lexicographic term:

$$H_{\text{lexicographic}}(\tilde{\mathbf{x}}) - H_{\text{lexicographic}}(\mathbf{x}^*) \leq |V| \cdot \sum_{k=1}^L P_k \quad (24)$$

because each s_k can change by at most $|V|$ in absolute value.

By Inequality (18) we have:

$$A_{\text{adjacency}} > |V| \cdot \sum_{k=1}^L P_k \quad (25)$$

so the net change in total energy satisfies:

$$H_{\text{MGC}}^{\text{logarithmic}}(\tilde{\mathbf{x}}) - H_{\text{MGC}}^{\text{logarithmic}}(\mathbf{x}^*) \leq -A_{\text{adjacency}} + |V| \cdot \sum_{k=1}^L P_k < 0 \quad (26)$$

Thus $\tilde{\mathbf{x}}$ has strictly smaller total energy than $\mathbf{x}^*$, so $\mathbf{x}^*$ could not have been a lowest-energy solution. This contradiction proves every lowest-energy solution must satisfy $H_{\text{adjacency}} = 0$, i.e. be feasible, proving (ii). $\square$

Corollary III.2.1 (Practical Logarithmic HUBO Penalties for MINIMUM GRAPH COLORING). *A convenient explicit choice that satisfies the conditions of Theorem III.2 is:*

$$P_k = (|V| + 1)^{k-1}, \forall k = 1, \dots, L \quad (27)$$

$$A_{\text{adjacency}} = |V| \cdot \sum_{k=1}^L P_k + 1 \quad (28)$$

For this, $\sum_{j=1}^k P_j \leq (|V| + 1)^k / n$. Hence $P_{k+1} = (|V| + 1)^k > |V| \cdot \sum_{j=1}^k P_j$, and the bound on $A_{\text{adjacency}}$ is immediate.

E. Costs of Reducing HUBO Models to QUBO Models

The HUBO of Equation (16) has degree up to $2L$ where $L = \lceil \log_2 C_{\text{num}} \rceil$. To execute on hardware supporting only

quadratic interactions, we reduce to QUBO form by the Rosenberg method [39], which replaces a product of d binary variables with $d - 2$ auxiliary variables enforced by quadratic penalties (Equations (29)–(30)).

1) *The Rosenberg Reduction Method:* The Rosenberg method reduces higher-order polynomial terms to quadratic form by introducing auxiliary binary variables. For a product of $|V|$ binary variables $\prod_{i=1}^n x_i$, the method requires $n - 2$ auxiliary variables and proceeds recursively. Specifically, to compute the product $x_1 x_2 \cdots x_n$, we introduce auxiliary binary variables $a_1, a_2, \dots, a_{n-2}$ and enforce the constraints:

$$a_1 = x_1 x_2, a_2 = a_1 x_3, \dots, a_{n-2} = a_{n-3} x_n \quad (29)$$

where the final auxiliary variable a_{n-2} represents the desired product. Each constraint $a_i = a_{i-1} x_{i+1}$ can be encouraged using a quadratic penalty term of the form:

$$M_i \cdot (a_i - a_{i-1} x_{i+1})^2 = M_i \cdot (a_i - 2a_i a_{i-1} x_{i+1} + a_{i-1} x_{i+1}) \quad (30)$$

where we have used binary variable idempotency.

2) *Application to Minimum Graph Coloring:* For each edge $(u, v) \in E$, the adjacency term $\prod_{k=1}^L (x_{u,k} \odot x_{v,k})$ is reduced in two stages:

Stage 1. For each edge and bit position k , introduce $y_{u,v,k} = x_{u,k} \odot x_{v,k}$, enforced by a penalty $M_{u,v,k}^{(1)} \cdot (y_{u,v,k} - 1 + x_{u,k} + x_{v,k} - 2x_{u,k}x_{v,k})^2$. This adds $|E| \cdot L$ auxiliary variables.

Stage 2. The resulting product $\prod_{k=1}^L y_{u,v,k}$ is reduced by Rosenberg substitution with $L - 2$ additional auxiliaries per edge, enforced by penalties $\{M_{u,v,i}^{(2)}\}$.

The total auxiliary variable count is $N_{\text{aux}} = |E| \cdot (2L - 2)$, giving a total logical qubit count of $|V| \cdot L + |E| \cdot (2L - 2)$. This is less than the one-hot count $(|V| + 1) \cdot C_{\text{num}}$ when:

$$|E| < \frac{1}{2} \cdot \frac{(|V| + 1) \cdot C_{\text{num}} - \lceil \log_2 C_{\text{num}} \rceil}{\lceil \log_2 C_{\text{num}} \rceil - 1} \quad (31)$$

3) *Setting the Quadraticization Penalty Coefficients:* The penalty coefficients $\{M_{u,v,k}^{(1)}\}$ for $k \in [1, 2, \dots, L]$ and $\{M_{u,v,i}^{(2)}\}$ for $i \in [1, 2, \dots, L - 2]$ must be chosen large enough to ensure properties (i)–(ii) of Theorem III.2.

Theorem III.3 (Sufficient Rosenberg Penalties for Logarithmic MINIMUM GRAPH COLORING HUBO to QUBO Reduction). *Suppose the penalties $\{M_{u,v,k}^{(1)}\}$ for $k \in [1, 2, \dots, L]$ and $\{M_{u,v,i}^{(2)}\}$ for $i \in [1, 2, \dots, L - 2]$ satisfy the following two inequalities:*

$$M_{u,v,k}^{(1)} > A_{\text{adjacency}} + |V| \cdot \sum_{j=1}^L P_j \quad (32)$$

$$M_{u,v,i}^{(2)} > A_{\text{adjacency}} + |V| \cdot \sum_{j=1}^L P_j \quad (33)$$

Then any lowest-energy solution $\mathbf{x}^*$ of $H_{\text{MGC}}^{\text{logarithmic}}(\mathbf{x})$ satisfies properties (i)–(ii) of Theorem III.2.

Proof. Each auxiliary variable constraint contributes a penalty that is zero when satisfied and at least M when violated. The maximum benefit of any single constraint violation is bounded by the full range of the remaining Hamiltonian terms: at most $A_{\text{adjacency}}$ from the adjacency term and $|V| \cdot \sum_{j=1}^L P_j$ from the lexicographic term. Since each M exceeds this bound, no violation can reduce total energy. $\square$

Corollary III.3.1 (Practical Rosenberg Penalties). *A convenient uniform choice using the values of Corollary III.2.1 is:*

$$M_{u,v,k}^{(1)} = M_{u,v,i}^{(2)} = 2 \left((|V| + 1)^L - 1 \right) + 1 + \epsilon \quad (34)$$

for any $\epsilon > 0$.

The bounds presented here are sufficient but not necessary. Alternative reduction techniques such as compressed quadraticization [40] may further reduce auxiliary variable overhead.

F. 2-Qubit Gate Requirements

We derive the CNOT gate count for one QAOA phase-separation layer $e^{-i\gamma H}$ under each encoding. A k -local Pauli- Z phase gadget requires $2(k - 1)$ CNOTs [34]. We set $L = \lceil \log_2 C_{\text{num}} \rceil$ and use the Ising substitution $x_j = (I - Z_j)/2$.

Theorem III.4 (CNOT Gate Count for One-Hot QUBO Encoding). *The one-hot QUBO formulation requires:*

$$N_{\text{CNOT}}^{(\text{one-hot})} = C_{\text{num}} \cdot (|V|(C_{\text{num}} + 1) + 2|E|) \quad (35)$$

CNOT gates.

Proof. Since the formulation is quadratic, each monomial $x_i x_j$ yields one 2-local Ising interaction requiring 2 CNOTs. Counting distinct quadratic monomials: the one-hot constraint contributes $|V| \cdot \binom{C_{\text{num}}}{2}$, the adjacency constraint contributes $|E| \cdot C_{\text{num}}$, and the link constraint contributes $|V| \cdot C_{\text{num}}$ (the count term is purely linear). The total is $\frac{1}{2}|V|C_{\text{num}}(C_{\text{num}} - 1) + C_{\text{num}}(|E| + |V|)$; multiplying by 2 gives the result. $\square$

Theorem III.5 (CNOT Gate Count for Logarithmic HUBO Encoding). *The logarithmic HUBO formulation requires:*

$$N_{\text{CNOT}}^{(\log)} = |E| \cdot (2(L - 1) \cdot 2^L + 2) \quad (36)$$

CNOT gates.

Proof. The lexicographic term is 1-local and contributes zero CNOTs. For each edge, the Ising substitution yields $x_{u,k} \odot x_{v,k} = (1 + Z_{u,k} Z_{v,k})/2$, so the adjacency product becomes $2^{-L} \cdot \prod_{k=1}^L (1 + Z_{u,k} Z_{v,k})$. Expanding gives $\sum_{S \subseteq [L]} \prod_{k \in S} Z_{u,k} Z_{v,k}$, where a subset of size $s \geq 1$ produces a $2s$ -local interaction requiring $2(2s - 1)$ CNOTs. Summing over all nonempty subsets per edge:

$$\begin{aligned} \sum_{s=1}^L \binom{L}{s} \cdot 2(2s - 1) &= 4 \cdot L \cdot 2^{L-1} - 2(2^L - 1) \\ &= 2(L - 1) \cdot 2^L + 2 \end{aligned} \quad (37)$$

using $\sum_{s=0}^L \binom{L}{s} s = L \cdot 2^{L-1}$ and $\sum_{s=0}^L \binom{L}{s} = 2^L$. Multiplying by $|E|$ gives the result. $\square$

Comparison. The one-hot encoding requires $\Theta(C_{\text{num}}^2 \cdot |V| + C_{\text{num}} \cdot |E|)$ CNOTs versus $\Theta(C_{\text{num}} \cdot \log_2 C_{\text{num}} \cdot |E|)$ for the

logarithmic encoding. For sparse graphs ($|E| = \Theta(|V|)$), the ratio scales as $\Theta(C_{\text{num}}/\log_2 C_{\text{num}})$, reflecting a near-exponential gate reduction. Even for dense graphs, the one-hot encoding retains an additional $C_{\text{num}}^2 \cdot |V|$ contribution from the one-hot constraint, ensuring asymptotically fewer 2-qubit gates for the logarithmic encoding whenever $|V| \geq \Omega(\lceil \log_2 C_{\text{num}} \rceil)$.

IV. EXTENSION OF LOGARITHMIC HUBO ENCODING TO GENERAL GRAPH PARTITIONING PROBLEMS

We now cast the general graph partitioning (GP) objective function of Equation (1) in terms of binary variables by assigning $L = \lceil \log_2 |V| \rceil$ bits $\{x_{v,1}, x_{v,2}, \dots, x_{v,L}\} = \{x_{v,k}\}_{k \in [1, \dots, L]}$ to each vertex $v \in V$. Our first step is to recognize that:

$$\mathbf{1}[\ell_u = \ell_v] = \prod_{k=1}^L x_{u,k} \odot x_{v,k} \quad (38)$$

$$\mathbf{1}[\ell_u \neq \ell_v] = 1 - \prod_{k=1}^L x_{u,k} \odot x_{v,k} \quad (39)$$

Thus we represent $\phi_{u,v}(\mathbf{1}[\ell_u = \ell_v])$ in terms of binary variables. Next, instead of directly *counting* the number of distinct labels assigned to the vertices of G , as in $|\{\ell_v : v \in V\}|$, we regularize by way of a lexicographic penalty:

$$H_{\text{lexicographic}}(\mathbf{x}) = \sum_{k=1}^L P_k \sum_{v \in V} x_{v,k} \quad (40)$$

where $P_1 < P_2 < \dots < P_L$ (see Section III-D for strict bounds on $\{P_k\}_{k \in [1, 2, \dots, L]}$). The full HUBO representation of Equation (1) is then given by:

$$H_{\text{GP}}^{\text{logarithmic}}(\mathbf{x}) = H_{\text{partition}}(\mathbf{x}) + H_{\text{lexicographic}}(\mathbf{x}) \quad (41)$$

where:

$$H_{\text{partition}}(\mathbf{x}) = A_{\text{partition}} \cdot \sum_{(u,v) \in E} \left[\alpha_{u,v} \cdot \prod_{k=1}^L (x_{u,k} \odot x_{v,k}) + \beta_{u,v} \cdot \left(1 - \prod_{k=1}^L (x_{u,k} \oplus x_{v,k}) \right) \right] \quad (42)$$

$A_{\text{partition}}$ is a penalty associated with the partition term, and P_k are the lexicographic penalties.

A. Sufficient Conditions for Ensuring Lexicographic Minimization and Feasibility of the Lowest-Energy Solution

We have already established in Section III-D sufficient conditions for guaranteeing that lexicographic minimization is preserved (part (i) of Theorem III.2); the proof applies to all graph partitioning problems of the form presented in Equation (41). Regarding $A_{\text{partition}}$ for such problems, feasibility depends on the structure of the particular problem. For example, in the case of MINIMUM GRAPH COLORING and MINIMUM k -CUT, feasible solutions correspond to valid colorings and valid k -cuts, respectively. In the case of COMMUNITY DETECTION, all solutions are feasible given the absence of hard constraints.

In what follows, we therefore approach determining sufficient conditions on $A_{\text{partition}}$ for graph partitioning problems with hard constraints, assuming only that we can easily separate the solution space into feasible and infeasible solutions. For graph partitioning problems lacking hard constraints, it is sufficient to set $A_{\text{partition}} > 0$.

Definition 3: Feasibility Gap for Graph Partitioning Problems with Hard Constraints

Let $\mathcal{F} \subseteq \{0, 1\}^{n \times L}$ denote the set of feasible binary solutions (those satisfying all hard constraints of the problem). Define:

$$H_{\min}^{\text{feasible}} = \min_{\mathbf{x} \in \mathcal{F}} H_{\text{partition}}(\mathbf{x}) \quad (43)$$

$$H_{\min}^{\text{infeasible}} = \min_{\mathbf{x} \notin \mathcal{F}} H_{\text{partition}}(\mathbf{x}) \quad (44)$$

$\Delta_{\min} = H_{\min}^{\text{infeasible}} - H_{\min}^{\text{feasible}}$ is the *feasibility gap*.

Theorem IV.1 (Sufficient Partition Penalty for Logarithmic Graph Partitioning HUBOs with Hard Constraints). *Suppose the penalties $P_1, \dots, P_L$ and A satisfy:*

$$P_{k+1} > |V| \cdot \sum_{j=1}^k P_j \quad \text{for every } k = 1, \dots, L-1 \quad (45)$$

$$A_{\text{partition}} > \frac{|V| \cdot \sum_{k=1}^L P_k}{\Delta_{\min}} \quad (46)$$

Then any lowest-energy solution $\mathbf{x}^$ of $H_{\text{GP}}^{\text{logarithmic}}(\mathbf{x})$ (Equation (41)) is feasible; i.e., $\mathbf{x}^* \in \mathcal{F}$ (Definition 3).*

Proof. Suppose for contradiction that $\mathbf{x}^*$ is a lowest-energy solution with $\mathbf{x}^* \notin \mathcal{F}$. Since $\mathbf{x}^*$ is infeasible, we have $H_{\text{partition}}(\mathbf{x}^*) \geq H_{\min}^{\text{infeasible}}$. Consider any feasible solution $\tilde{\mathbf{x}} \in \mathcal{F}$. By definition, $H_{\text{partition}}(\tilde{\mathbf{x}}) \geq H_{\min}^{\text{feasible}}$.

The change in total energy from $\mathbf{x}^*$ to $\tilde{\mathbf{x}}$ is:

$$\begin{aligned} H_{\text{GP}}^{\text{logarithmic}}(\tilde{\mathbf{x}}) - H_{\text{GP}}^{\text{logarithmic}}(\mathbf{x}^*) &= A_{\text{partition}} \cdot [H_{\text{partition}}(\tilde{\mathbf{x}}) - H_{\text{partition}}(\mathbf{x}^*)] \\ &\quad + [H_{\text{lex}}(\tilde{\mathbf{x}}) - H_{\text{lex}}(\mathbf{x}^*)] \\ &\leq A_{\text{partition}} \cdot [H_{\min}^{\text{feasible}} - H_{\min}^{\text{infeasible}}] + |V| \cdot \sum_{k=1}^L P_k \\ &= -A_{\text{partition}} \cdot \Delta_{\min} + |V| \cdot \sum_{k=1}^L P_k \end{aligned} \quad (47)$$

where the inequality uses $H_{\text{partition}}(\tilde{\mathbf{x}}) \geq H_{\min}^{\text{feasible}}$ and $H_{\text{partition}}(\mathbf{x}^*) \geq H_{\min}^{\text{infeasible}}$. Recall from earlier that the lexicographic term can change by at most $|V|n \cdot \sum_{k=1}^L P_k$ (as each s_k can change by at most $|V|$).

By Inequality (46), we have:

$$A_{\text{partition}} \cdot \Delta_{\min} > |V| \cdot \sum_{k=1}^L P_k \quad (48)$$

Therefore:

$$H_{\text{GP}}^{\text{logarithmic}}(\tilde{\mathbf{x}}) - H_{\text{GP}}^{\text{logarithmic}}(\mathbf{x}^*) < 0 \quad (49)$$

This implies $H_{\text{GP}}^{\text{logarithmic}}(\tilde{\mathbf{x}}) < H_{\text{GP}}^{\text{logarithmic}}(\mathbf{x}^*)$, contradicting the assumption that $\mathbf{x}^*$ is a lowest-energy solution. We conclude that every lowest-energy solution must be feasible. $\square$

This requires us to use $\Delta_{\min}$ to calculate an appropriate value for $A_{\text{partition}}$, in the general case. Fortunately, as we have seen, in at least one case (MINIMUM GRAPH COLORING) we can quickly compute this value.

V. BENCHMARKING ON QUANTUM HARDWARE

We generated 350 randomly-connected graphs with edge densities in $[0.2, 0.8]$ and $|V| \in [4, 100]$ (available at <https://github.com/pangara/random-connected-graphs/>). Each graph was treated as a MINIMUM GRAPH COLORING instance and solved on a quantum annealer using both the one-hot formulation (Section III-A, penalties per Section III-B) and the quadratized HUBO formulation (Section III-C, penalties per Sections III-D and III-E3). Brooks' bound on chromatic number was pre-computed in linear time to upper-bound qubit requirements per encoding. The code used to conduct benchmarking, analysis, and plotting is available at <https://github.com/noolooop/QuantumGraphColoring>.

A. Quantum Annealing

The D-WAVE Advantage2_system1.11 quantum processing unit (QPU) contains ~4,400 superconducting flux qubits on a Zephyr graph with 20-way connectivity [41]. Problems whose interaction graphs are not subgraphs of this topology required *minor embedding*, where each logical qubit is represented as a chain of ferromagnetically-coupled physical qubits [42], [43]. We used D-WAVE's default `minorminer` algorithm for embedding; embedding time is excluded from Time-to-Solution measurements but the embeddings were recorded for qubit count analysis. The QPU implements the transverse-field Ising Hamiltonian $H(t) = A(t)H_0 + B(t)H_1$, where $A(t)$ decreases from 1 to 0, $B(t)$ increases from 0 to 1, $H_0 = -\sum_i \sigma_x^{(i)}$ is the initial driver Hamiltonian, and $H_1 = -\sum_i h_i \sigma_z^{(i)} - \sum_{i < j} J_{ij} \sigma_z^{(i)} \sigma_z^{(j)}$ is the problem Hamiltonian.

1) *QPU Settings*: All problem instances were solved entirely on-chip without hybrid decomposition. The annealing time was $T_S = 20 \mu\text{s}$ (comparable to the quoted 5–20 μs coherence time), using the default schedule with chain strength set by uniform torque compensation [44]. For each instance and encoding, 1000 runs were executed with thermalization time $\approx 1000 \mu\text{s/run}$ and readout time $\approx (40 + N_q) \mu\text{s/run}$, where N_q is the physical qubit count. HUBO-to-QUBO reduction was performed by `dimod.make_quadratic()` with penalties set per Section III-E3.

2) *Timing*: Per-problem execution time is the sum of programming, annealing, readout, and thermalization times across all runs. Embedding time is treated as negligible (given that embeddings are cacheable *via* hash-table

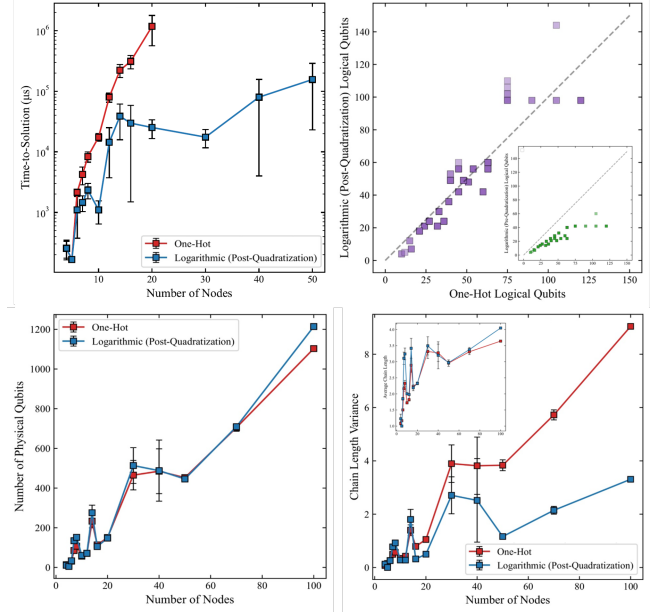


Fig. 2: *Upper left*: TTS as a function of $|V|$. *Upper right*: Post-quadratization logical qubits per encoding; inset: pre-quadratization. Intensity corresponds to the number of problems occupying the same point. *Lower left*: Physical qubits after minor embedding. *Lower right*: Chain length variance; inset: average chain length.

lookup). Exact per-problem timing was retrieved from the `SampleSet.info['timing']` attribute.

3) *Performance Measures*: We evaluate the encodings using three complementary metrics: Time-to-Solution, which captures end-to-end solver performance; survival-time analysis, which enables unbiased aggregation across instances where one or both encodings fail to find the optimum; and qubit counts at each stage of the compilation pipeline.

a) *Time-to-Solution (TTS)*: TTS is the expected wall-clock time to find the lowest-energy feasible solution (identified across both encodings) with probability $\geq 50\%$:

$$\text{TTS} = T_{\text{programming}} + T_{\text{run}} \cdot \frac{\ln(1 - 0.5)}{\ln(1 - p_S)} \quad (50)$$

where p_S is the fraction of $R = 1000$ runs returning the target solution, and $T_{\text{run}} = T_{\text{anneal}} + T_{\text{readout}} + T_{\text{thermalize}}$. Instances with $p_S = 0$ are right-censored and treated using survival-time analysis when aggregating TTS results over problems.

b) *Survival-Time Analysis for Aggregated TTS*: When aggregating TTS across instances grouped by a shared characteristic (e.g., same $|V|$ or edge density), undefined TTS values ($p_S = 0$) cannot be discarded without downward bias or assigned arbitrary large values [45]. We apply Kaplan–Meier survival analysis [46]: computed TTS values enter as uncensored observations and unsolved instances enter as right-censored at $T_{\text{censor}} = R \cdot (T_{\text{anneal}} + T_{\text{readout}} + T_{\text{thermalize}})$. The median TTS is extracted at $\hat{S}(t) = 0.5$ with 95% confidence intervals *via* Greenwood's formula [47]; when the curve does not cross 0.5, the median is reported as a lower bound.

c) *Qubit Counts*: For each encoding and instance we record: (i) pre-quadrization logical qubits, (ii) post-quadrization logical qubits (HUBO only), and (iii) physical qubits after minor embedding.

VI. BENCHMARKING RESULTS

Figure 2 compares the one-hot and logarithmic encodings on the D-WAVE Advantage2_system1.11 QPU across TTS, qubit counts, and chain length statistics.

a) *Time-to-Solution*: Both encodings exhibit increasing TTS with $|V|$ (upper-left panel). The logarithmic encoding achieves substantially lower TTS throughout. While comparable at $|V| = 4$, TTS is approximately one to two orders of magnitude lower by $|V| = 20$. This widening gap suggests that the logarithmic encoding grants progressively greater advantages as problem size grows, likely due to more uniform minor-embedding chains (see below).

b) *Logical and Physical Qubit Counts*: The upper-right inset confirms that pre-quadrization logical qubits lie well below the $y=x$ diagonal for every instance, verifying the expected exponential compression. After quadrization (main scatter), many instances remain below the diagonal, but dense graphs can exceed the one-hot count; this is consistent with Equation (31). The lower-left panel shows that *physical* qubit counts *after* minor embedding are comparable between encodings; the denser logarithmic encoding interaction graph absorbs much of its pre-quadrization advantage after quadrization and embedding.

c) *Chain Length Statistics*: While average chain lengths are similar between encodings (lower-right inset), chain length *variance* is markedly lower for the logarithmic encoding, with the gap widening with $|V|$. We posit this is a key driver of the TTS advantage: non-uniform chains distort the problem Hamiltonian by imposing different effective energy scales on different logical qubits [48]; a single global chain strength cannot simultaneously serve both long and short chains [44]; and longer outlier chains are disproportionately susceptible to thermal noise, seeding chain breaks [48], [49]. The logarithmic encoding’s more uniform chains allow the chain strength to be closer to optimal for all chains simultaneously, preserving problem fidelity throughout the anneal. These results suggest that chain length *uniformity* can be decisive even when physical qubit counts and average chain lengths are comparable.

VII. DISCUSSION AND CONCLUSIONS

We have presented a one-hot QUBO encoding, and a qubit- and gate-efficient HUBO formulation for label-symmetric, pairwise-decomposable graph partitioning problems with minimization of partition count. To the best of our knowledge, this work is the first to approach the optimization of these problems using quantum computing. The HUBO construction encodes each L -valued variable using $\lceil \log_2 L \rceil$ bits and employs a novel lexicographic penalty system that implicitly minimizes the number of distinct labels without dedicated indicator variables. We derived provably sufficient conditions on

all penalty coefficients—including quadrization penalties—guaranteeing feasibility and optimality of the lowest-energy solution. The formulation applies broadly, encompassing problems satisfying the properties listed in Section II-C.

a) *Theoretical Contributions*: The lexicographic penalty system we introduce is novel. It allows our logarithmic encoding of graph partitioning problems to reduce per-vertex bits from L (one-hot) to $\lceil \log_2 L \rceil$, yielding a near-exponential CNOT gate reduction for sparse graphs and asymptotically fewer gates whenever $|V| \geq \Omega(\lceil \log_2 L \rceil)$. To the best of our knowledge, we provide the first sufficient penalty conditions for a logarithmically encoded graph partitioning HUBO, including quadrization penalties. The Rosenberg reduction introduces $|E| \cdot (2L-2)$ auxiliaries; quadrization requires fewer logical qubits than one-hot when the graph is sufficiently sparse (Equation (31)). Gate-based optimizers can execute the HUBO without quadrization.

b) *Experimental Results*: The logarithmic encoding achieves TTS one to two orders of magnitude lower than one-hot on D-WAVE Advantage2_system1.11 for graphs with 20 nodes, with advantage demonstrating growth with problem size. This improvement persists even when post-quadrization logical qubits exceed the one-hot count, indicating that performance gains are not solely attributable to qubit savings. Our qubit analysis confirms that dense instances can exceed the one-hot count after Rosenberg reduction (consistent with Equation (31)), while sparser instances retain substantial savings. Although physical qubit counts are comparable between encodings, considerably lower chain-length variance under logarithmic encoding likely drives its superior performance.

c) *Generality*: The formulation applies to any problem in the class defined in Section IV; the only problem-specific quantity is the feasibility gap $\Delta_{\min}$. It is compatible with quantum annealing, QAOA, VQE, QITE, and GAS.

d) *Limitations and Future Work*: The sufficient penalty conditions may be conservative; tighter bounds could reduce Hamiltonian coefficient dynamic range and improve analog hardware performance [16]. Alternative quadrization strategies could extend the qubit advantage to denser graphs. Empirical extension to larger instances and other problem classes (e.g., minimum k -cut, balanced partitioning) would further establish the approach’s practical scope. Benchmarking using gate-based hardware and algorithms remains to be conducted. Finally, our lexicographic penalization system may be adapted to domain-wall encoding of variables; sufficient penalty analysis and benchmarking on quantum hardware remain.

CONFLICT OF INTEREST STATEMENT

VKM is a co-founder and shareholder of Menten AI, a peptide design company that uses advanced optimization strategies.

REFERENCES

- [1] N. Pirnay, V. Ulitzsch, F. Wilde, J. Eisert, and J.-P. Seifert, “An in-principle super-polynomial quantum advantage for approximating combinatorial optimization problems via computational learning theory,” *Science Advances*, Mar. 2024. [Online]. Available: <https://doi.org/10.1126/sciadv.adj5170>
- [2] T. Hartung and K. Jansen, “Convergence and efficiency proof of quantum imaginary time evolution for bounded order systems,” 2025. [Online]. Available: <https://doi.org/10.48550/arxiv.2506.03014>
- [3] H. Munoz-Bauza and D. Lidar, “Scaling advantage in approximate optimization with quantum annealing,” *Physical Review Letters*, vol. 134, no. 16, Apr. 2025. [Online]. Available: <https://doi.org/10.1103/PhysRevLett.134.160601>
- [4] R. Shaydulin, C. Li, S. Chakrabarti, M. DeCross, D. Herman, N. Kumar, J. Larson, D. Lykov, P. Minssen, Y. Sun, Y. Alexeev, J. M. Dreiling, J. P. Gaebler, T. M. Gatterman, J. A. Gerber, K. Gilmore, D. Gresh, N. Hewitt, C. V. Horst, S. Hu, J. Johansen, M. Matheny, T. Mengle, M. Mills, S. A. Moses, B. Neyenhuis, P. Siegfried, R. Yalovetzky, and M. Pistoia, “Evidence of scaling advantage for the quantum approximate optimization algorithm on a classically intractable problem,” *Science Advances*, vol. 10, no. 22, May 2024. [Online]. Available: <https://doi.org/10.1126/sciadv.adm6761>
- [5] J. Preskill, “Quantum computing in the NISQ era and beyond,” *Quantum*, vol. 2, p. 79, 2018. [Online]. Available: <https://doi.org/10.22331/q-2018-08-06-79>
- [6] A. G. Fowler, M. Mariantoni, J. M. Martinis, and A. N. Cleland, “Surface codes: Towards practical large-scale quantum computation,” *Physical Review A*, vol. 86, no. 3, p. 032324, 2012. [Online]. Available: <https://doi.org/10.1103/PhysRevA.86.032324>
- [7] T. R. Jensen and B. Toft, *Graph Coloring Problems*. Wiley, Dec. 1994. [Online]. Available: <http://dx.doi.org/10.1002/9781118032497>
- [8] S. Fortunato, “Community detection in graphs,” *Physics Reports*, vol. 486, no. 3, pp. 75–174, Feb. 2010. [Online]. Available: <https://doi.org/10.1016/j.physrep.2009.11.002>
- [9] G. Calinescu, *Multitway Cut*. Boston, United States of America: Springer, 2008, pp. 567–569. [Online]. Available: https://doi.org/10.1007/978-0-387-30162-4_253
- [10] T. Kadowaki and H. Nishimori, “Quantum annealing in the transverse Ising model,” *Physical Review E*, vol. 58, no. 5, p. 5355, 1998. [Online]. Available: <https://doi.org/10.1103/PhysRevE.58.5355>
- [11] E. Farhi, J. Goldstone, and S. Gutmann, “A quantum approximate optimization algorithm,” *arXiv:1411.4028*, 2014. [Online]. Available: <https://doi.org/10.48550/arXiv.1411.4028>
- [12] M. Motta, C. Sun, A. T. K. Tan, M. J. O’Rourke, E. Ye, A. J. Minnich, F. G. S. L. Brandão, and G. K.-L. Chan, “Determining eigenstates and thermal states on a quantum computer using quantum imaginary time evolution,” *Nature Physics*, vol. 16, no. 2, p. 205–210, Nov. 2019. [Online]. Available: <http://dx.doi.org/10.1038/s41567-019-0704-4>
- [13] A. Gilliam, S. Woerner, and C. Goniculea, “Grover adaptive search for constrained polynomial binary optimization,” *Quantum*, vol. 5, p. 428, Apr. 2021. [Online]. Available: <https://doi.org/10.22331/q-2021-04-08-428>
- [14] S. P. Jordan, N. Shutty, M. Wootters, A. Zalcman, A. Schmidhuber, R. King, S. V. Isakov, T. Khattar, and R. Babbush, “Optimization by decoded quantum interferometry,” *Nature*, vol. 646, no. 8086, p. 831–836, Oct. 2025. [Online]. Available: <https://doi.org/10.1038/s41586-025-09527-5>
- [15] A. Lucas, “Ising formulations of many NP problems,” *Frontiers in Physics*, vol. 2, Feb. 2014. [Online]. Available: <http://doi.org/10.3389/fphy.2014.00005>
- [16] A. Verma and M. Lewis, “Penalty and partitioning techniques to improve performance of QUBO solvers,” *Discrete Optimization*, vol. 44, p. 100594, May 2022. [Online]. Available: <https://doi.org/10.1016/j.disopt.2020.100594>
- [17] N. Chancellor, “Domain wall encoding of discrete variables for quantum annealing and QAOA,” *Quantum Science and Technology*, vol. 4, no. 4, p. 045004, 2019. [Online]. Available: <https://doi.org/10.1088/2058-9565/ab33c2>
- [18] Z. Tabi, K. H. El-Safty, Z. Kallus, P. Hága, T. Kozsik, A. Glos, and Z. Zimborás, “Quantum optimization for the graph coloring problem with space-efficient embedding,” in *2020 IEEE International Conference on Quantum Computing and Engineering (QCE)*, 2020, pp. 56–62. [Online]. Available: <https://doi.org/10.1109/QCE49297.2020.00018>
- [19] A. Glos, A. Krawiec, and Z. Zimborás, “Space-efficient binary optimization for variational quantum computing,” *npj Quantum Information*, vol. 8, no. 1, 2022. [Online]. Available: <https://doi.org/10.1038/s41534-022-00546-y>
- [20] T. Zaborniak, “Toward quantum computational biomolecular structure prediction,” Ph.D. dissertation, University of Victoria, 2025. [Online]. Available: <https://hdl.handle.net/1828/22736>
- [21] B. Tan, M.-A. Lemonde, S. Thanasilp, J. Tangpanitanon, and D. G. Angelakis, “Qubit-efficient encoding schemes for binary optimisation problems,” *Quantum*, vol. 5, p. 454, May 2021. [Online]. Available: <http://dx.doi.org/10.22331/q-2021-05-04-454>
- [22] E. X. Huber, B. Y. L. Tan, P. R. Griffin, and D. G. Angelakis, “Exponential qubit reduction in optimization for financial transaction settlement,” *EPJ Quantum Technology*, vol. 11, no. 1, Aug. 2024. [Online]. Available: <http://doi.org/10.1140/epjqt/s40507-024-00262-w>
- [23] I. D. Leonidas, A. Dukakis, B. Tan, and D. G. Angelakis, “Qubit efficient quantum algorithms for the vehicle routing problem on noisy intermediate-scale quantum processors,” *Advanced Quantum Technologies*, vol. 7, no. 5, Apr. 2024. [Online]. Available: <http://dx.doi.org/10.1002/qute.202300309>
- [24] M. R. Perelshtein, A. I. Pakhomchik, A. A. Melnikov, M. Podobrii, A. Termanova, I. Kreidich, B. Nuriev, S. Iudin, C. W. Mansell, and V. M. Vinokur, “NISQ-compatible approximate quantum algorithm for unconstrained and constrained discrete optimization,” *Quantum*, vol. 7, p. 1186, Nov. 2023. [Online]. Available: <http://dx.doi.org/10.22331/q-2023-11-21-1186>
- [25] M. Sciorilli, L. Borges, T. L. Patti, D. García-Martín, G. Camilo, A. Anandkumar, and L. Aolita, “Towards large-scale quantum optimization solvers with few qubits,” *Nature Communications*, vol. 16, no. 1, Jan. 2025. [Online]. Available: <http://doi.org/10.1038/s41467-024-55346-z>
- [26] T. Shirai and N. Togawa, “Compressed space quantum approximate optimization algorithm for constrained combinatorial optimization,” *IEEE Transactions on Quantum Engineering*, vol. 6, pp. 1–14, 2025.
- [27] Y. Sano, K. Mitarai, N. Yamamoto, and N. Ishikawa, “Accelerating grover adaptive search: Qubit and gate count reduction strategies with higher order formulations,” *IEEE Transactions on Quantum Engineering*, vol. 5, pp. 1–12, 2024. [Online]. Available: <https://doi.org/10.1109/TQE.2024.3393437>
- [28] Y. Chatterjee, E. Bourreau, and M. J. Rančić, “Solving various np-hard problems using exponentially fewer qubits on a quantum computer,” *Physical Review A*, vol. 109, no. 5, May 2024. [Online]. Available: <http://doi.org/10.1103/PhysRevA.109.052441>
- [29] J. Berwald, N. Chancellor, and R. Dridi, “Understanding domain-wall encoding theoretically and experimentally,” *Philosophical Transactions of the Royal Society A*, vol. 381, no. 20210410, 2022. [Online]. Available: <https://doi.org/10.1098/rsta.2021.0410>
- [30] J. Chen, T. Stollenwerk, and N. Chancellor, “Performance of domain-wall encoding for quantum annealing,” *IEEE Transactions on Quantum Engineering*, vol. 2, pp. 1–14, 2021. [Online]. Available: <https://doi.org/10.1109/TQE.2021.3094280>
- [31] M. Cerezo, A. Arrasmith, R. Babbush, S. C. Benjamin, S. Endo, K. Fujii, J. R. McClean, K. Mitarai, X. Yuan, L. Cincio, and P. J. Coles, “Variational quantum algorithms,” *Nature Reviews Physics*, vol. 3, no. 9, p. 625–644, Aug. 2021. [Online]. Available: <http://dx.doi.org/10.1038/s42254-021-00348-9>
- [32] H. Ominato, T. Ohyama, and K. Yamaguchi, “Grover adaptive search with fewer queries,” *IEEE Access*, vol. 12, p. 74619–74632, 2024. [Online]. Available: <https://doi.org/10.1109/ACCESS.2024.3403200>
- [33] C. C. McGeoch, *Adiabatic Quantum Computation and Quantum Annealing: Theory and Practice*. Springer, 2014. [Online]. Available: <http://dx.doi.org/10.1007/978-3-031-02518-1>
- [34] A. Cowtan, S. Dilkes, R. Duncan, W. Simmons, and S. Sivarajah, “Phase gadget synthesis for shallow circuits,” *arXiv preprint arXiv:1906.01734*, 2019. [Online]. Available: <https://arxiv.org/abs/1906.01734>
- [35] S. McArdle, X. Yuan, and S. C. Benjamin, “Variational quantum simulation of imaginary time evolution with applications in chemistry and beyond,” *npj Quantum Information*, vol. 5, no. 1, p. 75, 2019. [Online]. Available: <https://doi.org/10.1038/s41534-019-0187-2>
- [36] L. K. Grover, “A fast quantum mechanical algorithm for database search,” in *Proceedings of the 28th Annual ACM Symposium on Theory of Computing*. Association for Computing Machinery, 1996, p. 212–219. [Online]. Available: <https://doi.org/10.1145/237814.237866>

-
- [37] S. Morita and H. Nishimori, "Mathematical foundation of quantum annealing," *Journal of Mathematical Physics*, vol. 49, no. 12, Dec. 2008. [Online]. Available: <http://dx.doi.org/10.1063/1.2995837>
- [38] R. L. Brooks, "On colouring the nodes of a network," *Mathematical Proceedings of the Cambridge Philosophical Society*, vol. 37, no. 2, p. 194–197, Apr. 1941. [Online]. Available: <http://dx.doi.org/10.1017/S030500410002168X>
- [39] I. G. Rosenberg, "Brèves communications. 0-1 optimization and non-linear programming," *Revue Française D'Automatique, Informatique, Recherche Opérationnelle*, vol. 6, no. 2, pp. 95–97, 1972. [Online]. Available: <https://doi.org/10.1051/ro/197206V200951>
- [40] A. Mandal, A. Roy, S. Upadhyay, and H. Ushijima-Mwesigwa, "Compressed quadratization of higher order binary optimization problems," in *Proceedings of the 17th ACM International Conference on Computing Frontiers*. Association for Computing Machinery, May 2020, p. 126–131. [Online]. Available: <http://doi.org/10.1145/3387902.3392627>
- [41] K. Boothby, A. D. King, and J. Raymond, "Zephyr topology of D-Wave quantum processors," D-Wave Systems Inc., White Paper 14-1056A-A, September 2021, D-Wave Technical Report Series. [Online]. Available: https://www.dwavesys.com/media/2uznec4s/14-1056a-a_zephyr_topology_of_d-wave_quantum_processors.pdf
- [42] J. P. Pinilla Gomez, "Context-aware minor-embedding for quantum annealing processors," Ph.D. dissertation, University of British Columbia, 2024. [Online]. Available: <https://hdl.handle.net/2429/88270>
- [43] J. Cai, W. G. Macready, and A. Roy, "A practical heuristic for finding graph minors," 2014. [Online]. Available: <https://arxiv.org/abs/1406.2741>
- [44] V. Gilbert and S. Louise, *Quantum Annealers Chain Strengths: A Simple Heuristic to Set Them All*. Springer, 2024, p. 292–306. [Online]. Available: https://doi.org/10.1007/978-3-031-63778-0_21
- [45] M. Gagliolo and C. Legrand, *Algorithm Survival Analysis*. Springer, 2010, p. 161–184. [Online]. Available: https://doi.org/10.1007/978-3-642-02538-9_7
- [46] E. L. Kaplan and P. Meier, "Nonparametric estimation from incomplete observations," *Journal of the American Statistical Association*, vol. 53, no. 282, p. 457–481, Jun. 1958. [Online]. Available: <https://doi.org/10.1080/01621459.1958.10501452>
- [47] O. S. Miettinen, "Survival analysis: Up from kaplan–meier–greenwood," *European Journal of Epidemiology*, vol. 23, no. 9, p. 585–592, Sep. 2008. [Online]. Available: <https://doi.org/10.1007/s10654-008-9278-7>
- [48] E. Pelofske, "Comparing three generations of D-Wave quantum annealers for minor embedded combinatorial optimization problems," *Quantum Science and Technology*, vol. 10, no. 2, p. 025025, 2025. [Online]. Available: <https://doi.org/10.1088/2058-9565/adb029>
- [49] S.-G. Jeong, M. D. Cong, D.-I. Noh, Q.-V. Pham, and W.-J. Hwang, "Embedding-aware noise modeling of quantum annealing," 2025. [Online]. Available: <https://doi.org/10.48550/arXiv.2510.04594>