

AutoQResearch: LLM-Guided Closed-Loop Policy Search for Adaptive Variational Quantum Optimization

Monit SHARMA

School of Computing and Information Systems
Singapore Management University
Singapore
monitsharma@smu.edu.sg

Hoong Chuin LAU[†]

School of Computing and Information Systems
Singapore Management University
Singapore
hclau@smu.edu.sg

Abstract—Configuring variational quantum algorithms for combinatorial optimization remains a difficult and largely expert-driven process, requiring coordinated choices over solver family, ansatz, objective, optimizer, encoding, and fallback logic. We present *AutoQResearch*, an LLM-guided closed-loop experimentation framework that casts this task as sequential policy search over a curated quantum-solver design space. Instead of searching for a single static configuration, the framework searches for adaptive solver-control policies that condition future decisions on diagnostics from earlier attempts, including feasibility, optimality gap, convergence stagnation, and sampling concentration.

The system operates through a structured and auditable workflow: an LLM agent edits a small policy surface under a fixed evaluation harness, candidate policies are first screened using cheap scout evaluations, and only the strongest candidates are promoted to full confirmation. The code and experiment artifacts are publicly released to support reproduction of the search traces, plots, and policy checkpoints.¹ This enables controlled autonomous exploration while guarding against proxy overfitting and unstable policy selection.

We evaluate the framework on two combinatorial optimization settings with different structural characteristics: Maximum Independent Set (MIS) and the Capacitated Vehicle Routing Problem (CVRP). On MIS instances from 16 to 64 vertices, the discovered policies substantially outperform the static baseline and reveal clear scale-dependent solver behavior: CVaR objectives are most effective at small scale, warm-start QAOA transfers well at 16 nodes but collapses at 32, and QRAO-based qubit compression provides the most effective explored scaling path. On CVRP curricula from 8- to 12-customer instances and a held-out E-n13-k4 benchmark, the framework discovers policy adaptations involving sampling budget, penalty design, and hybrid feasibility-repair protocols, yielding feasible high-quality solutions on held-out instances.

Beyond the problem-specific results, the main methodological finding is that staged confirmation is essential: cheap proxy evaluations can materially misestimate policy quality and even invert candidate rankings. Overall, the paper positions AutoQResearch as a benchmarked quantum-GenAI co-design workflow for autonomous solver discovery in variational quantum optimization.

Index Terms—Quantum optimization, Large Language Models, Sequential policy search, Quantum-GenAI co-design, Variational quantum algorithms, Benchmarking

[†]Corresponding Author

¹Code and artifacts: <https://github.com/SMU-Quantum/autoqresearch>

I. INTRODUCTION

Recent interest in quantum-generative AI co-design has highlighted the need for closed-loop workflows in which generative models do more than summarize results or assist with coding: they must propose candidates, interact with computational backends, interpret diagnostic feedback, and refine future actions under an auditable evaluation protocol. Such workflows are especially relevant in variational quantum optimization, where performance depends on a large number of interacting design choices and where useful feedback is naturally produced after each solver attempt.

Variational quantum algorithms (VQAs), including the Variational Quantum Eigensolver (VQE) [1], the Quantum Approximate Optimization Algorithm (QAOA) [2], and related variants such as CVaR-VQE [3], Warm-Start QAOA [4], Multi-Angle QAOA [5], Quantum Random Access Optimization (QRAO) [6], [7], and Pauli Correlation Encoding (PCE) [8], [9], expose a rich and highly coupled solver design space. Practical performance depends jointly on solver family, ansatz architecture, depth, classical optimizer, measurement objective, encoding strategy, compression ratio, and fallback behavior. These choices interact with problem structure, instance scale, and resource constraints in ways that are difficult to predict analytically, making solver configuration a major practical bottleneck.

Most existing tuning approaches, such as grid search, random search, and Bayesian optimization [10], treat solver design as a static hyperparameter-selection problem. In contrast, quantum optimization is inherently sequential and diagnostic-rich: each attempt produces information about feasibility, objective quality, convergence behavior, and sample concentration that can inform the next decision. This suggests that the appropriate object of optimization is not merely a single fixed configuration, but an adaptive decision policy that maps observed solver diagnostics to subsequent actions.

In this paper, we introduce *AutoQResearch*, an LLM-guided closed-loop experimentation framework that casts variational quantum algorithm configuration as sequential policy search

over a curated and auditable solver design space. Rather than allowing unrestricted code generation, the framework restricts the agent to editing a small policy surface under a fixed evaluation harness. Candidate policies are proposed, executed, screened using cheap scout evaluations, and then promoted to full confirmation only if they remain competitive under broader testing. In this sense, the system functions as a quantum–GenAI co-design workflow: the generative model proposes adaptive solver-control logic, and the quantum optimization stack validates, refines, or rejects it through measured execution outcomes.

We evaluate the framework on two combinatorial optimization settings with different structural characteristics. The first is Maximum Independent Set (MIS), which provides a clean constrained QUBO benchmark for studying solver-family switching, objective selection, and compression-based scaling. The second is a decomposed Capacitated Vehicle Routing Problem (CVRP) workflow, which introduces a richer decision pipeline involving assignment feasibility, penalty design, sampling-budget allocation, and repair-aware evaluation. This dual evaluation allows us to study not only whether the agent can discover effective policies, but also whether the same closed-loop search framework remains useful across qualitatively different quantum optimization regimes.

A. Why Adaptive Policies Instead of Static Configurations?

A static solver configuration cannot express conditional logic of the form: “if the current attempt is feasible but stagnant, change the measurement objective,” or “if the current family loses concentration at larger scale, switch to a compressed encoding and use a fallback rule.” Yet these are precisely the kinds of responses that arise in practice during variational quantum optimization. In our experiments, different failure modes required different interventions, including changes in measurement strategy, solver family, compression ratio, penalty design, and sampling budget. This motivates viewing the design problem as sequential policy search rather than static hyperparameter tuning.

B. LLM Guidance Within a Structured Search Workflow

Recent work on LLM-assisted scientific discovery suggests that language models can support iterative experimental workflows when they are embedded within structured execution environments [11]–[14]. Our setting adopts this perspective, but under a deliberately restricted design. The LLM is not asked to invent new quantum algorithms from scratch. Instead, it acts as a sequential experiment planner over a curated solver space, editing a small policy surface while operating under a fixed evaluation harness and explicit promotion rules. This restriction is intentional: it makes the search process auditable, reproducible, and scientifically interpretable.

A natural question is whether the proposed framework offers advantages over classical search strategies such as Bayesian optimization, or bandit-based controllers over the same policy space. These methods are effective when the search space is low-dimensional, fixed, and smoothly parameterized. In

contrast, the policy space in AutoQResearch is *structured, discrete, and programmatic*: it includes solver-family switching, objective selection, conditional fallback logic, and workflow-level transformations that depend on interpreting heterogeneous diagnostic signals. This space is not naturally amenable to continuous optimization or simple surrogate modeling. The role of the LLM in this setting is not merely to sample configurations, but to perform *diagnosis-driven search*, proposing targeted, semantically meaningful policy edits conditioned on observed failure modes (e.g., stagnation, infeasibility, or concentration collapse). This enables rapid navigation of a combinatorial design space that would otherwise require extensive manual engineering or prohibitively large numbers of blind evaluations.

Conceptually, AutoQResearch sits at the intersection of three classical lineages: automated algorithm configuration and AutoML, in which solver settings are tuned by random search or Bayesian optimization [10]; per-instance algorithm selection and solver portfolios, which map instance features to a chosen solver; and agentic experimentation systems, in which an LLM plans and executes iterative experiments under tool feedback [11]–[14]. Our contribution relative to the first two is that the search object is an *adaptive control policy* over a discrete, programmatic space—including solver-family switches and conditional fallback logic—rather than a point in a fixed continuous configuration space; relative to the third, the agent is deliberately confined to a small typed policy surface behind a fixed harness, trading open-ended autonomy for auditability and reproducibility.

C. Contributions

We make the following contributions:

- **A closed-loop quantum–GenAI framework for adaptive solver discovery.** We introduce *AutoQResearch*, an LLM-guided experimentation framework that casts variational quantum solver design as sequential policy search over a curated and auditable action space, rather than as static hyperparameter selection.
- **A structured and reproducible agent interface for quantum optimization.** The framework restricts the agent to a small editable policy surface under a fixed evaluation harness, enabling autonomous yet controlled exploration of solver-family choice, objective selection, circuit design, compression strategy, sampling budget, and fallback logic.
- **A staged evaluation methodology for reliable autonomous search.** We propose a scout–promote–confirm protocol with replay guardrails, showing that cheap proxy evaluations can materially misestimate policy quality and even invert candidate rankings. This provides a practical evaluation methodology for closed-loop quantum–GenAI workflows.
- **Cross-problem evidence on adaptive policy discovery.** We evaluate the framework on two structurally different optimization settings: Maximum Independent Set (MIS)

and a decomposed Capacitated Vehicle Routing Problem (CVRP) workflow. Across these settings, the agent discovers nontrivial problem- and scale-dependent policy adaptations, including objective switching, solver-family changes, compression-based scaling, penalty redesign, and sampling-budget control.

- **Open and auditable research artifacts.** We release the framework, benchmark instances, policy checkpoints, experiment logs, and analysis scripts to support reproducibility and future work on autonomous quantum optimization workflows.

II. PROBLEM FORMULATION

AutoQResearch is designed to search over adaptive solver-control policies for variational quantum optimization workflows. In this paper, we evaluate the framework on two combinatorial optimization settings with different structural properties: Maximum Independent Set (MIS) and a decomposed Capacitated Vehicle Routing Problem (CVRP) workflow. The purpose of using both is not to introduce new mathematical formulations for these problems, but to test whether the same closed-loop quantum-GenAI search procedure can discover effective policies across distinct optimization regimes.

A. Maximum Independent Set

The Maximum Independent Set (MIS) [15] problem on an undirected graph $G = (V, E)$ seeks the largest subset of vertices such that no two selected vertices are adjacent:

$$\begin{aligned} \max_{x \in \{0,1\}^{|V|}} \quad & \sum_{i \in V} x_i \\ \text{subject to} \quad & x_i + x_j \leq 1, \quad \forall (i, j) \in E. \end{aligned}$$

MIS is NP-hard and is a standard benchmark for variational quantum optimization because feasibility itself becomes nontrivial once adjacency constraints are encoded through soft penalties. In our framework, the constrained problem is converted into a QUBO of the form

$$\min_x \left(- \sum_i x_i + P \sum_{(i,j) \in E} x_i x_j \right),$$

where $P > 0$ is a penalty coefficient. Since each selected vertex contributes reward 1 while each violated edge must be discouraged, feasibility requires $P > 1$; the penalty is auto-derived by the QUBO conversion so that any single constraint violation strictly outweighs the maximum achievable objective reward, which for unit-weight MIS yields $P \geq 2$. This coefficient is exposed to the agent as a tunable degree of freedom (via the `penalty` field), but on the reported runs the agent left it at the auto-derived value. The corresponding Ising Hamiltonian is then solved using one of the supported quantum solver families.

B. Decomposed CVRP Workflow

The Capacitated Vehicle Routing Problem (CVRP) [16] requires a fleet of capacitated vehicles to serve customer demands from a depot at minimum travel cost. Rather than treating CVRP as a single monolithic quantum optimization problem, our experiments use a decomposed workflow [17], [18] in which a quantum solver is applied to an intermediate assignment subproblem and a classical routing procedure evaluates the resulting clusters.

More precisely, each CVRP instance is first transformed into a seed-based customer-to-vehicle assignment problem inspired by Fisher-Jaikumar-style decomposition [19]. This assignment stage determines how customers are partitioned across vehicles subject to capacity considerations. The resulting assignment problem is then encoded as a QUBO and solved by the candidate quantum policy. Given a decoded assignment, route costs are computed by a fixed downstream routing stage, allowing the overall pipeline to be scored by final CVRP solution quality.

This decomposed setting is useful for AutoQResearch because it exposes a different policy-search regime from MIS. In addition to solver-family and objective choices, performance depends on assignment feasibility, penalty design, seed selection, sampling budget, and repair behavior. As a result, CVRP provides a complementary test of whether the agent can adapt its decisions in a richer hybrid quantum-classical workflow.

A key adaptation discovered on this workflow concerns how the vehicle-capacity constraint is encoded. Writing $s_v = \sum_c d_c y_{cv} - Q_v$ for the load surplus of vehicle v (with customer demands d_c , assignment variables y_{cv} , and capacity Q_v), the initial encoding uses a symmetric quadratic slack penalty λs_v^2 that charges both under- and over-capacity deviations. The *tilted* penalty replaces this with an asymmetric, one-sided form that charges only capacity *overflow*, $\lambda [\max(0, s_v)]^2$, optionally with a stronger multiplier on the overflow branch. This removes the spurious pressure that the symmetric form places on legitimately under-full vehicles, enlarging the feasible region sampled by the quantum solver. The penalty weight λ is scaled relative to the assignment reward; exact coefficients for each stage are provided in the released configuration.

C. Evaluation Objective

For both problem settings, the search target is solution quality measured relative to a classical reference. On MIS, we use per-instance optimality gap relative to the exact maximum independent set size, assigning gap 1.0 to infeasible outputs. On CVRP, we use route-cost gap relative to the benchmark reference solution generated by the fixed evaluation pipeline, again treating infeasible decoded assignments as worst case. Candidate policies are compared through suite-level average gap over the relevant curriculum stage, and this quantity is the optimization target throughout the search.

To avoid ambiguity, we state explicitly where feasibility is evaluated, since it plays several roles. (i) As an *agent-facing diagnostic*, per-attempt feasibility and feasibility rate are reported to the controller so it can react to infeasibility, but they

never directly enter the objective. (ii) In the *MIS gap*, the best sampled bitstring is checked against the adjacency constraints; an infeasible best sample yields gap 1.0, so feasibility is folded into the single reported quantity. (iii) In the *CVRP pipeline*, feasibility is checked on the decoded assignment; a bounded classical repair step may restore capacity feasibility before routing, and only the repaired feasible assignment is routed and scored (an assignment that cannot be repaired is scored as worst case). In all cases the number that drives keep/revert and that we report is the feasibility-aware suite-average gap; feasibility is a gate on that gap, not a separate reward term.

III. METHODOLOGY

A. Closed-Loop Search Workflow

AutoQResearch treats variational quantum solver design as a closed-loop sequential search problem. At each iteration, an LLM agent proposes edits to a restricted policy surface that controls how a solver is selected, configured, and adapted across attempts. The edited policy is then executed by a fixed evaluation harness on the current benchmark stage, which returns quantitative diagnostics including feasibility, solution quality, and sampling behavior. These outcomes are used both to score the candidate policy and to inform the next round of policy edits.

This design deliberately separates *proposal* from *validation*. The LLM does not directly decide which candidate is accepted; rather, it proposes a policy, the quantum optimization stack evaluates it under fixed rules, and the measured results determine whether the candidate is retained, discarded, or promoted for broader confirmation. In this sense, the framework implements a closed-loop quantum-GenAI workflow in which the generative model proposes adaptive solver-control logic and the solver backend validates, refines, or rejects it.

B. Policy Interface and Observation Signals

The agent operates over a small editable policy surface implemented through four functions: selecting the initial solver family, constructing a base configuration, deciding whether another attempt should be executed, and adapting the policy after observing previous outcomes. This interface is expressive enough to represent both static configurations and conditional controllers with fallback logic, while remaining compact and auditable.

After each attempt, the controller receives a structured outcome summary containing the optimization target (gap), feasibility information, and a small set of diagnostic signals used throughout the search. In the MIS setting, the most relevant signals include raw feasibility, feasibility rate, convergence stagnation, and the probability mass of the most likely sampled bitstring. In the CVRP workflow, the same interface is used, but the dominant signals additionally reflect assignment feasibility and downstream routed solution quality. These observations allow the agent to condition future actions on failure modes such as stagnation, infeasibility, or concentration collapse.

C. Agent Configuration and Policy Space

a) *LLM and prompting.*: We use **GPT-5.3-Codex** with identical instructions for both the MIS and CVRP studies. The complete natural-language prompt is the released instruction file `program.md`; it fixes the objective (minimize suite-average gap, lower is better), the four editable policy functions, the available degrees of freedom, and a mandatory protocol (at least fifteen search iterations, the seed treated as a verification-only control, and classical local search disabled). At each iteration the model receives the current policy source together with the structured diagnostic summary of the previous attempt, and it may edit only `experiment.py` (the four policy functions) and its research log `agent_journal.md`. No fine-tuning is performed and no gradient signal is passed to the model: the only feedback is the textual diagnostic summary and the keep/revert decision returned by the harness. Cross-stage memory is provided by curriculum carry-forward—the best confirmed snapshot of a stage is restored before the next stage begins—and by the agent’s own journal, rather than by any hidden model state. The prompt and protocol are held constant across the two problem settings; only the benchmark suites differ.

b) *Policy space and how it was designed.*: The editable action space is discrete, programmatic, and deliberately human-curated so that every proposal is auditable. It contains four solver families (VQE, QAOA, PCE, QRAO); per-family choices of `ansatz` (`real_amplitudes`, `efficient_su2`, `pauli_two_design`, `brickwork`, or a custom builder), circuit depth/repetitions, entanglement pattern, classical optimizer and its budget, measurement objective (expectation or CVaR with tunable α), estimator/sampler shot counts, and the QUBO penalty; the QAOA variant (standard, warm-start with mixing ε , or multi-angle); and the QRAO compression ratio (1:1, 2:1, 3:1) with semideterministic or magic rounding. Crucially, the surface also exposes the *control flow*: a stopping rule and an adaptation rule that may change any of the above *between attempts on a single instance*, conditioned on observed diagnostics. The space was designed by the standard degrees of freedom of the included solver families; the guiding principle for admitting an action was that it should let the agent respond to a diagnosable failure mode (poor concentration, low feasibility, optimizer stagnation, runtime blow-up, or size-specific failure). Two exclusions are enforced by design: classical local search is disabled (`pce_local_search` and `final_local_search` fixed to `False`) so that families compete purely on quantum output, and the random seed is fixed ($= 17$) and explicitly forbidden as a tuning knob so that improvements reflect algorithmic change rather than a favorable draw. Even restricting to discrete choices and ignoring the conditional control flow, a single attempt admits on the order of 10^3 – 10^4 configurations; because an adaptive policy is a branching program over such attempts, the effective search space is not enumerable by grid or random search at the budgets used here, which is the sense in which the agent performs diagnosis-driven search rather than enumeration.

c) *Reliability and guardrails.*: Because the agent edits only a small typed policy surface behind a fixed harness, a proposal cannot alter the evaluation or the metric. On the MIS trajectory analyzed here the agent issued 17 policy proposals (in addition to the recorded baseline); all 17 executed to completion with no runtime error, 9 were kept and 8 were reverted, and every keep/revert decision was made by the harness on the measured suite metric under a strict-improvement rule with a 0.02 dev/replay regression tolerance. Reverts restore the previous git snapshot, so a dominated or self-contradictory edit cannot persist. In this restricted setting we observed no executable-but-invalid “hallucinated” policies; the operative failure mode is not malformed code but proposals that fail to improve the metric, which the guardrails reject automatically. We regard this containment as a feature of the restricted-surface design rather than evidence that the underlying model never errs.

D. Staged Evaluation Protocol

Evaluating every candidate policy on the full benchmark at each iteration would be unnecessarily expensive and would make the search unstable. We therefore use a three-stage evaluation protocol.

a) *Scout.*: A candidate policy is first evaluated on a cheap proxy consisting of a small subset of instances from the current stage, together with replay checks on earlier stages when required. This provides rapid feedback for search.

b) *Promote.*: Only the strongest scout candidates are re-evaluated on the full stage benchmark. This filters out candidates that overfit the proxy or benefit from favorable noise.

c) *Confirm and carry forward.*: The best promoted candidate becomes the locked controller for the current stage and is then carried forward to the next stage in the curriculum. Replay guardrails are applied so that improvements at a new stage do not come at the cost of large regressions on earlier validated stages.

This protocol is a central methodological component of the framework. In our experiments, cheap proxy evaluations were sometimes overly optimistic and could even invert candidate rankings, making explicit confirmation necessary for reliable autonomous search.

E. Benchmarks and Solver Families

We evaluate the framework on curriculum-based benchmark ladders for MIS and CVRP. For MIS [9], [15], the curriculum spans graph instances from 16 to 64 vertices. For CVRP [17], [20], the curriculum progresses from 8-customer to 12-customer decomposed assignment-routing instances, followed by a held-out E-n13-k4 benchmark. At each stage, the search objective is the suite-average gap over the active benchmark split.

The available solver families are drawn from a curated quantum optimization design space including VQE, QAOA, QRAO, and PCE, together with solver-specific choices such

as ansatz type, circuit depth, optimizer, measurement objective, compression ratio, rounding method, and sampling budget. In the CVRP workflow, the search space also includes decomposition-sensitive controls such as seed selection, penalty design, and repair-aware sampling decisions. All candidates are executed under a fixed harness so that policy comparisons remain controlled and reproducible.

a) *Instances and splits.*: Each curriculum stage has an explicit split. Search is driven by a cheap *scout* proxy (two instances per stage); a stage winner is declared only on the fuller *confirm* suite (five instances at 16 and 32 nodes); and earlier stages are re-evaluated as *replay* guardrails whose gap may not worsen by more than 0.02. The 48-node stage uses a retained sparse instance, and the 64-node instance is *held out*: it is never used for keep/discard and is scored only once the final policy is locked. MIS instances are drawn from the benchmark set of [9], [15], and the held-out CVRP instance is E-n13-k4 from CVRPLIB [20]. Exact per-stage instance membership, counts, and sources are released with the artifact.

b) *Simulation backend.*: All policy search and confirmation runs use *ideal, noiseless* simulation: a matrix-product-state / statevector backend (harness mode *ideal_mps*, with *statevector* as an alias) with fixed estimator and sampler shot budgets. Noisy-simulator and hardware backends are supported by the same harness but are reserved for the hardware validation of Section V. Policies are therefore *discovered under idealized simulation*, isolating algorithmic signal from device noise; the hardware runs then test whether the discovered policies survive transfer to real devices rather than being tuned to a particular noise model. Unless stated otherwise the seed is fixed at 17; a post-lock robustness protocol re-evaluates the final held-out policy over five seeds (17, 23, 29, 31, 37).

IV. RESULTS

We report results on two problem settings: Maximum Independent Set (MIS) and a decomposed Capacitated Vehicle Routing Problem (CVRP) workflow. In both settings, the objective of the search is to minimize suite-average gap under a staged scout–promote–confirm protocol. The results are presented in a compact form to highlight two complementary aspects of the framework: *search dynamics*, shown through stage-wise trajectory plots, and *validated outcomes*, shown through curriculum-level summary tables and overview figures.

A. Case Study I: Maximum Independent Set

Table I summarizes the final MIS controllers discovered across the curriculum. At 16 nodes, the strongest confirmed controller is warm-start QAOA with CVaR, which improves the confirmed stage gap to 0.250 from a substantially weaker static baseline. At 32 nodes, the search shifts away from direct QAOA transfer and identifies QRAO with 3:1 compression and magic rounding as the strongest confirmed controller, achieving a gap of 0.247. In the larger-size regime, the locked controller becomes adaptive: a semideterministic QRAO policy

with fallback from 3:1 to 2:1 compression yields a confirmed gap of 0.533 on the retained 48-node instance and transfers to the unseen 64-node held-out instance with gap 0.550. These results show that the discovered controller is not uniform across scale; instead, the effective policy changes from CVaR-enhanced QAOA at small scale to qubit-compressed QRAO variants at larger scale.

Figure 1 shows the stage-local search trajectories. The 16-node stage begins with a feasible but weak VQE baseline, after which the search discovers that changing the objective is more valuable than increasing circuit complexity. Warm-start QAOA with CVaR then becomes the confirmed winner. At 32 nodes, the same family no longer transfers, and the search moves toward QRAO-based compressed controllers. At 48 nodes, no static single-shot strategy remains reliable, and the final controller uses conditional fallback logic. This figure therefore illustrates the central mechanism of AutoQResearch: the agent does not simply optimize a single configuration, but adapts its strategy as the dominant failure mode changes with scale.

Figure 2 summarizes the relationship between proxy and confirmed performance. Two patterns are clear. First, scout results can be materially optimistic relative to confirmed results. Second, the identity of the strongest proxy candidate need not match the strongest confirmed policy, especially at intermediate scales. This validates the need for the promotion step in the closed-loop search workflow and supports our claim that reliable autonomous experimentation requires staged confirmation rather than proxy-only search.

B. Staged-Confirmation Ablation

The claim that staged confirmation is *necessary* rather than merely convenient can be tested directly from the promotion logs, which record both the cheap scout-proxy gap and the full-suite confirmed gap for every promoted candidate. Table II contrasts, within one promotion round at each MIS stage, the policy a *scout-only* rule would ship (the scout-argmin) against the policy selected under confirmation (the confirm-argmin).

At 16 nodes the two-instance scout proxy saturates: the scout-best candidate reaches gap 0.000 on the proxy yet confirms at 0.400 on the full five-instance suite, while a candidate the proxy ranked *worse* (scout 0.063) confirms at 0.250. A scout-only rule would therefore ship a policy 0.150 worse than the confirmed choice. At 32 nodes the inversion is sharper: the confirm-best candidate (confirmed gap 0.247) was ranked *last of three* by the scout proxy (scout gap 0.667), so any top-1 scout rule would have *discarded* the eventual winner and shipped a policy with confirmed gap 0.292. In both rounds the proxy ordering does not match the confirmed ordering—exactly the failure the promote/confirm stage exists to catch. Throughout the 32-node search the 16-node replay guardrail held at gap 0.025, confirming that the advance did not silently regress the earlier stage. For context on cost, the full MIS search consumed 17 policy proposals and roughly 4.1 hours of cumulative simulation across scout, confirm, and replay evaluations, with zero execution failures. These

figures give a concrete, log-derived basis for the paper’s central methodological claim; a matched-budget head-to-head against non-LLM search strategies over the same surface remains future work (Section VI).

C. Case Study II: Decomposed CVRP Workflow

Table III summarizes the final CVRP results. Unlike MIS, where solver-family switching is the dominant adaptation axis, the CVRP workflow reveals a different regime: performance depends strongly on assignment feasibility, penalty design, and sampling budget. On the 8-customer stage, the search improves the confirmed gap from a baseline scout gap of 0.112 to a confirmed stage gap of 0.095. On the 10-customer stage, the strongest confirmed policy achieves a gap of 0.047, driven by the transition from hard-slack capacity handling to a tilted penalty formulation [17] together with higher final sampling. On the retained 12-customer run, the hybrid protocol yields a feasible result with gap 0.010. Finally, on the held-out E-n13-k4 benchmark, the locked policy attains a feasible final gap of 0.139. These results show that the same AutoQResearch framework remains effective in a richer hybrid routing pipeline, but the useful interventions differ from those observed for MIS.

Figure 3 shows the CVRP search trajectory. At 8 customers, the early search establishes that pure solver-family changes are less important than recovering rare feasible assignment samples. At 10 customers, the dominant improvement comes from changing the underlying assignment construction, specifically the move to tilted capacity penalties, which makes both training instances feasible while preserving replay performance. The retained 12-customer run and the held-out E-n13 benchmark then demonstrate that the resulting policy is not confined to the earlier curriculum stages. In contrast to the MIS study, where compression and family-switching dominate the larger-size regime, the CVRP study highlights the role of workflow-level decisions such as penalty redesign, replay-aware selection, and feasibility-repair-aware evaluation.

Figure 4 summarizes the curriculum-level outcomes. The most important point is that the scout and confirmed stage results align more closely than in MIS once the tilted-penalty formulation is adopted, suggesting a more stable local search regime after the main feasibility bottleneck has been resolved. At the same time, the held-out E-n13 result remains clearly harder than the earlier curriculum stages, which is consistent with the fact that the routing workflow combines assignment feasibility and downstream cost quality in a single evaluation target.

D. Cross-Problem Lessons

Taken together, the two case studies support three conclusions. First, the value of the framework lies in *adaptive policy discovery*, not in selecting a single globally best solver configuration. Second, the dominant interventions are problem-dependent: for MIS, the most useful changes are objective selection, solver family changes, and qubit compression; for CVRP, they are penalty design, sampling-budget allocation,

TABLE I
SUMMARY OF DISCOVERED MIS CONTROLLERS ACROSS CURRICULUM STAGES.

Stage	Best policy	Confirmed/final gap	Role
16-node	WS-QAOA + CVaR($\alpha = 0.25$)	0.250	confirmed
32-node	QRAO 3:1 + magic rounding	0.247	confirmed
48-node	Adaptive QRAO 3:1 $\rightarrow$ 2:1	0.533	confirmed
64-node	Adaptive QRAO 3:1 $\rightarrow$ 2:1	0.550	held-out final

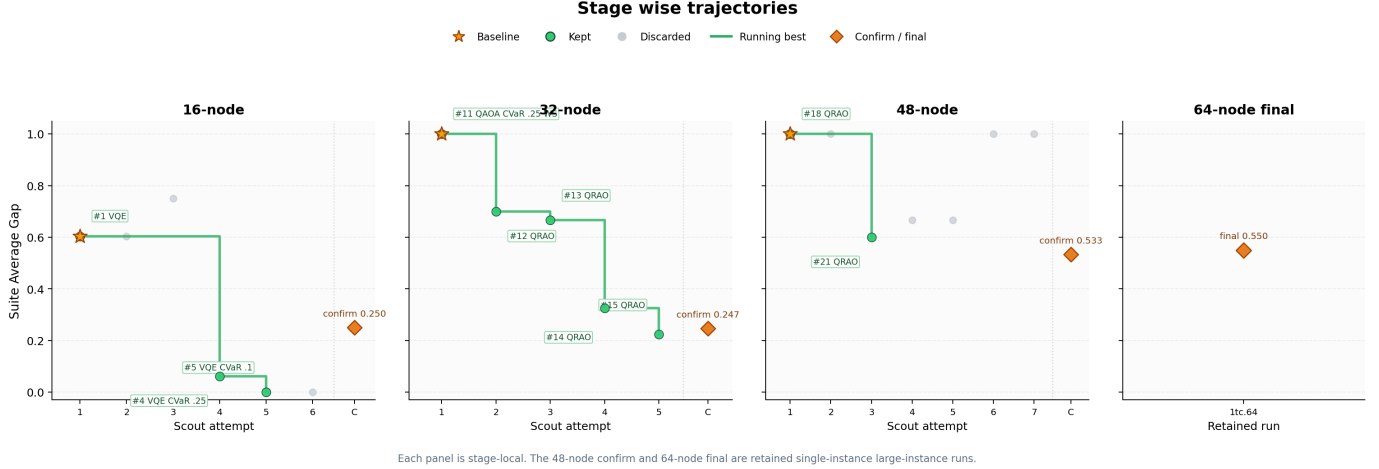


Fig. 1. Stage-wise MIS search trajectories. Each panel is local to one stage. Green points denote retained scout candidates, gray points denote discarded candidates, stars denote stage baselines, and orange diamonds denote confirmed winners or the held-out final. The trajectories show that the best solver family changes with scale: CVaR-enhanced warm-start QAOA is strongest at 16 nodes, whereas QRAO-based compressed policies dominate at larger sizes.

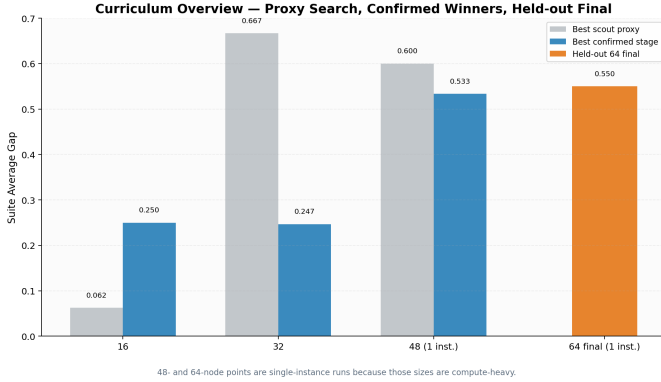


Fig. 2. MIS curriculum overview comparing best scout proxy, best confirmed stage, and the held-out 64-node final. The discrepancy between scout and confirmed results shows that proxy-only selection is unreliable, motivating the staged scout-promote-confirm protocol.

and workflow-level feasibility control. Third, staged evaluation is essential. In MIS, proxy evaluations can mis-rank candidates and materially overestimate performance; in CVRP, replay guardrails are necessary to prevent gains on a new stage from masking regressions on earlier validated stages. Together, these results position AutoQResearch as a practical closed-loop quantum-GenAI workflow for discovering adaptive solver-control policies across distinct optimization settings.

TABLE II

STAGED-CONFIRMATION ABLATION ON MIS, FROM THE RECORDED PROMOTION ROUNDS. EACH ROW IS A PROMOTED CANDIDATE WITH ITS CHEAP SCOUT-PROXY GAP AND ITS FULL-SUITE CONFIRMED GAP (LOWER IS BETTER). A SCOUT-ONLY RULE WOULD SELECT THE SCOUT-ARGMIN (UNDERLINED); CONFIRMATION SELECTS THE CONFIRM-ARGMIN (**BOLD**). AT BOTH STAGES THE TWO DISAGREE, AND AT 32 NODES THE CONFIRMED WINNER IS THE WORST SCOUT-RANKED CANDIDATE—SO A PROXY-ONLY RULE WOULD HAVE DISCARDED IT.

Stage	Promoted candidate	Scout gap	Confirm gap
16-node	VQE + CVaR($\alpha=0.10$)	<u>0.000</u>	0.400
16-node	VQE + CVaR($\alpha=0.25$)	0.063	0.250
16-node	VQE baseline	0.604	0.581
32-node	QRAO 3:1 (a)	0.225	0.292
32-node	QRAO 3:1 (b)	0.325	0.450
32-node	QRAO 3:1 (c)	0.667	0.247

V. EXECUTED HARDWARE VALIDATION

To test whether the discovered policies remain executable beyond simulation, we performed limited validation runs on IBM quantum hardware for one representative instance from each problem setting. These runs are not intended as full hardware benchmarks. Rather, they serve as restricted execution studies showing that the policies discovered by the closed-loop search can be transpiled, scheduled, and executed on current devices while preserving useful solution quality.

For MIS, we executed the final 16-node controller on a retained instance using the same warm-start QAOA policy

TABLE III
SUMMARY OF DISCOVERED CVRP POLICIES ACROSS CURRICULUM STAGES.

Stage	Best confirmed/final gap	Main policy change
8-customer	0.095	higher final sampling
10-customer	0.047	tilted penalty + replay-passing sampling
12-customer	0.010	retained hybrid single-instance run
E-n13-k4	0.139	held-out final hybrid protocol

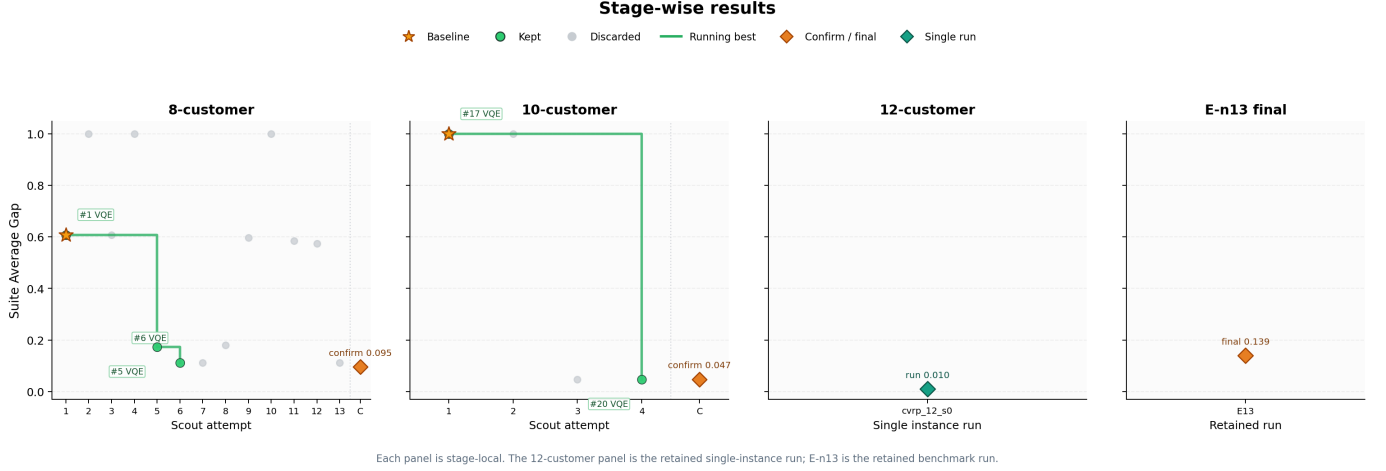


Fig. 3. Stage-wise CVRP search trajectories. The 8-customer stage improves feasibility through increased sampling, while the 10-customer stage improves sharply after adopting a tilted capacity penalty. The retained 12-customer run and held-out E-n13 benchmark demonstrate that the framework can discover useful workflow-level adaptations beyond the initial curriculum stages.

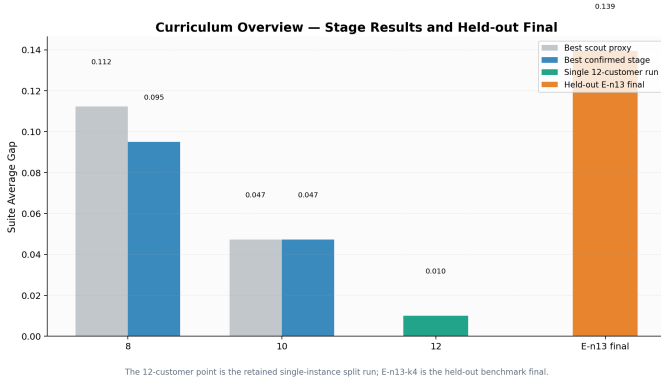


Fig. 4. CVRP curriculum overview showing best scout proxy, best confirmed stage, retained 12-customer run, and held-out E-n13 final. The strongest gains occur between the 8- and 10-customer stages after the move to a more effective penalty design, while the held-out benchmark remains more challenging than the curriculum stages.

identified as strongest in simulation. For CVRP, we executed the retained held-out E-n13-k4 policy using the hybrid controller selected by the search, in which a reduced quantum assignment subproblem is embedded inside a larger classical routing workflow. A high-level comparison of the two hardware runs is reported in Table IV, while detailed execution statistics are given in Tables V and VI.

A. MIS Hardware Validation

The MIS hardware run used the final stage-1 policy: depth-1 warm-start QAOA with a CVaR objective ($\alpha = 0.25$), linear entanglement, COBYLA optimization, and 1024 shots for both estimator and sampler evaluation. The logical circuit used 16 qubits, 2 trainable parameters, logical depth 14, and 22 logical two-qubit gates. Execution was distributed across `ibm_fez` and `ibm_marrakesh`, both with 156 qubits. The total wall-clock time was 369.75s. The best sampled bit-string was feasible and attained the exact optimum value 8.0, yielding gap 0.0. At the same time, the measured distribution remained broad: `top1_prob`=0.0322, the raw feasibility rate was 0.5547, and 664 unique bitstrings were observed among 1024 samples. This run therefore shows that the discovered MIS controller can be executed on current hardware without changing its solver structure and can still recover an optimal solution on the tested instance, even though the hardware sampling distribution is far from sharply concentrated.

B. CVRP Hardware Validation

The CVRP hardware run used the retained E-n13-k4 controller, which is explicitly hybrid. The policy combines a classical preprocessing step that fixes unambiguous assignment decisions, a reduced VQE solve for the remaining ambiguous assignment subproblem, feasibility repair, and classical exact TSP routing on the resulting clusters. The retained policy uses an `efficient_su2` ansatz with one repetition, linear

entanglement, COBYLA, 2048 estimator shots, 16384 sampler shots, tilted capacity penalties, and depot-farthest seeding. Although the full assignment model contains 48 variables, the reduced quantum subproblem involves only 16 qubits because only four customers remain ambiguous after the classical preprocessing step.

The hardware run was executed on the same IBM backends, `ibm_fez` and `ibm_marrakesh`, each with 156 qubits. The reduced quantum circuit used 16 qubits, 64 parameters, total logical gate count 79, and 15 logical two-qubit gates. Representative transpiled circuits on hardware had depth 52–53 with 15 two-qubit gates. The run completed successfully, produced a feasible repaired assignment, and yielded a routed cost of 287.0 against an optimal reference cost of 247, corresponding to gap 0.139373. The total wall-clock time was 4395.93 s. Importantly, this run improved substantially over the classical greedy pre-routing assignment inside the same hybrid controller, whose routed cost was 311.0 with gap 0.205788. Thus, the executed CVRP controller was not only hardware-feasible, but also materially useful within the end-to-end hybrid routing workflow.

Taken together, these two validation studies support the same conclusion from two different directions. In MIS, the discovered controller transfers to hardware without losing optimal solution quality on the tested instance. In CVRP, the discovered controller remains executable even in a richer hybrid workflow that combines quantum assignment refinement with classical repair and downstream routing. Although these are restricted single-instance studies and should not be interpreted as broad hardware benchmarks, they show that the policies discovered by *AutoQResearch* are not merely simulator artifacts; they can be compiled and executed on current IBM hardware while preserving nontrivial end-to-end performance. We stress the methodological limits of these runs: each was executed within a single calibration window and reported as a single execution, so the numbers reflect one draw of device conditions (readout noise, routing, and calibration drift) rather than an averaged or interval estimate. Repeated executions across calibration periods, with variance or confidence intervals and a study of policy stability under drift, are the natural next step and are left to future work; the released harness exposes the same hardware entry points to make such repetition reproducible.

VI. DISCUSSION

A. *AutoQResearch* as a Closed-Loop Quantum–GenAI Workflow

The main contribution of this paper is not a new variational quantum algorithm, nor a new combinatorial formulation, but a closed-loop workflow in which a generative model proposes adaptive solver-control policies and a quantum optimization stack validates, rejects, or refines them through measured execution outcomes. This framing is important because it shifts the role of the LLM from passive assistant to structured experiment planner. The agent does not merely suggest hyperparameters once; it observes solver diagnostics, edits a

restricted policy surface, and iterates under a fixed evaluation protocol. In this sense, *AutoQResearch* is best understood as a quantum–GenAI co-design framework for autonomous solver discovery rather than as a conventional AutoML tuner.

The two case studies support this interpretation from complementary directions: on MIS the effective solver family changes with scale (CVaR-enhanced warm-start QAOA at 16 nodes, QRAO-based compression at larger sizes), whereas on CVRP the dominant improvements are workflow-sensitive (penalty redesign, sampling-budget allocation, hybrid feasibility repair). That the same closed-loop search remains useful across both regimes is among the strongest evidence in the paper that the agent navigates distinct optimization regimes rather than fitting a single problem class.

B. Why Adaptive Policies Matter

A central lesson is that the appropriate search object is an adaptive policy, not a single fixed configuration. On MIS the relevant choices are switching measurement objective, changing solver family, and compression-based fallback; on CVRP they are changing the assignment penalty, reallocating sampling budget, and embedding the quantum solver in a hybrid repair-and-routing pipeline. These are qualitatively different interventions, yet all are expressible within the same restricted interface. This is where the framework moves beyond static hyperparameter selection: a static configuration cannot say “if concentration collapses, move to a compressed solver family” or “if feasibility is the bottleneck, change the penalty and increase final sampling.” In our runs this conditional behavior is the mechanism by which the framework improves over the baseline, supporting the broader claim that sequential policy search is a more natural formulation of solver design than one-shot configuration search.

C. Methodological Value of Staged Confirmation

A second major lesson is methodological, and the ablation of Section IV-B makes it concrete: cheap proxy evaluations accelerate search but are not reliable enough to serve as the sole acceptance rule. The proxy can overestimate stage performance and even invert candidate rankings—at 32 nodes the confirmed winner was the worst scout-ranked candidate in its round—while on CVRP replay guardrails are needed to stop apparent gains on a new stage from masking regressions on earlier ones. This is broader than the specific benchmarks: any LLM-guided workflow that optimizes against low-cost proxies risks overfitting them unless it validates on the true target. The scout–promote–confirm design is therefore part of the paper’s methodological contribution, not merely an implementation convenience.

D. Scope, Limitations, and Future Directions

The conclusions of this paper should be interpreted within the scope of the studied framework. First, the action space is curated rather than open-ended, and the effectiveness of the system derives in part from strong human-designed inductive biases: the choice of solver families, the diagnostic signals,

TABLE IV
SUMMARY OF EXECUTED HARDWARE VALIDATION RUNS.

Field	MIS	CVRP
Instance	ltc.16.txt	E-n13-k4.vrp
Backends	ibm_fez, ibm_marrakesh	ibm_fez, ibm_marrakesh
Policy type	WS-QAOA + CVaR	Hybrid VQE + classical routing
Quantum width used	16	16
Wall time (s)	369.75	4395.93
Reference objective	8.0	247.0
Obtained objective	8.0	287.0
Gap	0.0	0.139373
Feasible output	Yes	Yes

TABLE V
REPRESENTATIVE HARDWARE-EXECUTION DETAILS FOR THE MIS 16-NODE RUN.

Field	Value
Policy type	Warm-start QAOA + CVaR
CVaR parameter	$\alpha = 0.25$
Entanglement	Linear
Repetitions	1
Optimizer	COBYLA
Logical qubits	16
Trainable parameters	2
Logical depth	14
Logical 2Q gates	22
Logical total gates	102
Estimator shots	1024
Sampler shots	1024
Backends used	ibm_fez, ibm_marrakesh
Total hardware jobs	24
Best objective value	8.0
Exact optimum	8.0
Optimality gap	0.0
Feasible best sample	Yes
Raw feasibility rate	0.5547
Top-1 probability	0.0322
Unique sampled bitstrings	664 / 1024

TABLE VI
REPRESENTATIVE HARDWARE-EXECUTION DETAILS FOR THE CVRP E-N13-K4 RUN.

Field	Value
Policy type	Hybrid reduced VQE + classical exact routing
Assignment penalty	Tilted
Seed method	depot_farthest
Full assignment variables	48
Reduced quantum subproblem qubits	16
Ambiguous customers refined quantumly	4
Ansatz	efficient_su2, depth 1
Optimizer	COBYLA
Estimator shots	2048
Sampler shots	16384
Logical gate count	79
Logical 2Q gate count	15
Representative transpiled depth	52–53
Representative transpiled 2Q gates	15
Classical greedy routed cost	311.0
Final routed cost	287.0
Optimal reference cost	247.0
Final gap	0.139373

and the promotion protocol are all engineered. The framework is therefore more accurately described as *structured adaptive policy search* than as open-ended autonomous scientific discovery, and the discovered policies are optimal only relative to the explored design space. We use “discovery” throughout in this bounded sense—discovery of adaptive policies within a curated space, not invention of new algorithms.

Second, and most importantly, we do not yet isolate the contribution of the LLM from that of the curated surface and staged harness. The paper provides a log-derived staged-confirmation ablation (Section IV-B), search-cost and LLM-reliability accounting (Section III-C), and a full specification of the agent (model, prompt, protocol), but these analyses substantiate the workflow rather than separate the agent’s contribution from the interface. What remains open is a *matched-budget head-to-head* against random search, Bayesian optimization, evolutionary search, and bandit controllers *over the identical policy surface*. Because the policy space is a discrete, conditional program space rather than a smooth parameter vector, such a comparison requires care in adapting each baseline to the surface; the released harness exposes the frozen-baseline and study-runner entry points precisely so this comparison is reproducible, and we consider it the single most valuable follow-up.

Third, the empirical scale and statistical robustness remain limited: the MIS 48- and 64-node results rest on retained sparse instances, the CVRP 12-customer and held-out hardware studies are single-instance evaluations, and search is driven from a fixed seed. We report per-instance gaps and provide a post-lock five-seed robustness protocol, but we do not report variance or confidence intervals across many independent agent trajectories; larger instance suites, multiple independent runs, and interval estimates would make the empirical claims more conclusive. Finally, policies are discovered under idealized noiseless simulation, and the hardware validation—while confirming executability—should not be read as a broad, noise-averaged hardware benchmark.

These limitations suggest several natural directions for future work. One is to expand the benchmark set so that the closed-loop search can be evaluated across a larger family of optimization workflows and hardware backends. A second is to compare LLM-guided policy search directly against other structured search methods under a common interface and budget. A third is to expose richer policy surfaces, including resource-aware routing across heterogeneous backends or learned policies for when to invoke quantum versus classical subroutines inside hybrid workflows. More broadly, the results here suggest that the most promising role for generative AI in quantum optimization may not be unrestricted algorithm invention, but disciplined closed-loop search over structured solver-design spaces.

VII. OPEN-SOURCE RELEASE

To support reproducibility, we release *AutoQResearch* as a public artifact accompanying this paper. The repository includes the core framework, solver implementations for VQE,

QAOA, QRAO, and PCE, benchmark instances used in the study, and the policy-search infrastructure required to reproduce the reported experiments.

The release also provides experiment artifacts generated during the search process, including promoted policy checkpoints, execution logs, the instruction file (`program.md`), hardware-execution specifications, and analysis scripts for regenerating the main plots and tables. To support exact reproduction, the release documents the driving model (GPT-5.3-Codex) and the full unmodified prompt, the fixed evaluation seed and the post-lock seed list, the simulation backend configuration (`ideal_mps / statevector` with the shot budgets used), the per-stage instance membership and splits, and the complete policy-edit history—every proposed `experiment.py` diff with its keep/revert decision—for both accepted and rejected candidates. These materials are intended to make the closed-loop search process auditable rather than only its final outputs.

Beyond reproducing the reported results, the released artifact supports follow-up work on autonomous quantum optimization workflows. In particular, it enables controlled re-evaluation of discovered policies, analysis of how prompt and protocol design affect search behavior, and extension of the framework to additional problem families and backend settings.

VIII. CONCLUSION

We presented *AutoQResearch*, an LLM-guided closed-loop framework for adaptive variational quantum optimization. Rather than treating solver design as static hyperparameter tuning, the framework casts it as sequential policy search over a curated and auditable solver space, in which a generative model proposes adaptive solver-control logic and a fixed quantum evaluation harness validates, rejects, or refines those proposals through measured outcomes.

Across two structurally different optimization settings, Maximum Independent Set (MIS) and a decomposed Capacitated Vehicle Routing Problem (CVRP) workflow, the framework discovered nontrivial problem- and scale-dependent policies that improved substantially over their respective baselines: a transition from CVaR-enhanced warm-start QAOA to QRAO-based compression on MIS, and penalty-, sampling-, and repair-level adaptations on CVRP. The value of the framework lies not in selecting one universally best configuration, but in discovering policies that adapt to the dominant failure mode of the current regime, and the consistency of gains across both problems suggests structure-aware adaptation rather than problem-specific heuristics.

A second key finding is methodological: staged confirmation is essential for credible autonomous experimentation. As the ablation of Section IV-B shows on real promotion logs, cheap scout evaluations can misestimate policy quality and even invert candidate rankings, so the scout–promote–confirm protocol with replay guardrails is part of the contribution, not an implementation detail.

Overall, this work positions *AutoQResearch* as a benchmarked quantum–GenAI co-design workflow for autonomous

solver discovery. More broadly, the results suggest that a promising role for generative AI in quantum optimization is not unrestricted algorithm invention, but disciplined closed-loop search over structured solver-design spaces, where candidate policies are proposed by AI and validated by quantum execution. Extending this framework to additional benchmark families (e.g., portfolio optimization and network design) is a natural next step.

ACKNOWLEDGEMENTS

This project is supported by the National Research Foundation, Singapore through the National Quantum Office, hosted in A*STAR, under its Quantum Engineering Programme 3.0 Funding Initiative (W24Q3D0002).

REFERENCES

- [1] A. Peruzzo, J. McClean, P. Shadbolt, M.-H. Yung, X.-Q. Zhou, P. J. Love, A. Aspuru-Guzik, and J. L. O'Brien, "A variational eigenvalue solver on a photonic quantum processor," *Nature Communications*, vol. 5, no. 1, Jul. 2014. [Online]. Available: <http://dx.doi.org/10.1038/ncomms5213>
- [2] E. Farhi, J. Goldstone, and S. Gutmann, "A quantum approximate optimization algorithm," 2014. [Online]. Available: <https://arxiv.org/abs/1411.4028>
- [3] P. K. Barkoutsos, G. Nannicini, A. Robert, I. Tavernelli, and S. Woerner, "Improving variational quantum optimization using cvar," *Quantum*, vol. 4, p. 256, Apr. 2020. [Online]. Available: <http://dx.doi.org/10.22331/q-2020-04-20-256>
- [4] D. J. Egger, J. Mareček, and S. Woerner, "Warm-starting quantum optimization," *Quantum*, vol. 5, p. 479, Jun. 2021. [Online]. Available: <http://dx.doi.org/10.22331/q-2021-06-17-479>
- [5] R. Herrman, P. C. Lotshaw, J. Ostrowski, T. S. Humble, and G. Siopsis, "Multi-angle quantum approximate optimization algorithm," 2021. [Online]. Available: <https://arxiv.org/abs/2109.11455>
- [6] B. Fuller, C. Hadfield, J. R. Glick, T. Imamichi, T. Itoko, R. J. Thompson, Y. Jiao, M. M. Kagele, A. W. Blom-Schieber, R. Raymond, and A. Mezzacapo, "Approximate solutions of combinatorial problems via quantum relaxations," 2021. [Online]. Available: <https://arxiv.org/abs/2111.03167>
- [7] M. Sharma, Y. Jin, H. C. Lau, and R. Raymond, "Quantum relaxation for solving multiple knapsack problems," in *2024 IEEE International Conference on Quantum Computing and Engineering (QCE)*, vol. 01, 2024, pp. 692–698.
- [8] M. Sciorilli, L. Borges, T. L. Patti, D. García-Martín, G. Camilo, A. Anandkumar, and L. Aolita, "Towards large-scale quantum optimization solvers with few qubits," *Nature Communications*, vol. 16, no. 1, Jan. 2025. [Online]. Available: <http://dx.doi.org/10.1038/s41467-024-55346-z>
- [9] M. Sharma and H. C. Lau, "A comparative study of quantum optimization techniques for solving combinatorial optimization benchmark problems," 2025. [Online]. Available: <https://arxiv.org/abs/2503.12121>
- [10] B. Shahriari, K. Swersky, Z. Wang, R. P. Adams, and N. de Freitas, "Taking the human out of the loop: A review of bayesian optimization," *Proceedings of the IEEE*, vol. 104, no. 1, pp. 148–175, 2016.
- [11] D. A. Boiko, R. MacKnight, B. Kline, and G. Gomes, "Autonomous chemical research with large language models," *Nature*, vol. 624, no. 7992, pp. 570–578, Dec. 2023. [Online]. Available: <https://doi.org/10.1038/s41586-023-06792-0>
- [12] C. Lu, C. Lu, R. T. Lange, J. Foerster, J. Clune, and D. Ha, "The ai scientist: Towards fully automated open-ended scientific discovery," 2024. [Online]. Available: <https://arxiv.org/abs/2408.06292>
- [13] Q. Huang, J. Vora, P. Liang, and J. Leskovec, "Mlagentbench: Evaluating language agents on machine learning experimentation," 2024. [Online]. Available: <https://arxiv.org/abs/2310.03302>
- [14] A. Karpathy, "autoresearch," GitHub repository, 2026, accessed: 2026-03-23. [Online]. Available: <https://github.com/karpathy/autoresearch>
- [15] M. R. Garey and D. S. Johnson, *Computers and Intractability: A Guide to the Theory of NP-Completeness*. W. H. Freeman and Company, 1979.
- [16] P. Toth and D. Vigo, *The Vehicle Routing Problem*, ser. MOS-SIAM Series on Optimization. Philadelphia, PA: SIAM, 2002.
- [17] M. Sharma and H. C. Lau, "Qubit-scalable cvrp via lagrangian knapsack decomposition and noise-aware quantum execution," 2026. [Online]. Available: <https://arxiv.org/abs/2604.22194>
- [18] M. Sharma and H. C. Lau, "Hybrid learning and optimization methods for solving capacitated vehicle routing problem," in *Quantum Computing and Artificial Intelligence*, S. Ali, F. Chicano, and A. Moraglio, Eds. Cham: Springer Nature Switzerland, 2026, pp. 18–33.
- [19] M. L. Fisher and R. Jaikumar, "A generalized assignment heuristic for vehicle routing," *Networks*, vol. 11, no. 2, pp. 109–124, 1981.
- [20] E. Uchoa, D. Pecin, A. Pessoa, M. Poggi, T. Vidal, and A. Subramanian, "New benchmark instances for the capacitated vehicle routing problem," *European Journal of Operational Research*, vol. 257, no. 3, pp. 845–858, 2017.