

Optimizing ground state preparation protocols with autoresearch

Luis Mantilla Calderón^{1,2,3,*}, Jérôme F. Gonthier¹, Ignacio Gustin⁴, Varinia Bernales^{2,4,7,*}, Alán Aspuru-Guzik^{1,2,3,4,5,6,7,*}

¹NVIDIA Corporation, Santa Clara, CA, USA

²Department of Computer Science, University of Toronto, Toronto, ON, Canada

³Vector Institute for Artificial Intelligence, Toronto, ON, Canada

⁴Department of Chemistry, University of Toronto, Toronto, ON, Canada

⁵Department of Materials Science & Engineering, University of Toronto, Toronto, ON, Canada

⁶Department of Chemical Engineering & Applied Chemistry, University of Toronto, Toronto, ON, Canada

⁷Acceleration Consortium and CIFAR, Toronto, ON, Canada

Artificial intelligent language-model based coding agents have significantly changed the way we interact with computers in our day-to-day, as it is common to use them to create, improve, and run programming scripts only using natural language. Agent code updates can be better guided when such programs can be executed and scored automatically rather than judged by human preference. In quantum computing and classical quantum simulation settings, ground-state preparation has a parallel structure: candidate protocols can be ranked by estimated energies and other proxies indicating proper quantum-state convergence. In this work, we study how autoresearch, a code optimization strategy based on coding agents, can be used to optimize hyperparameter choices of different ground-state preparation and sampling protocols, including the variational quantum eigensolver (VQE), density matrix renormalization group (DMRG), and auxiliary-field quantum Monte Carlo (AFQMC). We validate the viability and capacity of this method on simple spin models and molecular Hamiltonians. Across all three settings, the agent mutates simple baselines into complex protocols with improved energy proxies while operating under constrained space-time computational budgets. We conclude with discussions of other quantum routines that support executable scalar scoring, enabling evolutionary coding agents to automate a substantial portion of the protocol-tuning work that would otherwise be required manually.

Date: May 11, 2026

Correspondence: luis@cs.toronto.edu
varinia@bernales.org
alan@aspuru.com

Keywords: Scientific machine learning, quantum computing, tensor networks, quantum Monte Carlo, coding agents



1 Introduction

Recent progress in evolutionary coding agents that employ large language models (LLMs) has clarified a simple principle: once candidate programs can be executed and scored automatically, search and editions over codebases can produce real algorithmic improvement. AlphaTensor (1) and AlphaDev (2) used reinforcement learning to improve matrix multiplication and low-level sorting routines, while FunSearch (3) showed that large language models can serve as mutation operators inside an evolutionary loop over executable programs. Related work on reinforcement learning with verifiable rewards argues that outcome-level reward signals can themselves incentivize correct reasoning when evaluation is automatically checkable (4). Follow-on systems extended the same logic to prompt evolution, heuristic search, reflective mutation, and codebase-scale editing, including EvoPrompting (5), Evolution of Heuristics (6), GEPA (7), ReEvo (8), AlphaEvolve (9; 10), TTT-Discover (11), and Darwin Gödel Machine (12).

That coding-agent trajectory is now blending into a broader class of scientific co-worker systems that plan, execute, and interpret domain workflows rather than only emitting standalone code. Recent examples span physics, chemistry, and general scientific discovery, including Coscientist (13), Organa (14), AI co-scientist (15), El Agente (16; 17; 18; 19; 20; 21), and many others capable of automating research (22; 23; 24; 25; 26; 27; 28; 29). These domain-specific AI agents have been made possible in large part by significant improvements in foundation models, such as GPT Thinking (30), Claude Opus (31), Nemotron Super (32), and similar models framed around long-horizon coding and agentic tool use.

This paper explores how coding agents can optimize quantum and quantum-classical many-body state preparation protocols. The main goal is to propose benchmark problems for which an AI agent can make code changes, run the resulting program, and receive an honest scalar signal from the underlying physics. Andrej Karpathy’s autoresearch loop is a useful software template for that setup because it separates candidate generation from evaluation and keeps the optimization trace auditable (33). We adapt this software to the needs of ground-state optimization and use it as an agent skill to improve simple state-preparation protocols.

We instantiate that idea in three benchmark families. First, we let the agent edit the code defining a variational quantum eigensolver (VQE) (34; 35; 36; 37) ansatz and its optimizer for molecular active-space problems. Second, we let it tune one-dimensional density matrix renormalization group (DMRG) (38; 39; 40) protocols for spin-chain Hamiltonians. Third, we let it tune auxiliary-field quantum Monte Carlo (AFQMC) (41; 42; 43) trial-states and propagation choices under a fixed compute budget. Across all three settings, the workflow is the same; we packaged it into an installable agent skill called `gsopt`. Such skill mutates executable code, obtains energy and energy-related metrics, logs meaningful values, and retains those code changes that improve a physically meaningful score.

2 Methods

The autoresearch framework (33) follows a simple pattern: generate a candidate configuration or code edit, execute the benchmark, record a scalar score, and retain improvements in a persistent execution history. Specifically, each scored candidate is stored with its outcome, so the optimization trace can be inspected later. A practical advantage of coding-agent systems in this setting is that they can also search online documentation, codebases, and related technical references for implementation ideas, which helps the search adapt to the constraints and opportunities of a specific hardware and software stack. The important design decision is not the specific proposal heuristic but the evaluator. Each task in this paper is constructed so that the score is relevant and scientifically interpretable. That is what makes autonomous search meaningful rather than ambiguous.

Ground-state preparation is particularly well-suited to this loop because the solver typically exposes a scalar proxy for overlap with the ground state. At a coarse level, most scalable ground-state methods are built from a few recurring principles: variational minimization, projector or filtering dynamics in Krylov space or imaginary time, continuation or annealing along a Hamiltonian path, and self-consistent or renormalization-style fixed-point updates (44; 41; 42; 45; 46; 47; 48; 49; 50; 51). These algorithmic families have several similarities: Hartree–Fock is variational but solved self-consistently, DMRG is variational with a renormalization interpretation, and quantum Monte Carlo (QMC) combines projection with stochastic sampling. What matters for autoresearch is that each family yields an executable quantity that improves as the state improves.

For variational methods such as the variational quantum eigensolver (VQE) and tensor-network ground-state solvers, that quantity is the Rayleigh quotient (52),

$$E[\psi] = \frac{\langle \psi | H | \psi \rangle}{\langle \psi | \psi \rangle} \geq E_0, \quad (1)$$

where E_0 is the exact ground-state energy of the target Hamiltonian H . This makes the online objective simple: lower variational energy means a better candidate state under the same evaluation budget.

AFQMC uses the same philosophy but a different numerical mechanism. Starting from a trial state $|\Psi_T\rangle$, the benchmark solver projects toward the ground state in imaginary time,

$$|\Psi_0\rangle \propto \lim_{\beta \rightarrow \infty} e^{-\beta(H-E_T)} |\Psi_T\rangle. \quad (2)$$

After a Hubbard–Stratonovich transformation (41; 42), AFQMC becomes a stochastic propagation of Slater-determinant walkers whose stability and residual bias depend on the trial state and on the constrained-path (53) or phaseless (43; 54) approximation. The online objective is therefore not a formal upper bound. Instead, at a fixed stochastic budget, we prefer candidates with lower post-equilibration energy and smaller fluctuations in the final sampled blocks.

At the level of the autoresearch loop, both variational and projector-based benchmarks fit the same constrained-search picture. If $\mathcal{B}$ denotes a chosen hardware and software stack, the search can be written as the constrained minimization problem

$$\begin{aligned} \min_{\theta, c} \quad & \mathcal{L}_H(\theta, c; \mathcal{B}) \\ \text{s.t.} \quad & |\psi(\theta, c; \mathcal{B})\rangle \in \mathcal{S}(\mathcal{B}), \\ & \tau(\theta, c; \mathcal{B}) \leq T, \end{aligned} \tag{3}$$

where c is a collection of code-level choices such as the ansatz, update rule, compilation settings, or schedule, $\mathcal{S}(\mathcal{B})$ is the set of states realizable on backend $\mathcal{B}$, T is the wall-time budget, and $\mathcal{L}_H$ is an energy proxy for closeness to the ground state. This makes explicit that the goal is not unconstrained energy minimization, but the search for the best score that can actually be realized on a chosen backend within a fixed execution budget. Although Eq. (3) is written with a wall-time cap because all experiments in this manuscript are scored in that manner, the same constrained-search view can absorb other scarce resources as well, including memory footprint, qubit count, quantum circuit shot budget, non-Clifford and T-gate count, or any other expensive resource of relevance. This broader perspective is the same one used in resource-aware algorithm and compiler optimization, where search is organized around constrained cost rather than a single unconstrained runtime objective (1; 2; 55; 56). In the current VQE and tensor-network experiments, the live score is simply the final energy achieved within the allotted budget, while AFQMC uses a fixed-budget post-equilibration score that favours lower energy and smaller fluctuations. This is the quantity actually optimized by the autoresearch loop across all benchmarks.

Related work already shows that the problems we consider in this paper can benefit from automated design. In VQE, these techniques include: adaptive ansatz growth (ADAPT-VQE) (57), evolutionary eigensolvers (EVQE) (58), circuit-architecture search (59), Meta-VQE (60), generative quantum eigensolvers (GQE) (61), LLM-optimized VQE (62), all of which optimize an ansatz based on an energy signal. In tensor networks, the density matrix renormalization group (DMRG) (50; 51) and its reinterpretation as matrix product states (MPS) (38; 39) motivate broader ansätze such as tree tensor networks (TTN) (63), multi-scale entanglement renormalization ansatz (MERA) (64), and projected entangled pair states (PEPS) (65; 40). Tensor-network methods can also be adapted via automated parameter and structural optimization, including entanglement-based topology selection (66), automatic structural updates (67), and differentiable-programming frameworks for end-to-end gradient-based optimization (68). In AFQMC, determinant auxiliary-field formulations (41; 42) and later constrained-path and phaseless variants (53; 43; 54) make the trial wavefunction central to bias and efficiency, motivating automated refinement strategies from symmetry-aware trial states (69) to self-consistent constraint optimization (70) and algorithmic construction of multideterminant trial states (71; 72; 73).

3 Autoresearch experiments

All `gsopt` autoresearch runs discussed in this section use GPT-5.4 in “xhigh” reasoning mode as the proposal engine. The suite is intentionally small: the point is not scale by itself, but exact or near-exact scoring under fixed resources. VQE and DMRG candidates are each scored under a fixed 20 s budget on the 10 performance cores of a local Apple M4 Pro chip with BLAS/OpenMP threads clamped to ten, AFQMC candidates are scored under a fixed 5-minute budget using two MPI processes, and in every case the untouched starting protocol is archived as iteration 0 before the mutation loop begins.

3.1 VQE ansatz and optimizer search

VQEs cast electronic-structure ground-state search as minimization of the energy of a parameterized circuit (74; 34; 35; 36; 75). In the actual benchmark implementation, the active-space molecular Hamiltonian is mapped

to qubits with the Jordan–Wigner transform (76) and evaluated as a Pauli-string operator,

$$H_{\text{JW}} = \sum_{\ell} c_{\ell} P_{\ell}, \quad P_{\ell} \in \{I, X, Y, Z\}^{\otimes n_q}, \quad (4)$$

where the real coefficients c_{ℓ} are determined by the active-space one- and two-electron integrals and n_q is the number of Jordan–Wigner qubits for the chosen molecule.


The benchmark uses four molecules ordered roughly from easier to harder active spaces: BH with CAS(2,3), LiH with CAS(2,4), BeH₂ with CAS(4,4), and H₂O with CAS(6,4). OpenFermion and PySCF generate the active-space Hamiltonians, while the parameterized ansatz kernels are implemented in CUDA-Q and executed on its CPU-only `qpp-cpu` target (77; 78). All four molecules are treated as neutral singlets in the STO-3G basis. The active spaces are built from contiguous windows of closed-shell RHF canonical spatial orbitals after freezing the lowest doubly occupied orbitals, and the circuit is initialized from the corresponding Hartree–Fock occupation bitstring. These choices give 6, 8, 8, and 8 Jordan–Wigner qubits for BH, LiH, BeH₂, and H₂O, respectively, with each benchmark scored against a frozen active-space FCI reference energy obtained by exact diagonalization of the corresponding Jordan–Wigner qubit Hamiltonian.

One reason to pose this as a fixed-budget search problem is trainability. For deep hardware-efficient ansätze that approach unitary 2-design behaviour, barren-plateau theory predicts exponentially small gradients (79; 80). A complementary Lie-algebraic view makes the dependence more explicit: for sufficiently deep circuits in the Lie-algebraic setting (81; 82),

$$\text{Var}[\partial_{\theta_k} E] = O\left(\frac{\|\rho_{\mathfrak{g}}\|_F^2 \|O_{\mathfrak{g}}\|_F^2}{d_{\mathfrak{g}}}\right), \quad (5)$$

where $\rho_{\mathfrak{g}}$ and $O_{\mathfrak{g}}$ denote the Lie-algebra-supported components of the input state and observable, and $d_{\mathfrak{g}} = \dim(\mathfrak{g})$ is the dynamical Lie algebra dimension of the ansatz. When $d_{\mathfrak{g}}$ itself grows exponentially with system size, this reproduces barren-plateau behaviour. This is the main computational bottleneck in the VQE benchmark: trainability can degrade rapidly even before one reaches large active spaces. The mutable efficiency levers are therefore the standard trainability choices rather than an exhaustive catalog of all possible circuit changes: ansatz family and connectivity, parameter initialization or warm starts, optimizer choice, and optimizer hyperparameters such as step size, trust-region radius, tolerance, and iteration budget. These are exactly the code-level choices the agent mutates under a fixed wall-time budget.

The VQE benchmark is therefore a code-editing search over molecule-specific CUDA-Q method files. In practice, the search space is restricted to a common non-exhaustive subset of these levers: ansatz kernel, initialization or warm-start policy, optimizer choice, and optimizer hyperparameters. All four molecular benchmarks start from the same intentionally weak baseline: a two-layer hardware-efficient ring ansatz with per-qubit R_y and R_z rotations, nearest-neighbour CNOT entanglers, Gaussian initialization scale 0.1, a Hartree–Fock computational-basis reference, and COBYLA capped at 4096 steps. Figure 1 shows that the completed 100-iteration campaigns consistently move from this baseline to UCCSD-style warm starts plus tighter local refinement, cutting the final absolute energy error by 5.5–12.9 orders of magnitude and reaching chemical accuracy in all four cases. The numbered callouts identify some of the later code changes that matter most energetically, and Appendix A1 together with the external log supplement (83) records the archived protocols and full mutation logs.

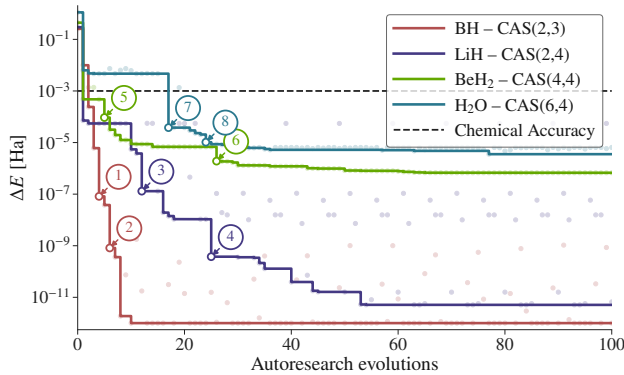

Flag	Description
1	Powell $\rightarrow$ COBYLA; rhobeg 0.5 $\rightarrow$ 0.02, tol $10^{-4} \rightarrow 10^{-8}$, steps 1024 $\rightarrow$ 4096.
2	COBYLA tighten: rhobeg 0.02 $\rightarrow$ 0.005, tol $10^{-8} \rightarrow 10^{-10}$.
3	9-parameter <code>spin_paired_symmetric</code> plus COBYLA local refine.
4	<code>step_size</code> , <code>min_step_size</code> $\div 2$; rhobeg 0.005 $\rightarrow$ 0.0025.
5	Seed a 26-amplitude UCCSD warm start.
6	COBYLA tighten: rhobeg 0.02 $\rightarrow$ 0.002, tol $10^{-8} \rightarrow 10^{-12}$.
7	<code>uccsd_sd_triplet</code> $\rightarrow$ 9-parameter <code>uccsd_spin_paired_symmetric</code> .
8	<code>init_scale</code> 0.005 $\rightarrow$ 0.0025 before COBYLA refine.

Figure 1 Combined log-scale VQE milestone figure for the four completed 100-iteration archival campaigns in the fixed-budget study. Left: pale points denote every evaluated candidate, solid lines denote the running best ΔE , and the dashed horizontal line marks chemical accuracy. Numbered callouts highlight later, energetically meaningful changes in the search trajectory rather than the trivial first ansatz swap. Right: short technical summaries of the corresponding code edits, with flag tint matching the molecule colour used in the plot. The full VQE mutation logs are listed in the external log supplement (83).

3.2 Tensor-network ground-state search

Tensor networks provide a broad family of ansätze for lattice ground states, ranging from matrix product states to tree tensor networks, MERA, and PEPS (38; 39; 63; 64; 65; 40). A compact generic spin-lattice Hamiltonian for this benchmark family is

$$H_{1D} = \sum_{i=1}^{L-1} \sum_{\alpha=x,y,z} J_{\alpha} S_i^{\alpha} S_{i+1}^{\alpha} - \sum_{i=1}^L (h_x S_i^x + h_z S_i^z), \quad (6)$$

which covers the four active open-boundary spin-1/2 chains used here. In this notation the benchmark instances are Heisenberg XXX with $(J_x, J_y, J_z, h_x, h_z) = (1, 1, 1, 0, 0)$, gapless XXZ with $(1, 1, 0.5, 0, 0)$, critical TFIM with $(0, 0, 1, 0.5, 0)$, and critical XX with $(1, 1, 0, 0, 0)$. The benchmark uses the Quimb tensor-network package (84) to tune practical one-dimensional DMRG protocols on these four critical chains at length $L = 64$. In this package, DMRG1 and DMRG2 denote the standard one-site and two-site DMRG local-update variants, respectively (50; 51; 39). We use DMRG2 with each model to obtain a frozen offline reference energy and a frozen pairwise mutual-information matrix extracted from a separate high-accuracy MPS run with a larger bond-dimension schedule, tighter cutoffs and eigensolver tolerances, and a much longer one-shot wall budget. The reference mutual information is then evaluated from the one-site and two-site reduced density matrices of that reference MPS.

The tensor-network bottleneck is different from that of VQE: the central issue is not a flat optimization landscape but entanglement-driven bond growth. Giufre Vidal’s original MPS analyses show that slightly entangled one-dimensional states admit representations with $\mathcal{O}(nd\chi^2)$ parameters, while local updates still inherit a steep bond-dimension cost and hence

$$C_{\text{TN}} = \mathcal{O}\left(n(d\chi)^3 \frac{T}{\delta}\right) = \mathcal{O}\left(nd^3 2^{3S} \frac{T}{\delta}\right), \quad \chi \geq 2^S, \quad (7)$$

where χ is the bond dimension and S is the bipartite entanglement entropy (85; 86). This is the main computational challenge in the tensor-network benchmark: the search is fundamentally about how to spend a small bond-dimension budget well. The mutable levers are therefore practical DMRG protocol choices rather than an exhaustive catalog of all tensor-network designs: one-site versus two-site updates, initialization, bond-dimension schedule, truncation cutoff, eigensolver tolerance, and sweep schedule.

Figure 2 summarizes the result structurally rather than only energetically. Each panel plots the absolute entrywise mutual-information error $|I_{ij}^{\text{TN}} - I_{ij}^{\text{ref}}|$ for the archived baseline and the best optimized protocol relative to the frozen reference matrix, so darker off-diagonal patches mark site pairs whose correlations are still least accurate. The completed 100-iteration campaigns consistently move from low-bond random-start baselines to higher-bond DMRG2 or staged DMRG1→DMRG2 schedules, lowering the final energy and visibly improving the correlation pattern across all four critical chains. Appendix A2 summarizes the archived protocols, and the external log supplement (83) gives the full mutation logs.

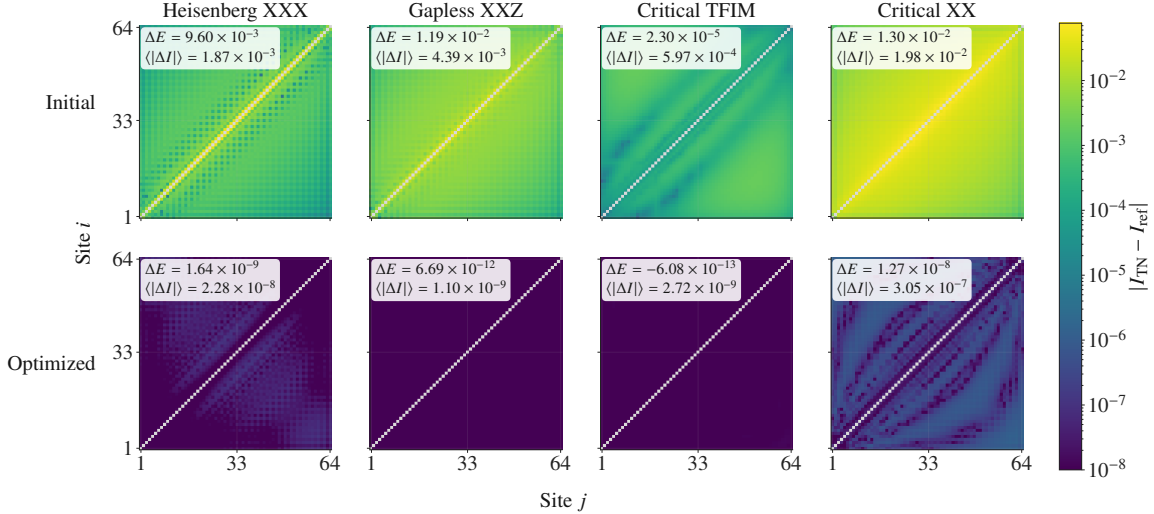


Figure 2 Tensor-network mutual-information error matrices for the four one-dimensional critical $L = 64$ benchmarks: Heisenberg XXX, gapless XXZ, critical TFIM, and critical XX. Columns denote Hamiltonians; the top row shows the archived baseline protocol and the bottom row shows the current best optimized protocol from the autoresearch run. Each panel plots the absolute entrywise error $|I_{ij}^{\text{TN}} - I_{ij}^{\text{ref}}|$ relative to a frozen high-accuracy DMRG2 MPS reference, with the diagonal masked in gray because self-information entries are not compared.

3.3 Molecular AFQMC trial-state and propagation search

Auxiliary-field quantum Monte Carlo (41; 42; 87; 53; 43; 54) is a projector method that evolves a population of Slater-determinant walkers in imaginary time while using a trial wavefunction to control the sign or phase problem. For the molecular electronic targets in the current benchmark family, the relevant Hamiltonian is the standard second-quantized electronic-structure form

$$H_{\text{elec}} = E_{\text{nuc}} + \sum_{pq} h_{pq} a_p^\dagger a_q + \frac{1}{2} \sum_{pqrs} h_{pqrs} a_p^\dagger a_q^\dagger a_s a_r. \quad (8)$$

The present AFQMC suite uses four small molecules in the STO-3G basis: H_2 , LiH , H_2O , and N_2 , all treated as neutral singlets and compared offline against frozen CCSD(T) references in the same basis. All AFQMC experiments in this work are executed with the open-source `ipie` codebase (88; 89), whose modular trial-state, walker, and propagation interfaces expose the practical AFQMC controls to the outer mutation loop. In simple terms, the method repeatedly propagates and reweights a walker population so that the constrained imaginary-time dynamics moves the ensemble toward the ground state.

The central AFQMC bottleneck is statistical stability: without constraints, the underlying phase or sign problem causes the stochastic signal to deteriorate exponentially with system size (90; 53; 43). To summarize the stochastic work in one scored run, we define

$$C_{\text{stoch}} = N_{\text{walkers}} B = N_{\text{walkers}} N_{\text{steps}} N_{\text{blocks}}, \quad (9)$$

where B is the block geometry written in the figure as $N_{\text{steps}} \times N_{\text{blocks}}$. The bottleneck can then be summarized

schematically as

$$\frac{\sigma_E}{\langle E \rangle} \propto \frac{e^{\alpha N}}{\sqrt{C_{\text{stoch}}}}, \quad (10)$$

with $\alpha > 0$ capturing the severity of the underlying phase/sign instability (91; 90). The benchmark therefore exposes the standard practical levers that trade bias, variance, and runtime: the trial family, the orbital basis or single-particle representation used when generating AFQMC inputs, the importance-sampling or weight-update policy, the Cholesky cutoff, the imaginary-time step, the walker count, the number of steps per block, stabilization and population-control cadence, and molecule-specific trial settings. Candidates are then ranked under the fixed-budget live objective

$$\mathcal{L}_{\text{AFQMC}} = \langle E \rangle_{\text{PE}} + \lambda \sigma_{E, \text{PE}}, \quad (11)$$

where $\langle E \rangle_{\text{PE}}$ is the mean of the post-equilibration region, defined here as the final 50% of sampled AFQMC blocks, $\sigma_{E, \text{PE}}$ is the sample standard deviation over that same region, and in this work we set $\lambda = 5$. This regularizes toward candidates whose final sampled tail is both lower in energy and less noisy at the same effective stochastic cost. Figure 3 shows the resulting trace-and-distribution comparison for the archived baseline and best optimized protocols. Across the four completed campaigns, the search consistently retunes walker population, timestep, and block geometry to produce lower live scores and lower post-equilibration energies under the same fixed budget. Appendix A3 summarizes the archived AFQMC protocols, and the external log supplement (83) gives the full mutation logs.

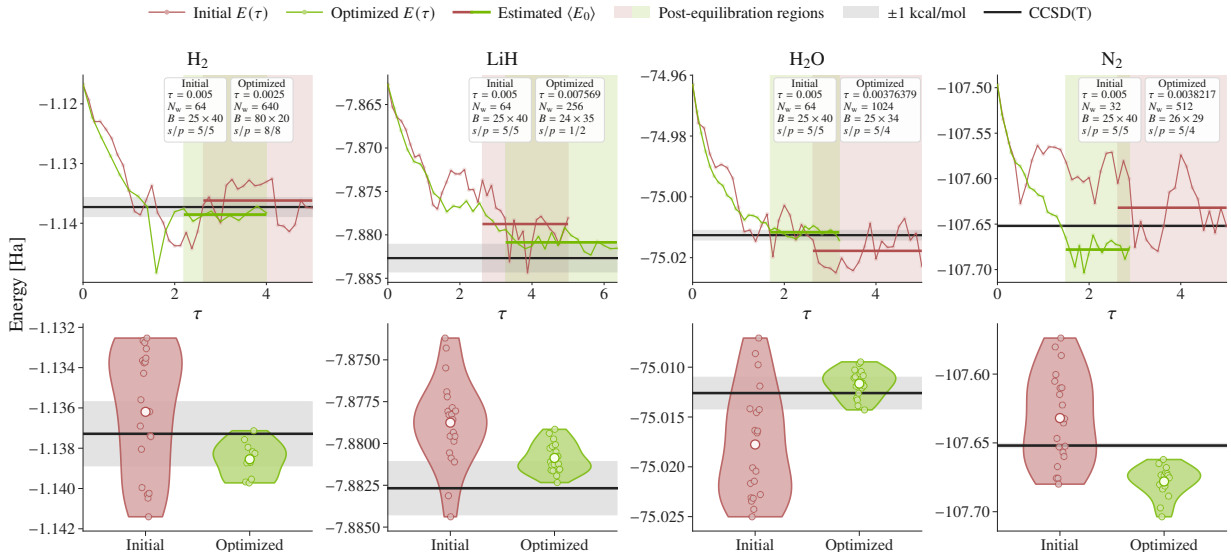


Figure 3 AFQMC comparison across H₂, LiH, H₂O, and N₂ for the molecular benchmark suite under the fixed post-equilibration live scorer. The top row shows the sampled mixed-estimator traces $E(\tau)$ for the initial and best archived optimized configurations, with the post-equilibration sampling regions shaded and the post-equilibration energy estimates $\langle E_0 \rangle$ drawn as bold horizontal segments. The bottom row shows the corresponding distributions of stored post-equilibration block energies. The shared horizontal guides mark the frozen CCSD(T) reference and the ± 1 kcal/mol chemical-accuracy window. The parameter boxes summarize the initial and optimized AFQMC controls for each molecule: τ is the imaginary-time step, N_w is the total walker count, $B = N_{\text{steps}} \times N_{\text{blocks}}$ is the block geometry, and s/p denotes the stabilization and population-control cadences.

4 Conclusions

This work shows that ground-state preparation can be framed as an automated search problem for state-of-the-art coding agents. We show this optimization across quantum circuits, tensor networks, and Monte Carlo sampling methods, where the same agent loop can improve the accuracy of the underlying ground state.

The experiments aim to improve code across different backends and Hamiltonians, spanning molecule-specific CUDA-Q VQE routines, one-dimensional DMRG schedules, and molecular AFQMC protocols under fixed compute budgets. The same template should extend to other simulators, compilers, and quantum-hardware settings whenever execution yields a reliable scalar objective. A promising direction is to optimize the T -gates in fault-tolerant quantum algorithms—if this is successfully executed, we could significantly reduce computational resources to achieve a desired quantum advantage.

This work is a proof-of-concept of the methodology and, therefore, was applied to relatively small molecular and spin-lattice systems. The next step in the journey is to explore the scaling of this approach. Ideally we want to find optimal protocols that are capable of preparing large many-body quantum states. To solve this issue, extrapolating performance from a few small- and medium-sized systems to larger systems can serve as a proxy to be optimized with autoresearch—in a similar spirit to scaling laws (92). This way, we might be able to extrapolate value to unexplored territory. In terms of finding better-optimized protocols, a natural extension of this work is to allow the underlying model parameters to vary. Reinforcement learning with verifiable rewards (RLVR), test-time adaptation, and related self-improving-agent ideas suggest that the mutation policy itself could be tuned online against the same autoresearch score (4; 11; 12). We believe these ideas will enable ground state autoresearch to find protocols that will achieve beyond state-of-the-art results in this field, given that they have already done so in other fields.

Acknowledgments

The authors thank Yuri Alexeev for his helpful feedback on the manuscript and thank Kohei Nakaji, Alex Zook, Taylor Patti, and Zijian Zhang for fruitful discussions. L.M.C. acknowledges funding from the Novo Nordisk Foundation, Grant number NNF22SA0081175, NNF Quantum Computing Programme. I.G. acknowledges funding of this project by the National Sciences and Engineering Research Council of Canada (NSERC) Alliance Grant #ALLRP587593-23. This work was supported by the AI2050 program of Schmidt Sciences. This work was supported by the Defense Advanced Research Projects Agency (DARPA) under Agreement No. HR0011262E022. A.A.-G. thanks Anders G. Frøseth, for his generous support. A.A.-G. also acknowledges the generous support of Natural Resources Canada and the Canada 150 Research Chairs program.

Code Availability

Code for the benchmarks and experiments discussed in this manuscript is available at <https://github.com/bestquark/gsopt>.

References

- [1] Alhussein Fawzi, Matej Balog, Aja Huang, Thomas Hubert, Bernardino Romera-Paredes, Mohammadamin Barekatain, Alexander Novikov, Francisco J. R. Ruiz, Julian Schrittwieser, Grzegorz Swirszcz, David Silver, Demis Hassabis, and Pushmeet Kohli. AlphaTensor: Discovering faster matrix multiplication algorithms with reinforcement learning. *Nature*, 610:47–53, 2022. doi:10.1038/s41586-022-05172-4.
- [2] Daniel J. Mankowitz, Andrea Michi, Anton Zhernov, Marco Gelmi, Marco Selvi, Cosmin Paduraru, Edouard Leurent, Shariq Iqbal, Jean-Baptiste Lespiau, Alex Ahern, et al. AlphaDev: Faster sorting algorithms discovered using deep reinforcement learning. *Nature*, 618:257–263, 2023. doi:10.1038/s41586-023-06004-9.
- [3] Bernardino Romera-Paredes, Mohammadamin Barekatain, Alexander Novikov, Matej Balog, M. Pawan Kumar, Emilien Dupont, Francisco J. R. Ruiz, Jordan S. Ellenberg, Pengming Wang, Omar Fawzi, George Holland, Pushmeet Kohli, and Alhussein Fawzi. Mathematical discoveries from program search with large language models. *Nature*, 625:468–475, 2024. doi:10.1038/s41586-023-06924-6.
- [4] Xumeng Wen, Zihan Liu, Shun Zheng, Shengyu Ye, Zhirong Wu, Yang Wang, Zhijian Xu, Xiao Liang, Junjie Li, Ziming Miao, Jiang Bian, and Mao Yang. Reinforcement learning with verifiable rewards implicitly incentivizes correct reasoning in base LLMs. In *The Fourteenth International Conference on Learning Representations*, 2026. doi:10.48550/arXiv.2506.14245.

- [5] Angelica Chen, David M. Dohan, and David R. So. EvoPrompting: Language models for code-level neural architecture search. In *Advances in Neural Information Processing Systems 36*, pages 7787–7817, 2023. doi:10.52202/075280-0342.
- [6] Fei Liu, Xialiang Tong, Mingxuan Yuan, Xi Lin, Fu Luo, Zhenkun Wang, Zhichao Lu, and Qingfu Zhang. Evolution of heuristics: Towards efficient automatic algorithm design using large language model, 2024. ICML 2024.
- [7] Lakshya A. Agrawal, Shangyin Tan, Dilara Soylu, Noah Ziemis, Rishi Khare, Krista Opsahl-Ong, Arnav Singhvi, Herumb Shandilya, Michael J. Ryan, Meng Jiang, Christopher Potts, Koushik Sen, Alexandros G. Dimakis, Ion Stoica, Dan Klein, Matei Zaharia, and Omar Khattab. GEPA: Reflective prompt evolution can outperform reinforcement learning, 2025.
- [8] Federico Berto, Zhiguang Cao, Chuanbo Hua, Haeyeon Kim, Jinkyoo Park, Guojie Song, Jiarui Wang, and Haoran Ye. ReEvo: Large language models as hyper-heuristics with reflective evolution. In *Advances in Neural Information Processing Systems 37*, pages 43571–43608, 2024. doi:10.52202/079017-1381.
- [9] Alexander Novikov, Ngan Vu, Marvin Eisenberger, Emilien Dupont, Po-Sen Huang, Adam Zsolt Wagner, Sergey Shirobokov, Borislav Kozlovskii, Francisco J. R. Ruiz, Abbas Mehrabian, M. Pawan Kumar, Abigail See, Swarat Chaudhuri, George Holland, Alex Davies, Sebastian Nowozin, Pushmeet Kohli, and Matej Balog. AlphaEvolve: A coding agent for scientific and algorithmic discovery, 2025.
- [10] Asankhaya Sharma. OpenEvolve: Open-source implementation of an evolutionary coding agent. GitHub repository, 2025. URL <https://github.com/algorithmicsuperintelligence/OpenEvolve>. Accessed 2026-03-26.
- [11] Mert Yuksekgonul, Daniel Kocejka, Xinhao Li, Federico Bianchi, Jed McCaleb, Xiaolong Wang, Jan Kautz, Yejin Choi, James Zou, Carlos Guestrin, and Yu Sun. Learning to discover at test time, 2026.
- [12] Jenny Zhang, Shengran Hu, Cong Lu, Robert Tjarko Lange, and Jeff Clune. Darwin Gödel machine: Open-ended evolution of self-improving agents. In *International Conference on Learning Representations (ICLR)*, 2026. doi:10.48550/arXiv.2505.22954. ICLR 2026 Poster.
- [13] Daniil A. Boiko, Robert MacKnight, Ben Kline, and Gabe Gomes. Autonomous chemical research with large language models. *Nature*, 624:570–578, 2023. doi:10.1038/s41586-023-06792-0.
- [14] Kourosh Darvish, Marta Skreta, Yuchi Zhao, Naruki Yoshikawa, Sagnik Som, Miroslav Bogdanovic, Yang Cao, Han Hao, Haoping Xu, Alán Aspuru-Guzik, et al. Organa: A robotic assistant for automated chemistry experimentation and characterization. *Matter*, 8(2), 2025. doi:10.1016/j.matt.2024.10.015.
- [15] Juraj Gottweis, Wei-Hung Weng, Alexander N. Daryin, Tao Tu, Anil Palepu, Petar Sirkovic, Artiom Myaskovsky, Felix Weissenberger, Keran Rong, Ryutaro Tanno, Khaled Saab, Dan Popovici, Jacob Blum, Fan Zhang, Katherine Chou, Avinatan Hassidim, Burak Gokturk, Amin Vahdat, Pushmeet Kohli, Yossi Matias, Andrew Carroll, Kavita Kulkarni, Nenad Tomasev, Yuan Guan, Vikram Dhillon, Eeshit Dhaval Vaishnav, Byron Lee, Tiago R. D. Costa, José R. Penadés, Gary Peltz, Yunhan Xu, Annalisa Pawlosky, Alan Karthikesalingam, and Vivek Natarajan. Towards an AI co-scientist, 2025.
- [16] Yunheng Zou, Austin H. Cheng, Abdulrahman Aldossary, Jiaru Bai, Shi Xuan Leong, Jorge Arturo Campos-Gonzalez-Angulo, Changhyeok Choi, Cher Tian Ser, Gary Tom, Andrew Wang, Zijian Zhang, Ilya Yakavets, Han Hao, Chris Crebolder, Varinia Bernales, and Alán Aspuru-Guzik. El agente: An autonomous agent for quantum chemistry. *Matter*, 8(7):102263, 2025. doi:10.1016/j.matt.2025.102263.
- [17] Ignacio Gustin, Luis Mantilla Calderón, Juan B. Pérez-Sánchez, Jérôme F. Gonthier, Yuma Nakamura, Karthik Panicker, Manav Ramprasad, Zijian Zhang, Yunheng Zou, Varinia Bernales, and Alán Aspuru-Guzik. El agente cuántico: Automating quantum simulations, 2025.
- [18] Juan B. Pérez-Sánchez, Yunheng Zou, Jorge A. Campos-Gonzalez-Angulo, Marcel Müller, Ignacio Gustin, Andrew Wang, Han Hao, Tsz Wai Ko, Changhyeok Choi, Eric S. Isbrandt, Mohammad Ghazi Vakili, Hanyong Xu, Chris Crebolder, Varinia Bernales, and Alán Aspuru-Guzik. El agente quntur: A research collaborator agent for quantum chemistry, 2026.
- [19] Changhyeok Choi, Yunheng Zou, Marcel Müller, Han Hao, Yeonghun Kang, Juan B. Pérez-Sánchez, Ignacio Gustin, Hanyong Xu, Mohammad Ghazi Vakili, Chris Crebolder, Alán Aspuru-Guzik, and Varinia Bernales. El agente estructural: An artificially intelligent molecular editor, 2026.
- [20] Sai Govind Hari Kumar, Yunheng Zou, Andrew Wang, Jesús Valdés-Hernández, Tsz Wai Ko, Nathan Yue, Olivia Leng, Hanyong Xu, Chris Crebolder, Alán Aspuru-Guzik, and Varinia Bernales. El agente sólido: A new age(nt) for solid state simulations, 2026.

- [21] Jiaru Bai, Yunheng Zou, Andrew Wang, Changhyeok Choi, Mohammad Ghazi Vakili, Hanyong Xu, Chris Crebolder, Varinia Bernales, and Alán Aspuru-Guzik. El agente gráfico: Structured execution graphs for scientific agents, 2026.
- [22] Alexey A Melnikov, Hendrik Poulsen Nautrup, Mario Krenn, Vedran Dunjko, Markus Tiersch, Anton Zeilinger, and Hans J Briegel. Active learning machine learns to create new quantum experiments. *Proceedings of the National Academy of Sciences*, 115(6):1221–1226, 2018. doi:10.1073/pnas.1714936115.
- [23] Tim Menke, Florian Häse, Simon Gustavsson, Andrew J Kerman, William D Oliver, and Alán Aspuru-Guzik. Automated discovery of superconducting circuits and its application to 4-local coupler design. *arXiv preprint arXiv:1912.03322*, 2019. doi:10.48550/arXiv.1912.03322.
- [24] Shuxiang Cao, Zijian Zhang, Mohammed Alghadeer, Simone D Fasciati, Michele Piscitelli, Mustafa Bakr, Peter Leek, and Alán Aspuru-Guzik. Agents for self-driving laboratories applied to quantum computing. *arXiv preprint arXiv:2412.07978*, 2024. doi:10.48550/arXiv.2412.07978.
- [25] Ludovico Mitchener, Angela Yiu, Benjamin Chang, Mathieu Bourdenx, Tyler Nadolski, Arvis Sulovari, Eric C Landsness, Daniel L Barabasi, Siddharth Narayanan, Nicky Evans, et al. Kosmos: An ai scientist for autonomous discovery. *arXiv preprint arXiv:2511.02824*, 2025. doi:10.48550/arXiv.2511.02824.
- [26] Sören Arlt, Xuemei Gu, and Mario Krenn. Towards autonomous quantum physics research using llm agents with access to intelligent tools. *arXiv preprint arXiv:2511.11752*, 2025. doi:10.48550/arXiv.2511.11752.
- [27] Mario Krenn, Yehonathan Drori, and Rana X Adhikari. Digital discovery of interferometric gravitational wave detectors. *Physical Review X*, 15(2):021012, 2025. doi:10.1103/physrevx.15.021012.
- [28] Cong Lu, Chao Lu, Robert T. Lange, et al. Towards end-to-end automation of AI research. *Nature*, 651:914–919, 2026. doi:10.1038/s41586-026-10265-5.
- [29] Sören Arlt, Haonan Duan, Felix Li, Sang Michael Xie, Yuhuai Wu, and Mario Krenn. Meta-designing quantum experiments with language models. *Nature Machine Intelligence*, pages 1–10, 2026. doi:10.1038/s42256-025-01153-0.
- [30] OpenAI. GPT-5.4 Thinking System Card. System card, 2026. URL <https://deploymentsafety.openai.com/gpt-5-4-thinking/gpt-5-4-thinking.pdf>. Accessed 2026-04-12.
- [31] Anthropic. Claude opus 4.6 system card. System card, 2026. URL <https://www.anthropic.com/system-cards>. Accessed 2026-04-12.
- [32] NVIDIA. Nemotron 3 super: Open, efficient mixture-of-experts hybrid mamba-transformer model for agentic reasoning, 2026.
- [33] Andrej Karpathy. autoresearch. GitHub repository, 2026. URL <https://github.com/karpathy/autoresearch>. Accessed 2026-03-26.
- [34] Alberto Peruzzo, Jarrod McClean, Peter Shadbolt, Man-Hong Yung, Xiao-Qi Zhou, Peter J. Love, Alán Aspuru-Guzik, and Jeremy L. O’Brien. A variational eigenvalue solver on a photonic quantum processor. *Nature Communications*, 5:4213, 2014. doi:10.1038/ncomms5213.
- [35] Jarrod R. McClean, Jonathan Romero, Ryan Babbush, and Alán Aspuru-Guzik. The theory of variational hybrid quantum-classical algorithms. *New Journal of Physics*, 18(2):023023, 2016. doi:10.1088/1367-2630/18/2/023023.
- [36] Yudong Cao, Jonathan Romero, Jonathan P. Olson, Matthias Degroote, Peter D. Johnson, Mária Kieferová, Ian D. Kivlichan, Tim Menke, Borja Peropadre, Nicolas P. D. Sawaya, Sukin Sim, Libor Veis, and Alán Aspuru-Guzik. Quantum chemistry in the age of quantum computing. *Chemical Reviews*, 119(19):10856–10915, 2019. doi:10.1021/acs.chemrev.8b00803.
- [37] Kishor Bharti, Alba Cervera-Lierta, Thi Ha Kyaw, Tobias Haug, Sumner Alperin-Lea, Abhinav Anand, Matthias Degroote, Hermann Heimonen, Jakob S Kottmann, Tim Menke, et al. Noisy intermediate-scale quantum algorithms. *Reviews of Modern Physics*, 94(1):015004, 2022. doi:10.1103/revmodphys.94.015004.
- [38] Stellan Östlund and Stefan Rommer. Thermodynamic limit of density matrix renormalization. *Physical Review Letters*, 75(19):3537–3540, 1995. doi:10.1103/PhysRevLett.75.3537.
- [39] Ulrich Schollwöck. The density-matrix renormalization group in the age of matrix product states. *Annals of Physics*, 326(1):96–192, 2011. doi:10.1016/j.aop.2010.09.012.
- [40] Román Orús. A practical introduction to tensor networks: Matrix product states and projected entangled pair states. *Annals of Physics*, 349:117–158, 2014. doi:10.1016/j.aop.2014.06.013.

- [41] R. Blankenbecler, D. J. Scalapino, and R. L. Sugar. Monte carlo calculations of coupled boson-fermion systems. I. *Physical Review D*, 24(8):2278–2286, 1981. doi:10.1103/PhysRevD.24.2278.
- [42] D. J. Scalapino and R. L. Sugar. Monte carlo calculations of coupled boson-fermion systems. II. *Physical Review B*, 24(8):4295–4308, 1981. doi:10.1103/PhysRevB.24.4295.
- [43] Shiwei Zhang and Henry Krakauer. Quantum monte carlo method using phase-free random walks with slater determinants. *Physical Review Letters*, 90(13):136401, 2003. doi:10.1103/PhysRevLett.90.136401.
- [44] C. Lanczos. An iteration method for the solution of the eigenvalue problem of linear differential and integral operators. *Journal of Research of the National Bureau of Standards*, 45(4):255–282, 1950. doi:10.6028/jres.045.026.
- [45] Tosio Kato. On the adiabatic theorem of quantum mechanics. *Journal of the Physical Society of Japan*, 5(6):435–439, 1950. doi:10.1143/JPSJ.5.435.
- [46] Edward Farhi, Jeffrey Goldstone, Sam Gutmann, and Michael Sipser. Quantum computation by adiabatic evolution, 2000.
- [47] S. Kirkpatrick, C. D. Gelatt Jr., and M. P. Vecchi. Optimization by simulated annealing. *Science*, 220(4598):671–680, 1983. doi:10.1126/science.220.4598.671.
- [48] D. R. Hartree. The wave mechanics of an atom with a non-coulomb central field. part ii. some results and discussion. *Mathematical Proceedings of the Cambridge Philosophical Society*, 24(1):111–132, 1928. doi:10.1017/S0305004100011920.
- [49] V. Fock. Näherungsmethode zur lösung des quantenmechanischen mehrkörperproblems. *Zeitschrift für Physik*, 61(1-2):126–148, 1930. doi:10.1007/BF01340294.
- [50] Steven R. White. Density matrix formulation for quantum renormalization groups. *Physical Review Letters*, 69(19):2863–2866, 1992. doi:10.1103/PhysRevLett.69.2863.
- [51] Steven R. White. Density-matrix algorithms for quantum renormalization groups. *Physical Review B*, 48(14):10345–10356, 1993. doi:10.1103/PhysRevB.48.10345.
- [52] Walter Ritz. Über eine neue methode zur lösung gewisser variationsprobleme der mathematischen physik. *Journal für die Reine und Angewandte Mathematik*, 135:1–61, 1909. doi:10.1515/crll.1909.135.1.
- [53] Shiwei Zhang, J. Carlson, and J. E. Gubernatis. Constrained path quantum monte carlo method for fermion ground states. *Physical Review Letters*, 74(18):3652–3655, 1995. doi:10.1103/PhysRevLett.74.3652.
- [54] W. A. Al-Saidi, Shiwei Zhang, and Henry Krakauer. Auxiliary-field quantum monte carlo calculations of molecular systems with a gaussian basis. *The Journal of Chemical Physics*, 124(22):224101, 2006. doi:10.1063/1.2200885.
- [55] Matthew Amy, Dmitri Maslov, and Michele Mosca. Polynomial-time t-depth optimization of clifford+t circuits via matroid partitioning. *IEEE Transactions on Computer-Aided Design of Integrated Circuits and Systems*, 33(10):1476–1489, 2014. doi:10.1109/TCAD.2014.2341953.
- [56] Kouhei Nakaji, Jonathan Wurtz, Haozhe Huang, Luis Mantilla Calderón, Karthik Panicker, Elica Kyoseva, and Alán Aspuru-Guzik. Quantum circuits as a game: A reinforcement learning agent for quantum compilation and its application to reconfigurable neutral atom arrays, 2025.
- [57] Harper R. Grimsley, Sophia E. Economou, Edwin Barnes, and Nicholas J. Mayhall. An adaptive variational algorithm for exact molecular simulations on a quantum computer. *Nature Communications*, 10(1):3007, 2019. doi:10.1038/s41467-019-10988-2.
- [58] Arthur G. Rattew, Shaohan Hu, Marco Pistoia, Richard Chen, and Steve Wood. A domain-agnostic, noise-resistant, hardware-efficient evolutionary variational quantum eigensolver, 2019.
- [59] Yuxuan Du, Tao Huang, Shan You, Min-Hsiu Hsieh, and Dacheng Tao. Quantum circuit architecture search for variational quantum algorithms. *npj Quantum Information*, 8(1):62, 2022. doi:10.1038/s41534-022-00570-y.
- [60] Alba Cervera-Lierta, Jakob S. Kottmann, and Alán Aspuru-Guzik. The meta-variational quantum eigensolver (meta-vqe): Learning energy profiles of parameterized hamiltonians for quantum simulation. *PRX Quantum*, 2(2):020329, 2021. doi:10.1103/PRXQuantum.2.020329.
- [61] Kouhei Nakaji, Lasse Bjørn Kristensen, Ryota Kemmoku, Jorge A. Campos-Gonzalez-Angulo, Mohammad Ghazi Vakili, Haozhe Huang, Mohsen Bagherimehrab, Christoph Gorgulla, FuTe Wong, Alex McCaskey, Jin-Sung Kim, Thien Nguyen, Pooja Rao, Qi Gao, Michihiko Sugawara, Naoki Yamamoto, and Alán Aspuru-Guzik. The generative quantum eigensolver (gqe) and its application for ground state search, 2024.

- [62] Fabian Finger, Frederic Rapp, Pranav Kalidindi, Kerry He, Kante Yin, Alexander Koziell-Pipe, David Zsolt Manrique, Gabriel Greene-Diniz, Stephen Clark, Hamza Fawzi, et al. Automated near-term quantum algorithm discovery for molecular ground states. *arXiv preprint arXiv:2603.26359*, 2026. doi:10.48550/arXiv.2603.26359.
- [63] Y.-Y. Shi, L.-M. Duan, and G. Vidal. Classical simulation of quantum many-body systems with a tree tensor network. *Physical Review A*, 74(2):022320, 2006. doi:10.1103/PhysRevA.74.022320.
- [64] G. Vidal. Entanglement renormalization. *Physical Review Letters*, 99(22):220405, 2007. doi:10.1103/PhysRevLett.99.220405.
- [65] F. Verstraete, V. Murg, and J. I. Cirac. Matrix product states, projected entangled pair states, and variational renormalization group methods for quantum spin systems. *Advances in Physics*, 57(2):143–224, 2008. doi:10.1080/14789940801912366.
- [66] Valentin Murg, Frank Verstraete, Reinhold Schneider, Peter R Nagy, and O Legeza. Tree tensor network state with variable tensor order: An efficient multireference method for strongly correlated systems. *Journal of Chemical Theory and Computation*, 11(3):1027–1036, 2015. doi:10.1021/ct501187j.
- [67] Toshiya Hikihara, Hiroshi Ueda, Kouichi Okunishi, Kenji Harada, and Tomotoshi Nishino. Automatic structural optimization of tree tensor networks. *Physical Review Research*, 5(1):013031, 2023. doi:10.1103/physrevresearch.5.013031.
- [68] Hai-Jun Liao, Jin-Guo Liu, Lei Wang, and Tao Xiang. Differentiable programming tensor networks. *Physical Review X*, 9(3):031041, 2019. doi:10.1103/physrevx.9.031041.
- [69] Hao Shi and Shiwei Zhang. Symmetry in auxiliary-field quantum monte carlo calculations. *Physical Review B—Condensed Matter and Materials Physics*, 88(12):125132, 2013. doi:10.1103/physrevb.88.125132.
- [70] Mingpu Qin, Hao Shi, and Shiwei Zhang. Coupling quantum monte carlo and independent-particle calculations: Self-consistent constraint for the sign problem based on the density or the density matrix. *Physical Review B*, 94(23):235119, 2016. doi:10.1103/physrevb.94.235119.
- [71] Ankit Mahajan, Joonho Lee, and Sandeep Sharma. Selected configuration interaction wave functions in phaseless auxiliary field quantum monte carlo. *The Journal of Chemical Physics*, 156(17), 2022. doi:10.1063/5.0087047.
- [72] Mingpu Qin. Self-consistent optimization of the trial wave function within the constrained path auxiliary field quantum monte carlo method using mixed estimators. *Physical Review B*, 107(23):235124, 2023. doi:10.1103/physrevb.107.235124.
- [73] Zoran Sukurma, Martin Schlipf, and Georg Kresse. Self-refinement of auxiliary-field quantum monte carlo via non-orthogonal configuration interaction. *Journal of Chemical Theory and Computation*, 21(9):4481–4493, 2025. doi:10.1021/acs.jctc.5c00127.
- [74] Alán Aspuru-Guzik, Anthony D. Dutoi, Peter J. Love, and Martin Head-Gordon. Simulated quantum computation of molecular energies. *Science*, 309(5741):1704–1707, 2005. doi:10.1126/science.1113479.
- [75] Philipp Schleich, Luis Mantilla Calderón, Chong Sun, Mohsen Bagherimehrab, Abdulrahman Aldossary, Jakob S. Kottmann, and Alán Aspuru-Guzik. *Quantum Computing for Quantum Chemistry*. ACS In Focus. American Chemical Society, 2025. ISBN 9780841295964. doi:10.1021/acsinfocus.7e9012.
- [76] Pascual Jordan and Eugene Wigner. Über das paulische äquivalenzverbot. *Zeitschrift für Physik*, 47(9–10): 631–651, 1928. doi:10.1007/BF01331938.
- [77] Jarrod R. McClean, Nicholas C. Rubin, Kevin J. Sung, Ian D. Kivlichan, Nathan Wiebe, Peter J. Love, Alán Aspuru-Guzik, et al. OpenFermion: The electronic structure package for quantum computers. *Quantum Science and Technology*, 5(3):034014, 2020. doi:10.1088/2058-9565/ab8ebc.
- [78] Qiming Sun, Timothy C. Berkelbach, Nick S. Blunt, George H. Booth, Sheng Guo, Zhendong Li, Junzi Liu, James D. McClain, Elvira R. Sayfutyarova, Sandeep Sharma, Sebastian Wouters, and Garnet Kin-Lic Chan. PySCF: The python-based simulations of chemistry framework. *WIREs Computational Molecular Science*, 8(1): e1340, 2018. doi:10.1002/wcms.1340.
- [79] Jarrod R. McClean, Sergio Boixo, Vadim N. Smelyanskiy, Ryan Babbush, and Hartmut Neven. Barren plateaus in quantum neural network training landscapes. *Nature Communications*, 9(1), 2018. doi:10.1038/s41467-018-07090-4.
- [80] M. Cerezo, Akira Sone, Tyler Volkoff, Lukasz Cincio, and Patrick J. Coles. Cost function dependent barren plateaus in shallow parametrized quantum circuits. *Nature Communications*, 12(1), 2021. doi:10.1038/s41467-021-21728-w.

- [81] Michael Ragone, Bojko N. Bakalov, Frédéric Sauvage, Alexander F. Kemper, Carlos Ortiz Marrero, Martín Larocca, and M. Cerezo. A lie algebraic theory of barren plateaus for deep parameterized quantum circuits. *Nature Communications*, 15(1), 2024. doi:10.1038/s41467-024-49909-3.
- [82] Enrico Fontana, Dylan Herman, Shouvanik Chakrabarti, Niraj Kumar, Romina Yalovetzky, Jamie Heredge, Shree Hari Sureshababu, and Marco Pistoia. Characterizing barren plateaus in quantum ansätze with the adjoint representation. *Nature Communications*, 15(1), 2024. doi:10.1038/s41467-024-49910-w.
- [83] GSOpt Logs. [Online]. Available: <https://github.com/bestquark/gsopt/blob/main/experiments/logs.pdf>.
- [84] Johnnie Gray. quimb: A python package for quantum information and many-body calculations. *Journal of Open Source Software*, 3(29):819, 2018. doi:10.21105/joss.00819.
- [85] Guifré Vidal. Efficient classical simulation of slightly entangled quantum computations. *Physical Review Letters*, 91(14):147902, 2003. doi:10.1103/PhysRevLett.91.147902.
- [86] Guifré Vidal. Efficient simulation of one-dimensional quantum many-body systems. *Physical Review Letters*, 93(4):040502, 2004. doi:10.1103/PhysRevLett.93.040502.
- [87] W. M. C. Foulkes, L. Mitas, R. J. Needs, and G. Rajagopal. Quantum monte carlo simulations of solids. *Reviews of Modern Physics*, 73(1):33–83, 2001. doi:10.1103/RevModPhys.73.33.
- [88] Fionn D. Malone, Ankit Mahajan, James S. Spencer, and Joonho Lee. ipie: A python-based auxiliary-field quantum monte carlo program with flexibility and efficiency on cpus and gpus. *Journal of Chemical Theory and Computation*, 19(1):109–121, 2023. doi:10.1021/acs.jctc.2c00934.
- [89] Tong Jiang, Moritz K. A. Baumgarten, Pierre-François Loos, Ankit Mahajan, Anthony Scemama, Shu Fay Ung, Jinghong Zhang, Fionn D. Malone, and Joonho Lee. Improved modularity and new features in ipie: Toward even larger afqmc calculations on cpus and gpus at zero and finite temperatures. *The Journal of Chemical Physics*, 161(16):162502, 2024. doi:10.1063/5.0225596.
- [90] Matthias Troyer and Uwe-Jens Wiese. Computational complexity and fundamental limitations to fermionic quantum monte carlo simulations. *Physical Review Letters*, 94(17):170201, 2005. doi:10.1103/PhysRevLett.94.170201.
- [91] E. Y. Loh, J. E. Gubernatis, R. T. Scalettar, S. R. White, D. J. Scalapino, and R. L. Sugar. Sign problem in the numerical simulation of many-electron systems. *Physical Review B*, 41(13):9301–9307, 1990. doi:10.1103/PhysRevB.41.9301.
- [92] Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language models. *arXiv preprint arXiv:2001.08361*, 2020. doi:10.48550/arXiv.2001.08361.
- [93] R. L. Stratonovich. On a method of calculating quantum distribution functions. *Soviet Physics Doklady*, 2: 416–419, 1958. Translated from Doklady Akademii Nauk SSSR 115, 1097–1100 (1957).
- [94] J. Hubbard. Calculation of partition functions. *Physical Review Letters*, 3(2):77–78, 1959. doi:10.1103/PhysRevLett.3.77.
- [95] H. F. Trotter. On the product of semi-groups of operators. *Proceedings of the American Mathematical Society*, 10(4):545–551, 1959. doi:10.1090/S0002-9939-1959-0108732-6.
- [96] D. J. Thouless. Stability conditions and nuclear rotations in the hartree-fock theory. *Nuclear Physics*, 21:225–232, 1960. doi:10.1016/0029-5582(60)90048-1.

Supplemental Material

Appendix A. Autoresearch details

A1. VQE autoresearch details

In this variational-circuit benchmark, the ground-state search follows the Rayleigh–Ritz principle: a parameterized circuit prepares $|\psi(\theta)\rangle = U(\theta)|\phi_{\text{HF}}\rangle$, a classical optimizer updates θ , and lower energy implies a better ground-state approximation. The Hamiltonian, basis, and active space are fixed; the agent instead mutates the reusable building blocks of the solver itself, namely the ansatz family and connectivity, parameter-tying scheme, initialization scale and reference-state details, and the optimizer policy with its tolerances, step sizes, step cap, and seed. Table S1 should therefore be read as edits to those few components rather than as changes to the physical target.

Experimental setup The four VQE targets are neutral singlets in the STO-3G basis built from closed-shell RHF orbitals and mapped to qubits with the Jordan–Wigner transform (76). The molecular geometries (in Angstrom) are BH: B(0, 0, 0), H(0, 0, 1.23); LiH: Li(0, 0, 0), H(0, 0, 1.57); BeH₂: H(0, 0, -1.326), Be(0, 0, 0), H(0, 0, 1.326); and H₂O: O(0, 0, 0), H(0, 0.757, 0.587), H(0, -0.757, 0.587). The corresponding active spaces are CAS(2,3), CAS(2,4), CAS(4,4), and CAS(6,4), respectively, all built from contiguous RHF orbital windows. Fig. 4 shows the active orbital windows, Table S1 stores the baseline and best archived protocol values, and the full 100-iteration mutation logs are collected in the external log supplement (83).

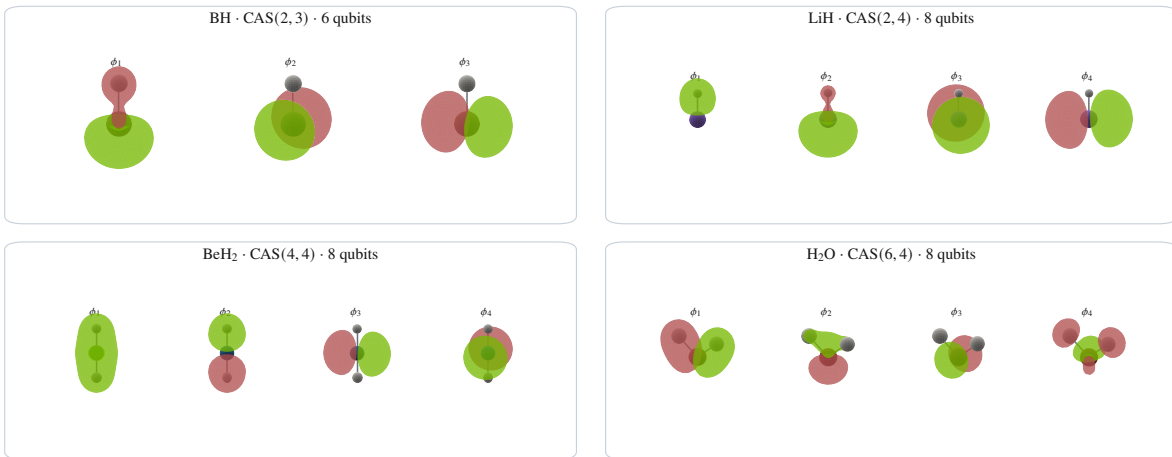


Figure 4 Active-orbital gallery for the four VQE benchmark molecules used in the main text: BH, LiH, BeH₂, and H₂O. Each panel shows the active-space molecular orbitals used to construct the corresponding CAS Hamiltonian, with positive and negative orbital lobes colored separately.

Table S1 Baseline and best archived VQE protocols for the four molecular campaigns. A/R denotes accepted/rejected counts.

Molecule	A/R	Protocol	Ansatz / Parameterization	Optimizer and Key Settings	Final $ \Delta E $ [Ha]
BH	49/51	Initial	hea_ryrz_ring; $L = 2$.	cobyala; steps 4096; init scale 0.1; seed 42.	2.564×10^{-1}
		Best (Iter. 40)	uccsd; warm start $n = 8$.	cobyala; steps 4096; init scale 0; seed 1040; rhobeg 1.0e-4.	3.553×10^{-14}
LiH	23/77	Initial	hea_ryrz_ring; $L = 2$.	cobyala; steps 4096; init scale 0.1; seed 42.	2.956×10^{-1}
		Best (Iter. 64)	uccsd; param. uccsd_full; warm start $n = 15$.	powell; steps 4096; init scale 0; seed 42; xtol 1.0e-7.	5.085×10^{-12}
BeH ₂	77/23	Initial	hea_ryrz_ring; $L = 2$.	cobyala; steps 4096; init scale 0.1; seed 42.	4.446×10^{-1}
		Best (Iter. 100)	uccsd; warm start $n = 26$.	cobyala; steps 4096; init scale 0; seed 5100; rhobeg 1.0e-4.	6.721×10^{-7}
H ₂ O	30/70	Initial	hea_ryrz_ring; $L = 2$.	cobyala; steps 4096; init scale 0.1; seed 42.	1.116×10^0
		Best (Iter. 77)	uccsd; param. uccsd_full.	cobyala; steps 4096; init scale 6.3e-4; seed 257.	3.543×10^{-6}

A2. Tensor-network autoresearch details

Here, the wavefunction is represented as a one-dimensional matrix product state, and the energy is reduced via local variational DMRG sweeps, with intermediate Schmidt spectra truncated to control the bond dimension. In the current fixed-budget benchmark, the mutable building blocks are the DMRG workflow itself (DMRG1, DMRG2, and staged warm-start variants, where applicable), the initial state, the bond-dimension schedule, the truncation cutoff, the eigensolver tolerance, and the sweep schedule. In Quimb, DMRG1 and DMRG2 denote one-site and two-site DMRG updates, respectively (84; 50; 51). Table S2 therefore summarizes edits to initialization, bond control, and update policy under a fixed $L = 64$ spin-chain Hamiltonian.

Experiment setup. The active tensor-network suite uses four open-boundary spin-1/2 chains at $L = 64$: Heisenberg XXX with $(J_x, J_y, J_z, h_x, h_z) = (1, 1, 1, 0, 0)$, gapless XXZ with $(1, 1, 0.5, 0, 0)$, critical TFIM with $(0, 0, 1, 0.5, 0)$, and critical XX with $(1, 1, 0, 0, 0)$. Each model is paired with a frozen high-accuracy DMRG2 MPS reference state, from which both the reference energy and the mutual-information matrix are extracted. Fig. 5 shows the frozen reference mutual-information structure, Table S2 stores the baseline and best archived protocol values, and the full 100-iteration mutation logs are collected in the external log supplement (83).

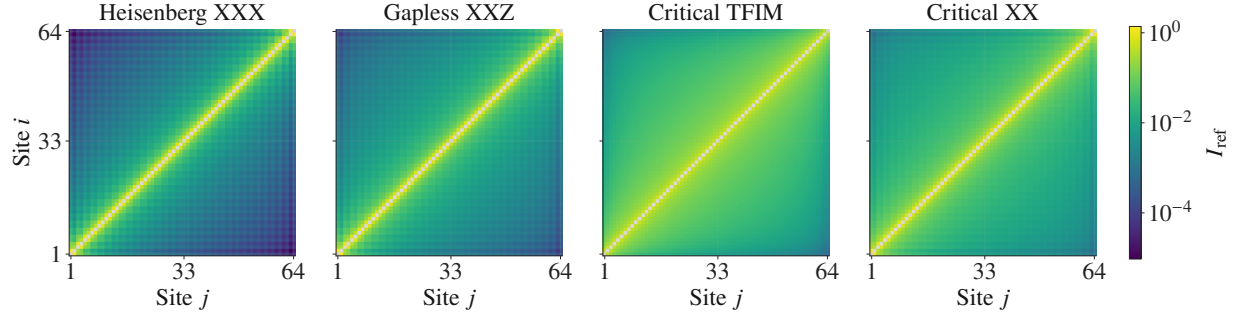


Figure 5 Frozen reference mutual-information matrices for the four one-dimensional critical $L = 64$ tensor-network benchmarks. Each panel shows I_{ij}^{ref} for the corresponding high-accuracy DMRG2 MPS reference state, with the diagonal masked in gray.

Table S2 Baseline and best archived tensor-network protocols for the four $L = 64$ campaigns. A/R denotes accepted/rejected counts. Energies are total Hamiltonian energies in the dimensionless model units set by each spin-chain Hamiltonian.

Model	A/R	Protocol	Method / Initial State	Bond and Solver Settings	Final Energy [model units]
Heisenberg XXX	12/88	Initial	dmrg1; init random, init bond 2.	bond 4-6-8; cutoff 1.0e-6; tol 0.001; sweeps 6; ncv 4.	-28.165820
		Best (Iter. 88)	dmrg2; init neel, init bond 8.	bond 8-12-16-24-32-48-64-80-96; cutoff 1.0e-14; tol 1.0e-7; sweeps 19; ncv 6.	-28.175425
Gapless XXZ	54/46	Initial	dmrg1; init random, init bond 2.	bond 4-6-8; cutoff 1.0e-6; tol 0.001; sweeps 6; ncv 4.	-23.816607
		Best (Iter. 100)	dmrg1→dmrg2; init neel→neel.	warm: bond 8-12-16-24-32-48; cutoff 1.0e-9; tol 1.0e-5; sweeps 5; refine: bond 148-192; cutoff 4.8e-14; tol 1.0e-6; sweeps 5.	-23.828520
Critical TFIM	6/94	Initial	dmrg1; init random, init bond 2.	bond 4-6-8; cutoff 1.0e-6; tol 0.001; sweeps 6; ncv 4.	-20.281472
		Best (Iter. 34)	dmrg2→dmrg1; init plus→minus.	warm: bond 8-12-16-24-32-48-64-80-96; cutoff 1.0e-10; tol 1.0e-7; sweeps 18; refine: bond 48-64-80; cutoff 1.0e-10; tol 5.0e-7; sweeps 12.	-20.281495
Critical XX	17/83	Initial	dmrg1; init random, init bond 2.	bond 4-6-8; cutoff 1.0e-6; tol 0.001; sweeps 6; ncv 4.	-20.179132
		Best (Iter. 94)	dmrg2; init random, init bond 1.	bond 8-12-16-24-32-48-64-80-96; cutoff 1.0e-10; tol 1.0e-5; sweeps 23; ncv 12.	-20.192157

A3. AFQMC autoresearch details

This benchmark uses an imaginary-time projector method built around a population of Slater-determinant walkers. In this work, the *auxiliary-field* quantum Monte Carlo (AFQMC) implementation is provided by

ipie (88; 89), which exposes modular trial, walker, and propagation components and supports both CPU execution and CUDA/CuPy-based GPU acceleration on NVIDIA hardware (89). In an orbital basis, one first writes the electronic Hamiltonian as a one-body part plus a factorized two-body part,

$$\hat{H} = \hat{H}_1 - \frac{1}{2} \sum_{\gamma} \hat{v}_{\gamma}^2 + E_0, \quad (12)$$

where each $\hat{v}_{\gamma}$ is a one-body operator obtained from a Cholesky or density-fitted factorization of the two-electron integrals, for example $\hat{v}_{\gamma} = \sum_{pq} L_{pq}^{\gamma} a_p^{\dagger} a_q$, so $\hat{v}_{\gamma}^2$ means the operator product $\hat{v}_{\gamma} \hat{v}_{\gamma}$ whose sum over γ reconstructs the factorized two-body term. Constant or residual one-body shifts are absorbed into $\hat{H}_1$ and E_0 . The method is called *auxiliary-field* quantum Monte Carlo or AFQMC because the quadratic two-body term is linearized by a Hubbard–Stratonovich transformation (93; 94; 41; 42),

$$e^{-\Delta\tau \hat{H}_2} = e^{\frac{\Delta\tau}{2} \sum_{\gamma} \hat{v}_{\gamma}^2} = \int d\mathbf{x} p(\mathbf{x}) e^{\sqrt{\Delta\tau} \sum_{\gamma} x_{\gamma} \hat{v}_{\gamma}}, \quad (13)$$

with $p(\mathbf{x})$ a standard normal density over the auxiliary fields $\mathbf{x}$.

Using the second-order Trotter factorization (95), one short imaginary-time step has the schematic form

$$e^{-\Delta\tau \hat{H}} = e^{-\frac{\Delta\tau}{2} \hat{H}_1} \left[\int d\mathbf{x} p(\mathbf{x}) e^{\sqrt{\Delta\tau} \sum_{\gamma} x_{\gamma} \hat{v}_{\gamma}} \right] e^{-\frac{\Delta\tau}{2} \hat{H}_1} + O(\Delta\tau^3), \quad (14)$$

so each walker update is

$$|\phi'\rangle = \hat{B}(\mathbf{x})|\phi\rangle, \quad \hat{B}(\mathbf{x}) = e^{-\frac{\Delta\tau}{2} \hat{H}_1} e^{\sqrt{\Delta\tau} \sum_{\gamma} x_{\gamma} \hat{v}_{\gamma}} e^{-\frac{\Delta\tau}{2} \hat{H}_1}. \quad (15)$$

Because $\hat{B}(\mathbf{x})$ is a one-body propagator for fixed $\mathbf{x}$, a Slater determinant remains a Slater determinant after each step. This is the practical content of the Thouless theorem in the AFQMC setting: exponentials of one-body operators generate the manifold of nonorthogonal Slater determinants from a reference determinant (96). In the autoresearch loop (c.f. Table S3), the agent mutates the trial family, orbital representation, Cholesky cutoff, imaginary-time step $\Delta\tau$, walker population, block geometry $B = N_{\text{steps}} \times N_{\text{blocks}}$, stabilization and population-control cadence $s/p = a/b$, and molecule-specific trial settings. Here **walkers/rank** denotes the local walker population per MPI rank or GPU worker, so $N_w = N_{\text{rank}} \times (\text{walkers/rank})$, while **chol cut** is the truncation threshold used to build the Cholesky vectors defining $\hat{v}_{\gamma}$.

Experiment setup. The active AFQMC suite uses H_2 , LiH , H_2O , and N_2 as neutral singlets in the STO-3G basis, with offline CCSD(T) references used only for post hoc comparison. Table S3 stores the baseline and best archived protocol values, and the full mutation logs are collected in the external log supplement (83).

Table S3 Baseline and best archived AFQMC protocols for the four molecular campaigns. A/R denotes accepted/rejected counts.

Molecule	A/R	Protocol	Trial / SCF Settings	Walker and Propagation Settings	Live Score
H ₂	9/91	Initial	rhf; scf tol 1.0e-7; max cycle 64; diis 8.	32 walkers/rank; $B = 25 \times 40$; $\Delta\tau = 0.005$; chol cut 1.0e-5; $s/p = 5/5$.	-1.120937
		Best (Iter. 80)	rhf; scf tol 1.0e-7; max cycle 64; diis 8.	320 walkers/rank; $B = 80 \times 20$; $\Delta\tau = 0.0025$; chol cut 1.0e-8; $s/p = 8/8$.	-1.134068
LiH	30/70	Initial	rhf; scf tol 1.0e-7; max cycle 64; diis 8.	32 walkers/rank; $B = 25 \times 40$; $\Delta\tau = 0.005$; chol cut 1.0e-5; $s/p = 5/5$.	-7.865619
		Best (Iter. 96)	uhf; scf tol 1.0e-7; max cycle 64; diis 8.	128 walkers/rank; $B = 24 \times 35$; $\Delta\tau = 0.007569$; chol cut 1.0e-5; $s/p = 1/2$.	-7.876347
H ₂ O	32/68	Initial	rhf; scf tol 1.0e-7; max cycle 64; diis 8.	32 walkers/rank; $B = 25 \times 40$; $\Delta\tau = 0.005$; chol cut 1.0e-5; $s/p = 5/5$.	-74.989938
		Best (Iter. 94)	uhf; scf tol 1.0e-7; max cycle 64; diis 8.	512 walkers/rank; $B = 25 \times 34$; $\Delta\tau = 0.003764$; chol cut 1.0e-5; $s/p = 5/4$.	-75.004519
N ₂	15/85	Initial	rhf; scf tol 1.0e-7; max cycle 64; diis 8.	32 walkers/rank; $B = 25 \times 40$; $\Delta\tau = 0.005$; chol cut 1.0e-5; $s/p = 5/5$.	-107.465564
		Best (Iter. 89)	rhf; scf tol 1.0e-7; max cycle 64; diis 8.	512 walkers/rank; $B = 26 \times 29$; $\Delta\tau = 0.003822$; chol cut 1.0e-5; $s/p = 5/4$.	-107.620504