

Rethinking How to Act: Action-Space Engineering for Reinforcement Learning-Based Circuit Routing in Distributed Quantum Systems

Joost van Veen
Quantum & Computer Engineering
Delft University of Technology
Delft, The Netherlands
j.j.vanveen@student.tudelft.nl

Luise Prielinger
Quantum & Computer Engineering
Delft University of Technology
Delft, The Netherlands
l.p.prielinger@tudelft.nl

Sebastian Feld
Quantum & Computer Engineering
Delft University of Technology
Delft, The Netherlands
s.feld@tudelft.nl

Abstract—As it becomes increasingly difficult to monolithically scale a quantum processor, distributed quantum computing (DQC) offers an alternative by distributing qubits across multiple smaller interconnected quantum processor modules. In such an architecture, the challenge of quantum circuit compilation shifts from placing and routing qubits within one module to placing, routing and using the qubits efficiently across modules. In order to optimize circuit execution time, the right state-dependent networking decisions must be found, such as when and where to generate shared remote quantum states to support remote operations.

Reinforcement learning (RL) provides a natural framework for this problem, generating a compilation policy that can generalize across different circuits. Building on the framework of Promponas et al. (2024), we introduce an agent that combines a novel action-space formulation with effective action-masking strategies. A comprehensive numerical comparison of the two approaches under different coupling constraints shows that our agent achieves improved training and inference performance with a relative reduction in the modeled execution time of up to 35%.

Index Terms—Distributed quantum computing, Quantum networking, Quantum circuit compilation, Reinforcement learning

I. INTRODUCTION

Sufficiently large, fault-tolerant quantum computers will have significant implications for various fields, ranging from fundamental physics [12], over cryptography [25] to chemistry and drug discovery [4]. On today’s quantum computers, however, short-lived coherence times and imperfect control constrain computations to circuits that are still too shallow to be useful [10], [23]. We will need quantum error correction [30], encoding a logical qubit into *many* physical qubits in order to make quantum computation fault-tolerant. However, monolithic scaling, i.e., adding ever more qubits to a single processor, is limited by the growing complexity of qubit control and calibration, as well as increased crosstalk and unwanted couplings that introduce correlated errors [7]. A promising alternative route to increasing the number of qubits in a single processor is interconnecting multiple smaller and therefore better controllable modules into a modular architecture [5], [18]–[20], drawn in Fig. 1. Here, quantum operations

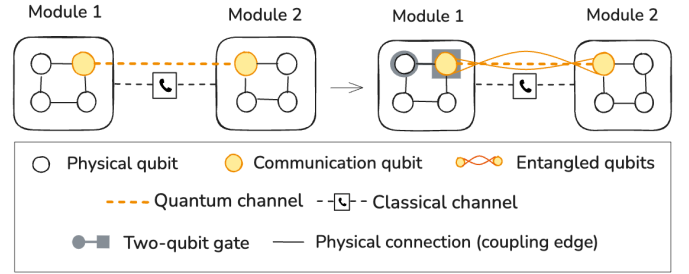


Fig. 1: An entangled state is generated between two remote qubits used as communication qubits connected via a quantum channel and heralded by a classical message sent over a classical channel. Within each module, local two-qubit gates can be applied between all qubits according to the available connectivity (physical coupling edges).

span networked quantum modules linked by quantum and classical communication channels. When shared inter-module quantum states are realized as maximally entangled qubit-pairs, i.e., Einstein-Podolsky-Rosen (EPR) pairs [9], then the rate at which they can be generated is typically much slower than the rate at which single- or two-qubit gates can be executed. For example, in many solid-state platforms such as Nitrogen-vacancy centers [14], [15], an heralded remote entangled state between two meter-spaced modules is established only at 10Hz to 40Hz, whereas a local single-qubit electron-spin rotation is set by microwave Rabi rates of order 10 MHz, and electron-nuclear two-qubit gates are typically implemented with dynamical-decoupling sequences of a few kHz. Thus, compared to monolithic compilation, distributed circuit compilation must not only satisfy local connectivity constraints within each module, but also decide how to realize non-local interactions through remote EPR pairs that are much more limited in their generation rate.

Early work in distributed circuit compilation has largely focused on static qubit placement, i.e., the initial assignment of each virtual qubit in the circuit to a physical qubit in a module, and the minimization of inter-module interaction

in order to reduce the number of entangled inter-module states. Approaches in this line typically split the quantum circuit into discrete time stages. At each stage, a so-called interaction graph is derived from concurrent multi-qubit gates, with an edges encoding pairwise interaction. The set of qubits is then partitioned into modules and assigned down to the physical qubits, which can be achieved by solving the graph-partitioning problem and (sub)graph isomorphism problem, respectively [1]–[3]. In these works, inter-module communication is typically collapsed into a single scalar cost of inter-module communication counts. Such an abstraction captures the amount of non-local operations, but no network dynamics. Advancing this line of research, several works develop network-aware methods that explicitly account for EPR-pair generation and routing of qubits within and between modules. For example, Cuomo et al. [6] formulate the routing task as a flow problem with capacity-limited entanglement links; a solution then selects, in each round, a maximal feasible set of tele-gates (those are gates that are executed between two modules; thereby consuming an EPR pair). Or, Ferrari et al. [11] first partition the circuit, place each partition on a module, and then schedule remote operations, and finally compiling locally using conventional intra-module routing strategies, such as inserting SWAP gates along shortest paths [17]. Most recent work further extends these approaches by integrating coherence times and probabilistic EPR-pair generation, thereby producing compilation decisions that pertain to the underlying network dynamics [26]. However, they still rely on heuristics that may require long execution times to obtain good solutions, and this cost must be paid per circuit.

As an effective alternative, reinforcement learning (RL) can be used to iteratively learn a strategy that naturally generalizes across multiple circuits seen during training. Depending on the model size and hyperparameters, training a neural network can be computationally expensive [13], potentially even more so than executing the aforementioned heuristics. However, once trained, the cost of applying the learned policy to new circuits is typically much lower than using previously described approaches. When compiling many circuits, therefore, there will always be a regime in which the total time spent on training and compilation is lower than that of repeatedly invoking computationally intensive non-learning algorithms.

Furthermore, reinforcement learning has already shown promising results in qubit routing in non-distributed architectures. For example, Tang et al. [29] introduce AlphaRouter, a hybrid approach that combines RL with tree search; and Pozzi et al. employ an agent without any auxiliary search [22]. In benchmark evaluations, both approaches outperform standard and state-of-the-art heuristic routers, including SABRE [17]. In addition, RL has recently been studied for the first time for routing quantum circuits in a distributed IBM quantum architecture by Promponas et al. [24]. In their work, the compilation task is formulated as a general Markov decision process and subsequently approximated in a first numerical implementation.

While this formulation provides a flexible framework for

studying distributed quantum circuit routing with reinforcement learning, it raises the question of which design choices can be improved to increase performance. RL depends strongly on the structure of the action space, the efficiency of exploration, and the computational cost of training. These considerations motivate the search for formulations that preserve validity of the approach while improving its scalability. In this context, the present work introduces a novel action-space formulation, as well as action masking strategies and efficient Q-value approximation, with the goal of improving both training behavior and inference performance within the framework introduced by Promponas et al. [24]. In our numerical assessment, we use the latter as baseline and show that our approach requires less wall-clock training time while achieving better inference performance in all considered settings. We base our analysis on a set of randomly generated quantum circuits varying gate count and executed on two hardware graphs that differ significantly in their connectivity.

The remainder of this paper is organized as follows. Section II describes the quantum circuit and system model. Section III introduces the reinforcement-learning framework. Section IV presents our approach in detail and Section V provides the numerical evaluation.

II. QUANTUM CIRCUIT AND SYSTEM MODEL

A quantum computation system executes quantum logic as sequences of single- and multi-qubit operations, collectively referred to as quantum circuits. These circuits are often represented as directed acyclic graphs (DAGs). Fig. 2 depicts an example of a quantum circuit represented as DAG. We adopt the representation of Promponas et al. [24] and define a DAG $:= (V_g, E_g)$, where V_g is the set of gates and E_g encodes precedence constraints as directed edges between gates. More specifically, a directed edge $(u, v) \in E_g$ means that operation v is constrained to occur after operation u in every valid schedule. For example, in Fig. 2, the two operations (H on q_0) and (CNOT $q_0 \rightarrow q_1$) must be executed subsequently as they act on the same qubit q_0 . On the other hand, the operations (H on q_0) and (X on q_2) form a so-called *layer* in this example circuit, as they can be executed in parallel. More generally, a layer ℓ_d is a subset of gates $\ell_d \subseteq V_g$ such that for all distinct $u, v \in \ell_d$, (i) the gates do not overlap, i.e., $\text{supp}(u) \cap \text{supp}(v) = \emptyset$, and (ii) there is no dependency edge between them, i.e., $(u, v) \notin E_g$ and $(v, u) \notin E_g$. Equivalently, layers are non overlapping sets of gates that group gates at the same logical circuit depth d , so that all gates in a layer can be executed in parallel. We also refer to the first layer, where $d = 1$, also as *frontier*.

To compile such a circuit description on a specific hardware platform, the circuit must satisfy the connectivity constraints of the target architecture. Conventionally, the hardware connectivity is represented by a coupling graph

$$G = (V, E), \text{ with } E = E_n \cup E_c, \text{ and } E_n \cap E_c = \emptyset, \quad (1)$$

with V denoting the set of physical qubits. An edge in E_c represents a channel between two remote qubits, see

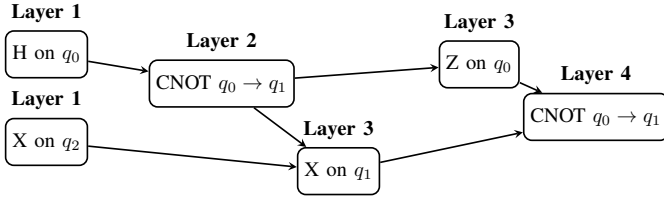


Fig. 2: DAG of a quantum circuit encoding precedence constraints of quantum operations. Operations in the same layer can be executed in parallel.

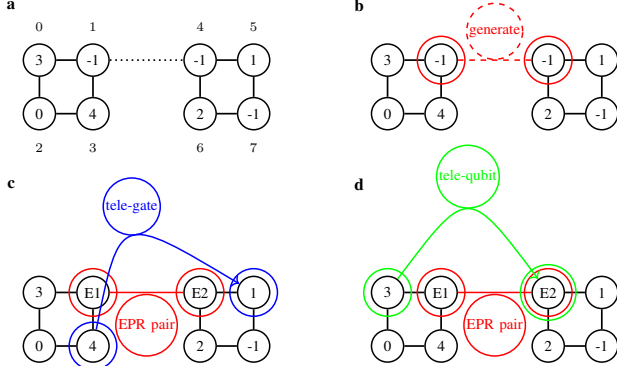


Fig. 3: Panel (a) shows the qubit mapping: Annotated values $\{0, \dots, n-1\}$ denote physical qubit indices, while the value inside a node indicates the virtual qubit mapped onto the physical qubit; -1 implies a non-initialized physical qubit. In (b), the generate action creates an EPR pair on a pair of non-initialized remote communication qubits. Panel (c) visualizes a tele-gate execution and (d) visualizes a tele-qubit action.

Fig. 1. The edge set E_n denotes the coupling connections in a module enabling local operations. We assume that all local operations take some constant duration to execute, which we denote t_{local} . We note that remote entanglement generation over a quantum channel is inherently stochastic: each attempt succeeds with probability $p_{\text{gen}} < 1$ and otherwise must be repeated. We adopt a standard abstraction [14], [24], [28] and treat entanglement generation as deterministic with a fixed latency t_{gen} , approximating the mean waiting time of a repeat-until-success protocol, $t_{\text{gen}} := t_0/p_{\text{gen}}$, where t_0 is the duration of a single heralded entanglement generation attempt.

A. Remote quantum logic

Once an EPR pair has been established between two remote physical qubits, the hardware can realize non-local primitives. In particular, we assume the considered system supports (i) *tele-qubits* (Definition II.1), which teleport an arbitrary qubit state between modules, and (ii) *tele-gates* (Definition II.2), which implement a non-local CNOT gate [21]. Figures 3(c) and (d) visually explain the described primitives. Executing a tele-gate and tele-qubit are approximated to take the same constant time, denoted t_{remote} .

Definition II.1 (Tele-qubit). *Let q be a virtual qubit residing on a physical qubit in QPU 1. Let $(E1, E2)$ be an EPR pair shared between the communication qubits on QPU 1 and*

QPU 2. The following operation transfers the quantum state of q to E2 via: 1) Apply $\text{CNOT}_{q \rightarrow E1}$. 2) Apply a Hadamard gate H to q . 3) Measure q and E1 in the computational (Z) basis, obtaining $m_1, m_2 \in \{0, 1\}$. 4) Send (m_1, m_2) to QPU 2 over a classical channel. 5) On QPU 2, apply the Pauli correction $X^{m_2} Z^{m_1}$ to E2.

Definition II.2 (Tele-gate). *Let c (control) be a virtual qubit residing on a physical qubit in QPU 1 and let t (target) be a virtual qubit residing on a physical qubit in QPU 2. Let $(E1, E2)$ be an EPR pair shared between the communication qubits on QPU 1 and QPU 2. The following operation implements a non-local CNOT from c to t via: 1) Apply $\text{CNOT}_{c \rightarrow E1}$. 2) Measure E1 in the computational (Z) basis, obtaining $m \in \{0, 1\}$. 3) Send m to QPU 2 over a classical channel. 4) On QPU 2, apply the Pauli correction X^m to E2. 5) Apply $\text{CNOT}_{E2 \rightarrow t}$. 6) Measure E2 in the X basis, obtaining $m' \in \{0, 1\}$. 7) Send m' to QPU 1 over a classical channel. 8) Apply the Pauli correction $Z^{m'}$ to c .*

III. REINFORCEMENT LEARNING FOR DQC

In this section we (A) introduce important concepts of the used machine learning approach, according to standard notation [27] and (B) outline the baseline framework [24].

A. Important deep learning concepts

Reinforcement learning (RL) is a type of machine learning where an agent learns to achieve a goal by interacting with an environment through applying actions. Unlike supervised learning, where models learn from labeled datasets, RL learns from experience through trial and error. At each step, the agent observes the current state of the environment, selects an action and receives feedback in the form of a reward along with a new state. The agent's objective is to select actions which maximize the expected sum of future rewards over time. Formally, it keeps an estimate of the so-called Q-function $Q(s, a)$, which maps each state-action pair (s, a) to the expected cumulative reward obtained when taking action a in a state s and following the current policy thereafter. In environments with large state spaces, it becomes computationally infeasible to represent and update all Q-values. Instead, the Q-function is approximated $\tilde{Q}(s, a; \theta)$ using a multi-layered neural network (NN); the NN takes a state s as input and returns an estimated Q-value for a given action a . Here, θ is the collection of all trainable parameters of the neural network, such as its weights and biases. In Deep Q-Networks (DQN) a separate target network is used as follows: for a transition (s, a, r, s') from a current state s to the next state s' given an action a with immediate scalar reward r , the target y is

$$y = \begin{cases} r, & \text{if } s' \text{ is terminal,} \\ r + \gamma \max_{a'} \tilde{Q}(s', a'; \theta^-), & \text{otherwise,} \end{cases} \quad (2)$$

where $\gamma \in [0, 1)$ is the discount factor and a' presents the next action. This target network uses a delayed copy θ^- of the main Q-network's parameters and is updated at fixed intervals. Without this mechanism, the Q-values could become unstable

because the network would be learning from targets that are themselves changing too quickly. To further stabilize training, DQN does not learn after each action, instead it stores its experience in a so-called replay buffer $\mathcal{D}$ and learns from a random set of samples of recent experiences. This reduces the correlation between consecutive experiences, which are typically more similar to one another than randomly sampled experiences from the replay buffer. Learning directly from temporally adjacent transitions, in fact, can cause updates to be inadequately influenced by short-term local patterns in the environment, which is undesirable. With these definitions, we can denote the loss function L as the mean squared error between the current Q-value and the target:

$$L(\theta) = \mathbb{E}_{(s,a,r,s') \sim \mathcal{D}} \left[(y - \tilde{Q}(s,a;\theta))^2 \right], \quad (3)$$

which the main Q-network aims to minimize by calculating gradients with respect to θ . Double Deep Q-Networks (DDQN) is an extension of DQN, which uses the same two networks but the target value is computed differently. In DQN the target network chooses the next best action and calculates the associated reward:

$$y_{\text{DQN}} = r + \gamma \max_{a'} Q(s', a'; \theta^-). \quad (4)$$

Computing the maximum over noisy estimates tends to introduce an overestimation bias. In DDQN the next best action $\hat{a}$ is therefore chosen by the main network,

$$\hat{a} = \arg \max_{a'} Q(s', a'; \theta), \quad (5)$$

but its value is evaluated using the target network:

$$y_{\text{DDQN}} = r + \gamma Q(s', \hat{a}; \theta^-). \quad (6)$$

Simply put, the main network decides which action looks best, while the target network provides a more stable estimate of how good that action is.

As the final ingredient, RL uses epsilon-greedy exploration to balance exploration (trying new actions) and exploitation (choosing the best-known action). The parameter $\varepsilon \in \mathbb{R}$ with $0 < \varepsilon \leq 1$ controls the probability of selecting a random action instead of the action with the highest predicted Q-value, i.e.,

$$\hat{a} = \begin{cases} a' \sim \text{Unif}(\mathcal{A}_s), & \text{with probability } \varepsilon \\ \hat{a}^*, & \text{with probability } 1 - \varepsilon, \end{cases} \quad (7)$$

where $\mathcal{A}_s$ is the set of possible actions in state s , which is a subset of all actions $\mathcal{A}_s \subset \mathcal{A}$. At the start of training, where $\varepsilon = \varepsilon_0 = 1$, the agent choosing random actions. Over time, ε decreases, and as such, the agent is relying more on its learned Q-values.

B. DQC setting

In this section we describe the reinforcement-learning cycle introduced by Promponas et al. [24], including its most important numerical building blocks, such as the action space $\mathcal{A}$, the state space $\mathcal{S}$, the Q-value approximation and the action masking, and lastly, how the reward is calculated.

a) The action space $\mathcal{A}$

We first distinguish between *operations* supported by the compilation framework and *actions* available to the agent. To execute a quantum circuit, the framework supports the following operations: the execution of a SWAP or CNOT gate on any local edge in E_n , and the generation of an EPR pair on any remote channel in E_c . If an EPR pair is available, the framework further supports the execution of a *tele-gate* or a *tele-qubit* operation on a remote connection in E_c ; see Fig. 3 and definitions in Section II. For simplicity, we neglect single-qubit gates, as these are purely local operations and therefore do not require routing nor remote communication. Among these operations, CNOT and tele-gate directly implement a circuit gate and therefore remove the corresponding vertex $v \in V_g$ from the DAG when executed. By contrast, SWAP, generate, and tele-qubit modify the placement of virtual qubits or prepare the resources required for remote execution. We therefore refer to CNOT and tele-gate as *delete operations*, and to SWAP, generate, and tele-qubit as *routing actions*. Importantly, as delete operations take priority whenever they are feasible, they are executed automatically by the environment and are therefore *not* part of the agent's action space.

Each operation takes a set number of timesteps to be executed, summarized in Table I. The listed values are in accordance with the assumptions of Promponas et al. [24] and can be modified; however, they should reflect the condition that remote primitives (see Definitions II.2 and II.1) take several times longer than a local two-qubit operation. It can thus happen that an action cannot yet be executed due to required qubits being occupied. Furthermore, some actions might not be possible due to certain requirements not being met. For example, a tele-qubit can only be scheduled on a link in E_c when an EPR pair already exists on this link. Invalid actions, i.e., actions not belonging to the admissible action set $\mathcal{A}_s$ in state s , need to be filtered out by a mask.

TABLE I: Number of timesteps each action takes to complete [24].

Actions	Execution time
Score (t_{local})	1
Swap ($3 \times t_{\text{local}}$)	3
Generate (t_{gen})	5
Tele-gate (t_{remote})	5
Tele-qubit (t_{remote})	5


In addition to the actions listed in Table I, the agent can wait for a timestep to go by when it is infeasible to perform any routing action. This action is termed STOP. In a given state s the agent introduced by Promponas et al. can therefore choose from the set of currently feasible actions $\mathcal{A}_s \subset \mathcal{A}$, where

$$\mathcal{A} = \left\{ \text{STOP, SWAP}_1, \dots, \text{SWAP}_{|E_n|}, \text{telequbit}_1, \dots, \text{telequbit}_{|E_c|}, \text{generate}_1, \dots, \text{generate}_{|E_c|} \right\} \quad (8)$$


with size $|\mathcal{A}| = 1 + 2|E_c| + |E_n|$.

b) The state space $\mathcal{S}$


An environment's state $s \in \mathcal{S}$ is a vector that stores the qubit mapping and the DAG as they transform under the agent's actions. In particular, whenever a gate $v \in V_g$ of the DAG gets executed, the vertex v is deleted and the DAG is updated, $V_g \leftarrow V_g \setminus \{v\}$ and $E_g \leftarrow E_g \setminus E_v$, where E_v denotes all edges incident to v . Fig. 4c) shows an example of the state vector, given a qubit mapping in Fig. 4a) and a DAG in Fig. 4b). The qubit-mapping is associated with the first $|V|$ indices of the state vector, where the i -th index indicates the physical qubit $i \in V$ and the value $s_i \in s$ refers either to the mapped virtual qubit or stores -1, if the qubit is not initialized (i.e., does not have a virtual qubit mapped to it). Entries at $(|V| + 1)$ through $(|V| + 3|V_g|)$ of the state vector store 3-tuples $v \mapsto (x, y, d)$, where (x, y) denotes the ordered pair of virtual qubits involved in the gate, and d denotes the layer ℓ_d of the DAG in which the gate appears.



(a) Qubit mapping on a 2x2 QPU layout with one connecting quantum channel $|E_q| = 1$.



(b) DAG of a circuit, with frontier $\text{CNOT}(q_3, q_0)$, $\text{CNOT}(q_2, q_4)$.

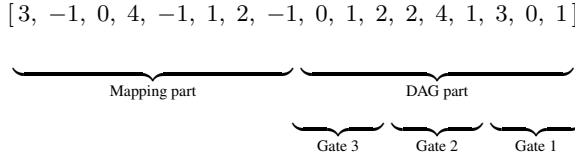

(c) Resulting state vector with the first $|V|$ entries describing the qubit mapping and the remaining entries encoding the DAG with Gates 1–3 using the 3-tuples $(0, 1, 2)$, $(2, 4, 1)$, $(3, 0, 1)$, respectively. Gate 1 and Gate 2 form the first layer $d = 1$, i.e., the frontier, while Gate 3 is in the second layer $d = 2$.

Fig. 4: Example of a state vector.

c) Reward structure

An action's reward should reflect the agent's progress toward the overall goal: reducing execution time of the quantum circuit under the given hardware model. The agent in Promponas et al. receives a reward R_{score} when an action leads to completing a gate, also referred to as "scoring". Successfully completing *all* gates provides an additional reward, R_{success} . If the agent fails to complete the circuit, i.e., it cannot finish before a preset number of time steps T , it receives a large penalty, R_{fail} . Because the agent's goal is to route circuits as quickly as possible, also the STOP action is penalized. Each STOP action carries a small negative reward, R_{STOP} , such that minimizing unnecessary STOPs leads to a higher final reward.

For qubit-movement actions, such as SWAP or tele-qubit operations the reward is based on the progress made toward routing the virtual qubits participating in frontier gates towards each other. In order to calculate the distance between locations of virtual qubits, the framework uses a distance metric [22]. Here, each state s is associated with a weighted graph G_s , where physical couplings have weight 1, quantum links have weight $w > 1$, and the two halves of a generated entangled pair are connected by an edge of weight 1. For every frontier gate $v \in \ell_1$, the shortest-path distance between the current locations of x and y is computed in G_s . Summing these distances over all frontier gates defines the state distance metric $d_G(s)$. The reward of a movement action that transforms s into s' is then

$$R_{\text{move}}(s, s') = \xi(d_G(s) - d_G(s')), \quad (9)$$

where $\xi > 0$ is a scaling constant. Thus, actions that reduce the total frontier distance receive positive reward.

d) The reinforcement-learning cycle

The training of an RL agent is split into N training cycles, so called *episodes*. Each episode begins with a randomly generated initial mapping and quantum circuit, which together define the initial state s^{init} . The state s^{init} is passed as input to the neural network, and the Q-values produced by the network are masked according to which actions are feasible in the current state $\mathcal{A}(s^{\text{init}}) \subset \mathcal{A}$. At the start of training, the agent prioritizes exploration, as $\varepsilon_0 = 1$, selecting among the available actions randomly. The value of epsilon decays with each episode according to $\varepsilon(k) = \frac{\varepsilon_0}{1 + \frac{k}{\varepsilon_d}}$, where $k \in \{0, 1, \dots, N\}$

is the episode number and $\varepsilon_d \in \mathbb{R}^+$ is a chosen epsilon decay denominator. After an action is chosen, any applicable delete gate $v \in \ell_{d-1}$ of the frontier layer of the DAG is executed and the latter is updated accordingly. When all gates of the frontier layer are executed, the agent proceeds to the next layer $\ell_{d=2}$.

At last, the agent receives the reward and associated experience, which includes the state before s , the action chosen a and the state after s' . This tuple (s, a, s') is saved to the memory buffer $\mathcal{D}$. If the predefined number of steps between learning iterations has elapsed it performs the learning iterations, i.e., updates the agent's parameters via gradient descent using the loss function according to Equation (3) and randomly sampling a batch of experiences of size β from the replay buffer $\mathcal{D}$. Finally, the agent verifies whether the episode end criteria have been met, which is either the DAG being empty or the current time being passed a predefined number of maximum timesteps T . If the criteria are not yet met, the state and mask are updated, and the agent repeats the described steps until the end of the episode.

IV. INTRODUCED AGENT

In this section, we describe the design choices for our agent, which is compatible with the framework introduced by Promponas et al., as they share the same state space $\mathcal{S}$.

A. Action space $\tilde{\mathcal{A}}$

In our approach, instead of associating actions with edges in E_n , we allow an action to be composed of several SWAP and

tele-qubit operations. More specifically, an action is associated with every physical qubit pair (i, j) , where $\{i, j\} \subset V$ of the coupling graph (defined in Eq. 1) and $i \neq j$. An action can route the virtual qubit mapped to the first qubit i in the pair to another physical qubit j using a chain of SWAP and tele-qubit operations along a precomputed shortest path between i and j using Dijkstra’s algorithm [8]. Note that in case of multiple shortest paths between two locations (i, j) , we select one at random. We refer to a routing operation as $\text{ROUT}_{(i,j)}$.

Furthermore, we allow the STOP action to account for more than one time step. In particular, whenever a STOP action is implemented, time is advanced until at least one action becomes feasible again, we denote this elapsed time as Δt_{skip} . The action space therefore becomes

$$\tilde{\mathcal{A}} = \{\text{STOP}\} \cup \{\text{ROUT}_{(u,v)} \mid u, v \in V, u \neq v\} \cup \{\text{gen}_e \mid e \in E_c\}. \quad (10)$$

with size $|\tilde{\mathcal{A}}| = 1 + |E_c| + |V|(|V| - 1)$, where $|E_c|$ is the number of quantum links which connect different QPUs and $|V|$ is the number of physical qubits. Since $\mathcal{A} \subset \tilde{\mathcal{A}}$, our agent faces a larger degree of freedom with the potential of choosing more impactful actions at every step. However, this enlargement of the action space is naturally calling for a more restrictive action masking strategy in order to preserve the learning ability of the agent, which we will introduce in the following section.

B. Action masking and Q-value approximation

In order to determine a restrictive action masking strategy, we define the admissible action set $\tilde{\mathcal{A}}(s) \subset \tilde{\mathcal{A}}$ in a state s such that routing actions are retained only if they are directly related to progress in the current frontier or to the preparation of remote communication. Recall that the frontier is given by the first layer ℓ_1 of the DAG. For a frontier gate $v \in \ell_1$, let $(x, y, 1)$ denote the corresponding tuple in the state representation, where x and y are the two virtual qubits involved in that gate. We refer to a physical qubit as a *frontier qubit* if it currently stores one of these virtual qubits. Furthermore, a value -1 means the qubit is non-initialized, and E_1 or E_2 refers to an *EPR qubit*. With this terminology, the action mask excludes any routing action that neither decreases the distance in G_s between the qubits of a frontier gate nor moves a non-initialized qubit towards a communication qubit associated with some link in E_c . Consequently, the admissible routing actions are restricted to the following three classes: i) actions $\text{ROUT}(i, j)$ that move a frontier qubit from i along a precomputed shortest path towards the physical qubit currently holding its frontier-gate partner; ii) actions $\text{ROUT}(i, j)$ that move a non-initialized physical qubit from i along a precomputed shortest path towards a physical qubit incident to a link in E_c , thereby preparing EPR-pair generation; iii) actions $\text{ROUT}(i, j)$ that move an EPR qubit and a frontier qubit along precomputed shortest paths towards one another.

In principle, the Q-network could output one value for every action in $\tilde{\mathcal{A}}$. However, this would require one Q-value for every directed routing action (i, j) , which scales quadratically

in the number of physical qubits. To reduce the number of trainable outputs, we adopt a structured approximation in which the network predicts a set of induced Q-values, $\mathcal{Q}$, of size $|\mathcal{Q}| = 1 + |E_c| + |V|$: one for STOP, one for each generate action, and one scalar Q_i for each physical qubit $i \in V$. Under this construction, the number of trainable outputs is quadratically reduced in the number of physical qubits, as $|\tilde{\mathcal{A}}| - |\mathcal{Q}| = |V|(|V| - 2)$. We define an induced action value for each directed routing action from qubit i to qubit j

$$Q_{ij} := (1 - \alpha)Q_i + \alpha Q_j, \quad 0 < \alpha < 0.5. \quad (11)$$

Since $1 - \alpha > \alpha$, this construction preserves directionality, such that $Q_{ij} \neq Q_{ji}$. Intuitively, a large Q_i increases the value of all routing actions originating from i , whereas the αQ_j term biases the choice among possible targets. This parameterization is less expressive than learning each Q_{ij} independently, because all pairwise routing values must satisfy the additive structure above. In particular, it cannot represent arbitrary source-target interactions. Nevertheless, it provides an efficient low-dimensional approximation that reduces the number of routing-related outputs from $O(|V|^2)$ to $O(|V|)$, while still allowing the network to distinguish directed actions. Moreover, for hardware graphs that are not simple paths, this construction yields a smaller parameterization than the one used in the baseline framework: the number of trainable Q-values scales as $1 + |E_c| + |V|$ rather than $1 + 2|E_c| + |V|$ in the baseline approach.

C. Reward structure

Our model alters the move reward R_{move} depending on the distance metric $d_G(s)$ of a state s given in Equation (9). As our restrictive action mask already filters out most actions which do not provide progress towards the goal, the agent does not receive a negative reward if the distance metric increases. Instead it simply receives zero reward. Thus the reward is defined as $\tilde{R}_{\text{move}} := \max(\xi(d_G(s) - d_G(s')), 0)$ with $\xi \in \mathbb{R}^+$ denoting the reward’s weighting factor. Further, while in Promponas et al. each STOP action carries a small negative reward, R_{STOP} , we reduce remaining occupation time by multiple time steps in one STOP action. The associated reward is therefore based on the number of time steps Δt_{skip} (Section IV-A) the chain of operations take $\tilde{R}_{\text{STOP}} = R_{\text{STOP}} \cdot \Delta t_{\text{skip}}$.

V. EVALUATION

In this section, we evaluate the performance of our agent and compare it with the DDQN-based agent of Promponas et al. [24]. Our goal is to assess performance under different circuit lengths and hardware connectivity constraints. As our primary performance metric, we use the modeled circuit execution time T , i.e., the total number of time steps elapsed when an episode is successful. An episode is considered successful, when the agent achieves the full execution of the circuit before a set time limit $T \leq T_{\text{max}}$. If the time limit is reached, but not all gates of the circuit could be executed the training episode still terminates but is considered failed. We choose this metric because it provides a single and consistent measure

across all actions. In contrast to surrogate metrics such as the number of remote gates or inter-module communications, the modeled execution time or elapsed time of execution also accounts for operations that do not directly implement circuit gates, including moving non-initialized qubits, generating EPR pairs, and routing qubits that store one half of an EPR pair. In addition to this primary metric, we report the wall-clock training time T_{wall} to capture the computational cost of learning over a set number of circuits.

We consider two 32-qubit hardware topologies in order to study the effect of markedly different connectivity structures on performance: two connected QPUs of IBM Q Guadalupe and a 4×4 grid, shown in Figures 5 and 6, respectively.

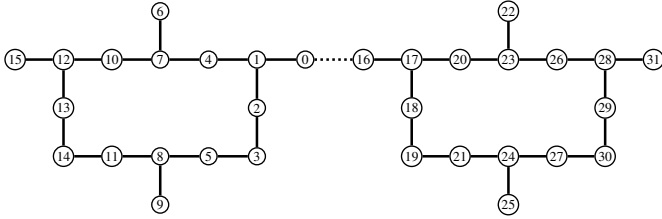


Fig. 5: DQC system with two IBM Q Guadalupe QPUs. Node labels denote the physical qubit number; dotted line is the quantum channel connecting both modules.

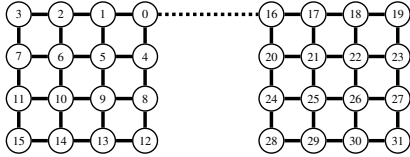


Fig. 6: Qubit connectivity of DQC architecture consisting of two 4×4 grid modules, the dotted line indicates the quantum channel.

A. Numerical setup

To study how performance scales with problem size, we generate three training sets, each consisting of 250 circuits acting on 18 virtual qubits. The three sets differ in the number of CNOT gates per circuit, namely 30, 40, and 50; which we denote $\mathcal{C}_{30}$, $\mathcal{C}_{40}$ and $\mathcal{C}_{50}$, respectively.

The hyperparameters of the learning procedure are shared across agents and are listed in Table II and other execution parameters used throughout the experiments are given in Table III.

The two agents differ architecturally only in the treatment of qubit-pair actions, as described in Section IV. Both neural networks employ two hidden layers with ReLU activations. Promponas et al. [24] use 150 and 140 neurons in the first and second hidden layers, respectively. In our experiments, we use the same neural network size for the agent trained on 50-gate circuits. For the 40-gate circuits a smaller second layer of 120 neurons, and for the 30-gate circuits 90 and 80 neurons for the first and second hidden layer have already proven sufficient.

TABLE II: Hyperparameters used for training the DDQN agent.

Hyperparameter	Value
Learning rate	0.00001
Batch size (β)	2560
Memory buffer size ($ \mathcal{D} $)	100000
Epsilon decay denominator (ε_d)	80
Discount rate (γ)	0.99
Target network update parameter (τ)	0.001
Learning frequency	Every 5 actions
Number of learning iterations	10
Optimizer	Adam [16]

TABLE III: Execution parameter values.

Parameter	Value
Time limit (T_{max})	1500
Entanglement probability (p_{gen})	0.95
Distance weight (w)	30
Distance multiplier (ξ)	18
Reward stop (R_{stop})	-20
Reward score (R_{score})	500
Reward empty dag (R_{success})	3000
Reward deadline (R_{fail})	-3000

All wall-clock measurements were obtained on a workstation equipped with an AMD Ryzen 7 5700G CPU and an NVIDIA RTX 3070 GPU.

B. Training performance on 4×4 grid

First, we assess training performance on a set of randomly generated circuits $\mathcal{C}_{30}$, where each $C \in \mathcal{C}_{30}$ holds 30 CNOT gates and $|\mathcal{C}_{30}| = 250$. Both the baseline and our agent iterate through this set and try to compile one circuit instance per episode. The circuits are compiled under a high-connectivity topology, using two 4×4 grid QPUs, depicted in Fig. 6.

Fig. 7 shows the modeled circuit execution time during one training run on the grid topology. Each data point represents the moving average over ten episodes. Overall, we observe that our model requires more episodes before achieving a meaningful reduction in execution time. Once trained, however, it attains slightly lower execution times than the baseline agent on this architecture.

The baseline agent exhibits a more gradual improvement throughout training, due to its routing actions being defined on individual edges, which makes it more likely to identify locally improving actions early on in a topology that offers many alternative paths. By contrast, the policy improvement of our model is much more abrupt, in particular between episodes 100 and 110. Our agent selects larger routing chains at once, but does so along a single predefined shortest path between two physical qubits. On a grid topology, this can be disadvantageous at the beginning of training, since multiple shortest paths typically exist between two locations. If routing chains are chosen along arbitrarily fixed shortest paths, different chains are more likely to intersect, which introduces waiting times. Once the agent learns to favor routing actions whose shortest paths interfere less with one another, the resulting policy achieves competitive, and ultimately even slightly better execution times.

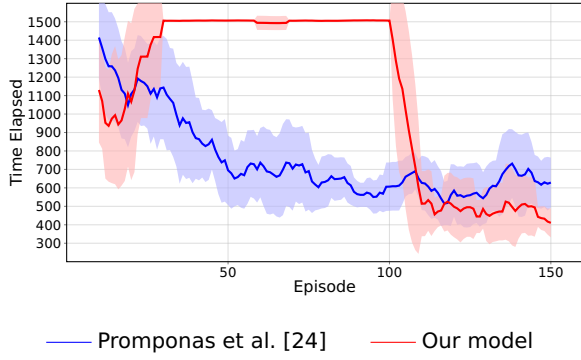


Fig. 7: Comparison of moving average of elapsed execution time T during training on 30-gate circuits in $\mathcal{C}_{30}$ compiled on two 4x4 grid QPUs. Error envelopes indicate the standard deviation of the moving average.

C. Training performance on Guadalupe

We first compare training performance on circuits with increasing gate count, $\mathcal{C}_{30}$, $\mathcal{C}_{40}$ and $\mathcal{C}_{50}$. Fig. 8 and 9 show the reward and execution time results reported in [24] and our approach, respectively. Each datapoint corresponds to the moving average of ten episodes. As expected, the reward shows a large absolute improvement over training in the baseline approach; from $-20\,000$ to $-2\,500$ on average over the last 100 episodes. However, we observe that an increasing reward does not necessarily imply learning a policy that can do better than just randomly executing operations. We see in fact that for circuit sets $\mathcal{C}_{40}$ and $\mathcal{C}_{50}$ rewards increase but the execution times remain close to what can be achieved with randomly selecting and executing actions, i.e., no better-than-random policy is learned. Only for the set of circuits with smallest gate count $\mathcal{C}_{30}$, the baseline agent achieves a meaningful reduction in execution time to an average of ~ 1210 over the last 100 episodes. In this setting, our model achieves lower execution time, depicted in Fig. 9. Over the last 100 episodes, the average solve time yields ~ 746 time steps, corresponding to a relative improvement of $\sim 38\%$. Furthermore and in contrast to the baseline agent, both agents trained on $\mathcal{C}_{40}$ and $\mathcal{C}_{50}$ exhibit a significant decrease in execution time toward the end of training, indicating improved scalability relative to the baseline. We see significantly less relative increase in our reward. Note that, however, we adapted our reward structure (see Section IV-C) and the reward results of baseline and our agent are therefore not directly comparable.

We plot the standard deviation of the moving average in Fig. 10 to illustrate that both models exhibit variability throughout training. In general, large variation indicates that learning has not fully converged and remains sensitive to the specific circuit instances encountered. High reward variance further suggests that the learning signal is noisy or unstable, so that the agent does not achieve a consistent return across episodes. In this respect, our agent achieves a reduction in its standard deviation over the last 100 episodes, it attains an average standard deviation of approximately 2000, whereas the baseline agent remains more or less consistent above 4000

of its cumulative reward throughout training.

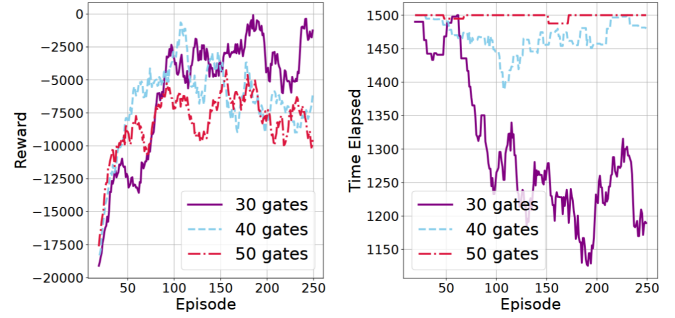


Fig. 8: Training results of baseline agent [24] over 250 episodes of cumulative reward and execution time until successful quantum circuit compilation or deadline expiry for random circuits sets $\mathcal{C}_{30}$, $\mathcal{C}_{40}$ and $\mathcal{C}_{50}$. Each data point corresponds to the moving average of ten episodes.

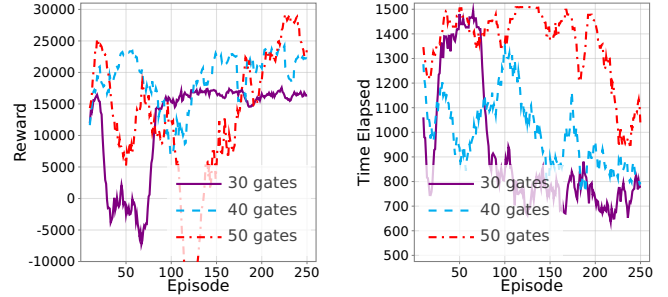


Fig. 9: Training results using our approach over 250 episodes of cumulative reward and execution time until successful quantum circuit compilation or deadline expiry for random circuits sets $\mathcal{C}_{30}$, $\mathcal{C}_{40}$ and $\mathcal{C}_{50}$. Each data point corresponds to the moving average of ten episodes.

The wall-clock runtime of training T_{wall} differs substantially. On 30-gate circuits, the agent of [24] requires approximately 66 hours, whereas our model completes the set number of episodes in about 23.5 hours, a relative reduction of 64%. We attribute this reduction primarily to the smaller neural network size as well as to the reduced number of Q-values.

D. Inference performance and dependence on lookahead

In this section, we study inference performance, i.e., how well an agent does on a separate test set of 250 random circuits after training is completed. More specifically, we evaluate and compare the agents trained on the $\mathcal{C}_{30}$ on a test set $\mathcal{C}_{30}^{\text{test}}$ where each random circuit again contains 30 CNOT gates. We note that during training, after 250 episodes $\varepsilon(250) \approx 0.17$, so that the policy still includes exploration.

Fig. 11 shows the corresponding result distributions. As expected from the training results, the baseline agent remains at an overall larger execution time than our approach. Concretely, the average execution time of the baseline agent is approximately 1227, while our agent achieves an average

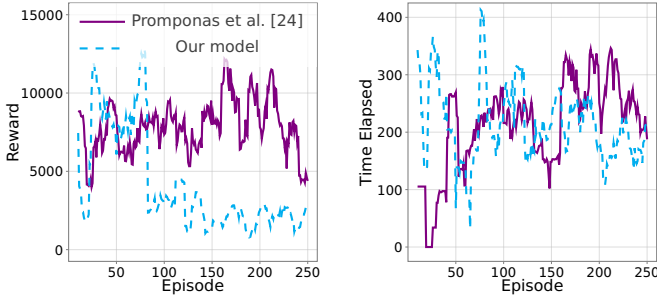


Fig. 10: Standard deviation of training results of baseline [24] and our model. Each datapoint reports standard deviation of the moving average over ten episodes for cumulative reward and execution time for circuit set C_{30} .

execution time of approximately 799. These results are 2% and 7% higher relative to the training averages of the last 100 episodes, for the baseline and our agent, respectively. This correction is not surprising, as the observed shift remains small relative to the variability seen during training, and inference is after all evaluated on previously unseen test circuits. Still, the relative improvement in average execution time between introduced agent and baseline agent remains significant at 35%.

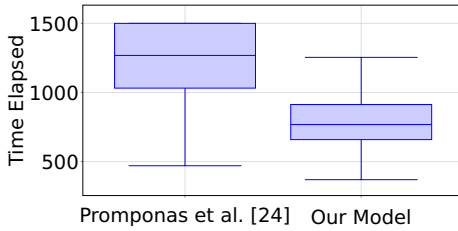


Fig. 11: Boxplots representing execution time comparison, where both baseline and our agent were trained on C_{30} executing the test circuits in C_{30}^{test} .

Next, we assess whether it is necessary for an agent’s inference performance to observe the *full* circuit during training. A smaller lookahead would be desirable because it would reduce the size of the state representation and thus the computational burden of learning, potentially improving scalability to larger circuits. We therefore want to study to what extent restricting the visible part of the circuit affects inference performance. For this we evaluate our agent trained on C_{30} , C_{40} and C_{50} on a test set C_{50}^{test} with randomly generated circuits comprised of 50 CNOT gates, where $|C_{50}^{\text{test}}| = 250$. Fig. 12 shows the associated distributions. We observe improvement from an agent trained on C_{30} , where execution time average lies at approximately 1197 to an agent trained on C_{40} , where the average execution time lies approximately at 1102, corresponding to about 7% relative reduction; we do observe further improvement from the latter agent to the one trained on even larger circuits C_{50} where execution time average lies at approximately 995, another 9.7% relative reduction. This suggests that in our setup, all involved gates impact routing

decisions and training on larger circuits improves the agent’s ability to make these decisions. We can therefore not assume that gates after a certain look-ahead window have less impact than earlier gates at the considered circuit size.

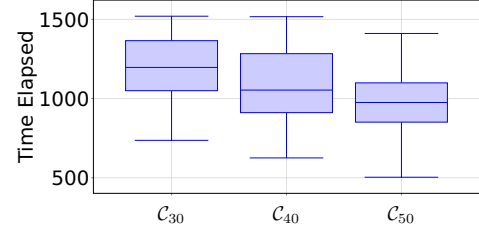


Fig. 12: Boxplots representing execution time results for our model trained on different circuits sizes (C_{30} , C_{40} and C_{50}) executing all circuits in C_{50}^{test} .

VI. CONCLUSION

In this work, we investigated executing quantum circuits on distributed quantum computing (DQC) architectures using reinforcement learning. Aligned with the environment of an existing method by Promponas et al. [24], we introduced a novel action space, action masking strategies, as well as Q-value approximation and adapted the reward function. We compared our agent with the existing approach as baseline. The results show that both RL agents can learn nontrivial qubit-routing strategies for distributed quantum computing, and that the introduced model improves significantly over the baseline on the more constrained Guadalupe architecture while remaining competitive on a grid topology. Importantly, this improvement is achieved within the same state space. The main result is obtained for 30-gate circuits: during training, the average execution time decreases from an average over the last 100 episodes of approximately 1,210 timesteps for the baseline to approximately 746 timesteps for the proposed model (a reduction of about 38%), see Figures 8 and 9. This advantage also carries over to unseen test circuits, where inference execution time improves from about 1,227 to about 799 timesteps, corresponding to a relative improvement of approximately 35% and depicted in Fig. 11. On the more highly connected 4×4 grid topology, the new model learns more slowly at the beginning of training, but it still reaches competitive final performance at the end of training. In addition, we tested the impact of look ahead windows, where we could see improvement in growing training size, with data presented in Fig. 7. Another important finding is that our proposed model is much less costly to train. In the same setting, when training on circuits of 30 gates relative wall-clock training time is reduced by 64%, showing that the method is not only better performing but also more computationally efficient in the considered setting. However, scalability remains limited by the polynomial growth of the state space with the number of gates. Under the simplified modeling assumptions considered in this work, the agent assessments are still limited to 50 gates per circuit and 18 qubits under the current cost of training

wall clock time. In addition, the masking strategy introduces a potential trade-off between faster learning and the ability to discover more globally optimized routing strategies. Future work will therefore focus on more compact and transferable state representations in order to support broader generalization and scalability.

VII. DATA AND CODE AVAILABILITY

The complete dataset analyzed in this study is archived in [32]. The simulation code is part of the same data archive, but is also available at [31].

VIII. ACKNOWLEDGMENTS

This work is supported by QuTech NWO funding 2020-2024 Part I “Fundamental Research”, Project Number 601.QT.001-1, financed by the Dutch Research Council (NWO). We further acknowledge support from NWO QSC grant BGR2 17.269. Generative AI disclosure: OpenAI’s ChatGPT Extended Thinking Model was used to generate plot skeletons into which the authors inserted numerically generated result data, and to generate TikZ code for selected Figures 2, 3, 4, 5, and 6.

REFERENCES

- [1] ANDRES-MARTINEZ, P., AND HEUNEN, C. Automated distribution of quantum circuits via hypergraph partitioning. *Physical Review A* 100, 3 (2019), 032308.
- [2] BAKER, J. M., DUCKERING, C., HOOVER, A., AND CHONG, F. T. Time-Sliced Quantum Circuit Partitioning for Modular Architectures. In *Proceedings of the 17th ACM International Conference on Computing Frontiers* (May 2020), pp. 98–107. arXiv:2005.12259 [quant-ph].
- [3] BANDIC, M., PRIELINGER, L., NÜSSLEIN, J., OVIDE, A., RODRIGO, S., ABADAL, S., VAN SOMEREN, H., VARDOLAN, G., ALARCON, E., ALMUDEVER, C. G., ET AL. Mapping quantum circuits to modular architectures with qubo. In *2023 IEEE International Conference on Quantum Computing and Engineering (QCE)* (2023), vol. 1, IEEE, pp. 790–801.
- [4] CAO, Y., ROMERO, J., AND ASPURU-GUZI, A. Potential of quantum computing for drug discovery. *IBM Journal of Research and Development* 62, 6 (2018), 6–1.
- [5] CIRAC, J. I., EKERT, A., HUELGA, S. F., AND MACCHIAVELLO, C. Distributed quantum computation over noisy channels. *Physical Review A* 59, 6 (1999), 4249.
- [6] CUOMO, D., CALEFFI, M., KRSULICH, K., TRAMONTO, F., AGLIARDI, G., PRATI, E., AND CACCIAPUOTI, A. S. Optimized compiler for distributed quantum computing. *ACM Transactions on Quantum Computing* 4, 2 (Feb. 2023).
- [7] DE LEON, N. P., ITOH, K. M., KIM, D., MEHTA, K. K., NORTHUP, T. E., PAIK, H., PALMER, B., SAMARTH, N., SANGTAWESIN, S., AND STEUERMAN, D. W. Materials challenges and opportunities for quantum computing hardware. *Science* 372, 6539 (2021), eabb2823.
- [8] DLJKSTRA, E. A note on two problems in connexion with graphs. *Numerische Mathematik* 50 (1959), 269–271.
- [9] EINSTEIN, A., PODOLSKY, B., AND ROSEN, N. Can quantum-mechanical description of physical reality be considered complete? *Physical review* 47, 10 (1935), 777.
- [10] EISERT, J., AND PRESKILL, J. Mind the gaps: The fraught road to quantum advantage. *arXiv preprint arXiv:2510.19928* (2025).
- [11] FERRARI, D., CARRETTA, S., AND AMORETTI, M. A modular quantum compilation framework for distributed quantum computing. *IEEE Transactions on Quantum Engineering* 4 (2023), 1–13.
- [12] GEORGESCU, I. M., ASHHAB, S., AND NORI, F. Quantum simulation. *Rev. Mod. Phys.* 86, 1 (Mar. 2014), 153–185. Publisher: American Physical Society.
- [13] GOODFELLOW, I., BENGIO, Y., COURVILLE, A., AND BENGIO, Y. *Deep learning*, vol. 1. MIT press Cambridge, 2016.
- [14] HUMPHREYS, P. C., KALB, N., MORITS, J. P. J., SCHOUTEN, R. N., VERMEULEN, R. F. L., TWITCHEN, D. J., MARKHAM, M., AND HANSON, R. Deterministic delivery of remote entanglement on a quantum network. *Nature* 558, 7709 (June 2018), 268–273.
- [15] KALB, N., REISERER, A. A., HUMPHREYS, P. C., BAKERMANS, J. J., KAMERLING, S. J., NICKERSON, N. H., BENJAMIN, S. C., TWITCHEN, D. J., MARKHAM, M., AND HANSON, R. Entanglement distillation between solid-state quantum network nodes. *Science* 356, 6341 (2017), 928–932.
- [16] KINGMA, D. P., AND BA, J. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980* (2014).
- [17] LI, G., DING, Y., AND XIE, Y. Tackling the qubit mapping problem for nisq-era quantum devices. In *Proceedings of the twenty-fourth international conference on architectural support for programming languages and operating systems* (2019), pp. 1001–1014.
- [18] MAIN, D., DRMOTA, P., NADLINGER, D. P., AINLEY, E. M., AGRAWAL, A., NICHOL, B. C., SRINIVAS, R., ARANEDA, G., AND LUCAS, D. M. Distributed quantum computing across an optical network link. *Nature* 638, 8050 (Feb. 2025), 383–388.
- [19] MONROE, C., RAUSSENDORF, R., RUTHVEN, A., BROWN, K. R., MAUNZ, P., DUAN, L., AND KIM, J. Large-scale modular quantum-computer architecture with atomic memory and photonic interconnects. *Physical Review A* 89, 2 (Feb. 2014), 022317. ARXIV_ID: 1208.0391 MAG_ID: 2043500043 S2ID: 0c73f108a19ce71785235766fd76b8b8ed571972.
- [20] NICKERSON, N. H., LI, Y., AND BENJAMIN, S. C. Topological quantum computing with a very noisy network and local error rates approaching one percent. *Nature Communications* 4, 1 (Apr. 2013), 1756. arXiv:1211.2217 [quant-ph].
- [21] NIELSEN, M. A., AND CHUANG, I. L. *Quantum computation and quantum information*, 10th anniversary ed ed. Cambridge University Press, Cambridge ; New York, 2010.
- [22] POZZI, M. G., HERBERT, S. J., SENGUPTA, A., AND MULLINS, R. D. Using Reinforcement Learning to Perform Qubit Routing in Quantum Compilers. *ACM Transactions on Quantum Computing* 3, 2 (May 2022). Place: New York, NY, USA Publisher: Association for Computing Machinery.
- [23] PRESKILL, J. Quantum Computing in the NISQ era and beyond. *Quantum* 2 (Aug. 2018), 79. Publisher: Verein zur Förderung des Open Access Publizierens in den Quantenwissenschaften.
- [24] PROMPONAS, P., MUDVARI, A., DELLA CHIESA, L., POLAKOS, P., SAMUEL, L., AND TASSIULAS, L. Compiler for Distributed Quantum Computing: a Reinforcement Learning Approach, Apr. 2024. arXiv:2404.17077 [quant-ph].
- [25] SHOR, P. Algorithms for quantum computation: discrete logarithms and factoring. In *Proceedings 35th Annual Symposium on Foundations of Computer Science* (1994), pp. 124–134.
- [26] SUNDARAM, R., GUPTA, H., AND RAMAKRISHNAN, C. Dqc-qr: Distributing and routing quantum circuits with minimum execution time. *ACM Transactions on Quantum Computing* 6, 4 (Sept. 2025).
- [27] SUTTON, R. S., AND BARTO, A. G. Reinforcement Learning: An Introduction.
- [28] TALSMA, L., IÑESTA, Á. G., AND WEHNER, S. Continuously distributing entanglement in quantum networks with regular topologies. *Physical Review A* 110, 2 (2024), 022429.
- [29] TANG, W., DUAN, Y., KHARKOV, Y., FAKOOR, R., KESSLER, E., AND SHI, Y. Alpharouter: Quantum circuit routing with reinforcement learning and tree search. In *2024 IEEE International Conference on Quantum Computing and Engineering (QCE)* (2024), vol. 01, pp. 930–940.
- [30] TERHAL, B. M. Quantum error correction for quantum memories. *Reviews of Modern Physics* 87, 2 (2015), 307–346.
- [31] VAN VEEN, J. Compilerdqc. <https://github.com/joost-vanveen/CompilerDQC>, 2026. GitHub repository, branch: main, accessed 2026-03-16.
- [32] VAN VEEN, J., PRIELINGER, L., AND FELD, S. Data underlying the publication: Reinforcement learning in compilers for dqc. *4TU.ResearchData* (2026). DOI: <https://doi.org/10.4121/E12F2420-BA6E-45FC-93B6-EE6AB6E52E7A>.