

# Discretization-Aware Fine-Tuning for Quantum Machine Learning with Chemical Foundation Models

Shunji Matsuura<sup>\*†‡§</sup>, Sonika Johri<sup>¶</sup>

<sup>\*</sup>RIKEN Center for Interdisciplinary Theoretical and Mathematical Sciences (iTHEMS),

RIKEN, Wako, Saitama 351-0198, Japan

<sup>†</sup>Department of Electrical and Computer Engineering, University of British Columbia, Vancouver, BC V6T 1Z4, Canada

<sup>‡</sup>Center for Mathematical Science and Advanced Technology, Japan Agency for Marine-Earth Science and Technology, Yokohama 236-0001, Japan

<sup>§</sup>Department of Physics, University of Guelph, Guelph, ON N1G 1Y2, Canada

<sup>¶</sup>Cascade Quantum, Cupertino, CA, USA

shunji.matsuura@riken.jp, sonika@cascadequantum.com

**Abstract**—A key challenge in practical quantum machine learning (QML), particularly for discriminative tasks such as classification, is the limited capacity of near-term quantum devices to encode high-dimensional classical data into small quantum registers. In optimized basis-encoded (bit-bit) settings, this constraint leads to cross-class collisions, where samples with different labels are mapped to the same discrete bit-string and thus become indistinguishable to any downstream model. In this work, we investigate how data representation affects QML performance under such severe information bottlenecks. We introduce discretization-aware fine-tuning (DAFT), a method that adapts a pre-trained chemical foundation model to produce representations that remain informative after quantization. DAFT reduces collision probability through a differentiable soft collision loss. We evaluate both quantum and classical models under a controlled setting in which they receive identical discretized bit-string inputs, isolating the effect of representation from model architecture. On the blood-brain barrier penetration (BBBP) molecular property prediction benchmark using ChemBERTa-77M, DAFT reduces collision counts by several orders of magnitude and improves quantum classification accuracy by more than 12 percentage points compared to a frozen backbone. Importantly, without DAFT, classical models outperform QML under the same input constraints. With DAFT, however, this comparison reverses at higher qubit counts. At 10 qubits, the quantum model surpasses a matched classical baseline trained on identical bit-strings (0.883 vs. 0.855,  $p = 0.026$ ). These results show that, in information-constrained regimes, achieving a quantum advantage critically depends on aligning continuous representations with discrete quantum encodings.

**Index Terms**—Quantum machine learning, Hybrid quantum algorithms, Chemistry, Quantum AI

## I. INTRODUCTION

Near-term quantum machine learning (QML) based on building models with parameterized quantum circuits holds promise for learning tasks in high-dimensional spaces. In particular, to leverage hardware anticipated in the near future for practical applications, novel hybrid quantum-classical learning frameworks where classical models are augmented with quantum layers are being actively studied [1], [2], [3].

In practice, the potential of QML is constrained by a fundamental asymmetry. Parameterized quantum circuits operate in Hilbert spaces of dimension  $2^{n_q}$ , which grows exponentially

with the number of qubits  $n_q$ . However, encoding classical data into quantum states remains costly and can restrict the quantum advantage that can be achieved. More precisely, the runtime of the quantum model will scale at least as the time to load the data, while the form of the encoding restricts the expressivity of the quantum model that can be built [4].

Standard encoding strategies expose this tension. Amplitude encoding is efficient in the number of qubits required but generally requires  $O(2^{n_q})$  gates for state preparation [5], making it impractical on near-term devices. Angle encoding, while hardware-friendly, maps features to local rotations, producing highly structured product states that underutilize the combinatorial capacity of the computational basis. As a result, it cannot efficiently capture high-order feature interactions. More broadly, reliably encoding even moderate-dimensional continuous data remains challenging on current hardware [6].

Bit-bit encoding offers a practical alternative [7]. Instead of embedding continuous features directly, the input is compressed into a short binary string and loaded as a computational basis state:

$$|\psi_i\rangle = |b_{i,1}, b_{i,2}, \dots, b_{i,n_{\text{data}}}\rangle, \quad b_{i,k} \in \{0, 1\}. \quad (1)$$

This approach reduces state preparation to  $O(n_q)$  single-qubit gates, keeping circuits shallow and more robust to noise. Further, it allows for universal approximation with just one uploading of the data, unlike angle or amplitude encoding [8], [4], [9]. Combined with techniques such as exact coordinate-update training and progressive subnet initialization [7], it provides a hardware-realistic and scalable framework for quantum classification.

### A. The Central Challenge: What Survives Compression?

While bit-bit encoding simplifies state preparation, it introduces a new challenge: severe information compression. For example, a 4-qubit classifier operates on only 3 bits of data, yielding just 8 possible input patterns. This raises a central question: whether the compressed representation preserves the label-relevant structure needed for accurate classification.

A fundamental limitation arises when different samples are mapped to the same bit-string. If two molecules with different labels share the same representation, then neither a quantum nor a classical downstream model can correctly classify both using that encoding alone. We refer to such cases as *collisions*. A collision is a limitation of the representation, not of the model.

Here, we explore this limitation when fine-tuning a large classical model with frozen pre-trained embeddings on a particular dataset. Specifically, we find that ChemBERTa-77M [10], [11], a classical neural network trained on  $10^7$  molecules via masked language modeling, on the blood-brain barrier penetration (BBBP) dataset suffers from severe collision limitations. ChemBERTa-77M produces 384-dimensional embeddings that capture general chemical structure. However, when these embeddings are compressed to 3 bits for use in a 4-qubit circuit, we observe 11,544 collision-pairs on the blood-brain barrier penetration (BBBP) dataset, a standard molecular property prediction benchmark used to classify whether a compound can cross the blood-brain barrier. The pre-trained model is not optimized to preserve structure under such coarse discretization, leading to a dramatic loss of task-relevant information.

### B. Our Approach: Collision-Aware Representation Shaping

Standard fine-tuning with cross-entropy loss improves continuous-space separability but does not directly control whether opposite-class samples collapse to the same discrete bin. Fisher discriminant-style objectives encourage inter-class distance in continuous space, but again without targeting the actual quantization boundary.

We argue that neither is sufficient for bit-bit QML. The correct objective is to penalize collisions as they appear after discretization, not as a proxy measured in continuous space.

We introduce *discretization-aware fine-tuning* (DAFT), a two-stage backbone adaptation procedure for chemical foundation models. Stage 1 is standard cross-entropy warm-up. Stage 2 adds a differentiable soft collision penalty that estimates, for every opposite-class pair in the mini-batch, the probability that both samples fall into the same quantization bin. This penalty is computed in the continuous embedding space using soft bin assignments, so that gradients flow back through the projection head and into the transformer backbone.

### C. Contributions

This paper makes the following contributions.

- 1) We introduce the soft collision loss (Sec. II-D2), a differentiable objective that directly minimizes expected cross-class collision probability after quantization, and we show that it outperforms cross-entropy and Fisher fine-tuning in terms of collision reduction.
- 2) We perform a four-condition ablation (FROZEN, CE-ONLY, FISHER, SOFT-COLL) across five independent seeds to isolate the effect of each fine-tuning objective on both the discrete representation quality (collision count,

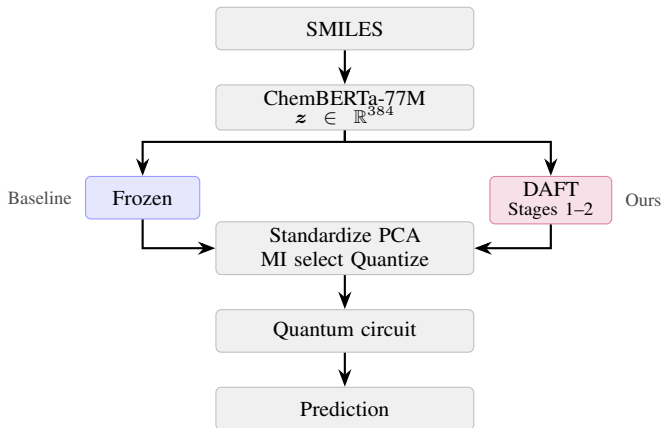


Fig. 1. Pipeline overview. SMILES strings are mapped to embeddings by ChemBERTa-77M. The baseline (blue) uses frozen embeddings, while the proposed method (purple) applies discretization-aware fine-tuning (DAFT). Both paths share the same preprocessing pipeline (standardization, PCA, mutual information selection, and quantization) to produce bit-string inputs for the quantum circuit. All classical baselines are evaluated on identical inputs for fair comparison.

Fisher PC1) and the downstream quantum classifier accuracy.

- 3) We introduce an information-controlled evaluation protocol (Sec. II-E) in which a logistic regression trained on the identical quantized bit-string at each qubit level serves as the matched classical baseline. This protocol separates representation effects from quantum processing effects.
- 4) We provide two complementary statistical results at 10 qubits (Sec. IV). Without DAFT, the matched classical baseline outperforms the quantum circuit by 6.0 pp ( $p < 0.001$ ), establishing fine-tuning as a necessary condition. With DAFT, both models improve, but the quantum circuit improves by 12.2 pp while the classical baseline improves by only 3.5 pp, reversing the comparison and yielding a 2.8 pp quantum advantage ( $p = 0.026$ ).

The rest of the paper is organized as follows. Section II describes the full framework. Section III details the experimental protocol. Section IV presents and interprets all results. Section V discusses implications and limitations.

## II. METHOD

Figure 1 provides an overview of the complete pipeline. We describe the components in turn.

### A. Foundation-Model Representations

A molecule is represented in our pipeline by a SMILES string, which is a compact text encoding of its bond topology and atomic composition. To convert this discrete string into a form suitable for machine learning, we use a pre-trained chemical foundation model: a large transformer network that has been trained on millions of molecules and has learned a rich internal language of chemical structure. Concretely, the model ingests a SMILES string and produces a fixed-length continuous vector  $z \in \mathbb{R}^{d_{\text{emb}}}$ , extracted from the [CLS] (classification)

token of the final transformer layer. This vector is often called an *embedding*: a compressed numerical fingerprint that encodes features such as functional groups, ring systems, and electronic character learned during pre-training. Note that this happens without any supervision from the target property label.

The appeal of using such a foundation model, rather than hand-crafted descriptors such as Morgan fingerprints, is that the embedding space is already organized to reflect chemical similarity: molecules with structurally related SMILES tend to map to nearby points in  $\mathbb{R}^{d_{\text{emb}}}$ . This is exactly the kind of structure that a downstream classifier, whether quantum or classical, can exploit. However, as we discuss next, this high-dimensional continuous embedding cannot be loaded into a quantum register directly; the compression step required to do so introduces new challenges that form the central problem of this paper. Concrete architectural details of the foundation model used in our experiments are given in Sec. III.

### B. Bit-Bit Encoding

*a) Overview:* Bit-bit encoding [7] first *discretizes* the molecular descriptor into a short binary string, then loads that string as a computational basis state (1). State preparation from a known classical bit-string requires only single-qubit  $X$  gates (one per qubit that should be set to  $|1\rangle$ ), making the encoding independent of the embedding dimensionality and compatible with shallow, noise-tolerant circuits. The expressivity of the quantum model is then controlled by the parameterized entangling circuit that processes the loaded state, not through the loading step itself.

The embedding is compressed into  $n_{\text{data}} = n_q - 1$  bits (one qubit is reserved as the output register), using the following three-stage pipeline.

*b) Stage 1: Standardization and PCA.:* The raw embedding  $z \in \mathbb{R}^{d_{\text{emb}}}$  is first standardized to zero mean and unit variance per dimension, and then projected onto its top  $d_{\text{PCA}}$  principal components. Principal component analysis (PCA) finds the orthogonal directions of maximum variance: by retaining the top  $d_{\text{PCA}}$  components, we keep the most informative directions while discarding dimensions that are mostly noise and would otherwise introduce redundant bits. Crucially, the PCA projection is fit on the training set and then applied identically to the test set and all classical baselines, so no test-set information leaks into the representation. Following the PCA, a min-max normalization is applied along each PCA direction to map values into  $[0, 1]$  prior to quantization.

*c) Stage 2: Mutual-information feature selection and bit allocation.:* After PCA, we have  $d_{\text{PCA}}$  components. Not all of them are equally predictive of the target label  $y$ , and we have a tight bit budget:  $n_{\text{data}}$  bits in total. We therefore measure, for each component  $j$ , the *mutual information*

$$I_j = I(\hat{x}_j; y), \quad (2)$$

where  $\hat{x}_j$  is the  $j$ -th PCA coordinate and  $y \in \{0, 1\}$  is the class label. Mutual information quantifies how much knowing  $\hat{x}_j$  reduces uncertainty about  $y$ ; components with higher  $I_j$

are more predictive. Bits are then allocated proportionally to predictive value:

$$n_j = \left\lfloor n_{\text{data}} \frac{I_j}{\sum_k I_k} \right\rfloor, \quad (3)$$

where  $\lfloor \cdot \rfloor$  denotes rounding subject to  $\sum_j n_j = n_{\text{data}}$ . Components assigned  $n_j = 0$  bits are discarded. This procedure ensures that the available bit budget is spent on the dimensions that carry the most label-relevant information, rather than spreading it uniformly across all components.

*d) Stage 3: Quantization.:* Each retained component  $j$  is min-max normalized to  $[0, 1]$  and then uniformly divided into  $2^{n_j}$  equal bins. The bin index for sample  $i$  in component  $j$  is

$$b_{ij} = \min(\lfloor 2^{n_j} \tilde{x}_{ij} \rfloor, 2^{n_j} - 1), \quad b_{ij} \in \{0, \dots, 2^{n_j} - 1\}. \quad (4)$$

The binary representations of all retained bin indices are concatenated to form the full data bit-string  $\mathbf{b}_i \in \{0, 1\}^{n_{\text{data}}}$ , which is then loaded into the quantum register as  $|\mathbf{b}_i\rangle$ .

*e) Collisions and their consequences.:* Discretization introduces a fundamental risk: two molecules with different labels may map to the same bit-string. Formally, samples  $i \neq j$  are said to *collide* if  $\mathbf{b}_i = \mathbf{b}_j$  and  $y_i \neq y_j$ . The collision set is

$$\mathcal{C} = \{(i, j) : \mathbf{b}_i = \mathbf{b}_j, y_i \neq y_j, i < j\}. \quad (5)$$

Every pair in  $\mathcal{C}$  represents a fundamental ambiguity: the quantum circuit receives the identical input state  $|\mathbf{b}\rangle$  for both samples yet must predict opposite labels. This is not a failure of the model or the optimizer: no circuit, regardless of its depth or the number of trainable parameters, can correctly classify both members of a colliding pair using that encoding alone. The best achievable accuracy on colliding samples is bounded by the majority-class fraction among all samples sharing the same bit-string. Reducing  $|\mathcal{C}|$  is therefore a necessary condition for high classification accuracy, and the goal of the fine-tuning procedure described in Sec. II-D is precisely to reshape the embedding space so that this condition is satisfied.

### C. Parameterized Quantum Classifier

Once the bit-string  $\mathbf{b}_i$  has been prepared in the data register, a parameterized quantum circuit processes it to produce a classification output. The circuit has  $n_q$  qubits in total, divided into  $n_{\text{data}} = n_q - 1$  data qubits and one output qubit  $q_*$ . The data qubits are initialized in the computational basis state  $|\mathbf{b}_i\rangle$ ; the output qubit starts in  $|0\rangle$ .

*a) Circuit architecture.:* The circuit applies  $n_{\text{data}}$  identical entangling blocks in sequence, one for each data qubit  $q_k$ . Each block operates on the pair  $(q_*, q_k)$  and consists of three gates: a single-qubit Euler rotation on the output qubit,  $E(\alpha) = R_X(\alpha_1) R_Z(\alpha_2) R_X(\alpha_3)$ ; a single-qubit Euler rotation on the data qubit,  $E(\beta) = R_X(\beta_1) R_Z(\beta_2) R_X(\beta_3)$ ; and a two-qubit Heisenberg interaction gate,

$$H(\gamma) = e^{-i\pi(\gamma_1 X_* X_k + \gamma_2 Y_* Y_k + \gamma_3 Z_* Z_k)}, \quad (6)$$

where  $R_A(\theta) = e^{-i\theta A/2}$  for  $A \in \{X, Y, Z\}$ , and  $X, Y, Z$  are the Pauli operators. After all  $n_{\text{data}}$  blocks, a final Euler rotation

$E(\alpha_*)$  is applied to  $q_*$ . All rotation angles are independent trainable parameters. Critically, no gates act between pairs of data qubits, so entanglement is strictly *bipartite*: each data qubit interacts only with the output qubit. This design keeps the circuit shallow while still allowing the output qubit to aggregate information from the full data register through its sequential interactions.

The predicted probability of class  $y = 1$  is obtained by measuring the output qubit, marginalized over all data-qubit outcomes:

$$p(y = 1 \mid \mathbf{b}_i, \boldsymbol{\theta}) = \langle \Psi_{\text{out}} | (\mathbb{I}_{n_{\text{data}}} \otimes |1\rangle\langle 1|) | \Psi_{\text{out}} \rangle, \quad (7)$$

where  $|\Psi_{\text{out}}\rangle = U(\boldsymbol{\theta}) |\mathbf{b}_i\rangle \otimes |0\rangle$  and  $U(\boldsymbol{\theta})$  is the full circuit unitary.

*b) Loss function.*: The circuit is trained to maximize the predicted probability of the correct class. Because the training set may contain collisions (multiple samples mapping to the same bit-string with conflicting labels), the loss function operates on unique bit-strings after assigning each to a majority-vote class. Formally,

$$\mathcal{L}^{(q)}(\boldsymbol{\theta}) = \sum_{\mathbf{z}} f(\mathbf{z}) \left[ (1 - \lambda) (1 - p_{\mathbf{z}}) + \lambda (1 - p_{\mathbf{z}})^2 \right], \quad (8)$$

where  $p_{\mathbf{z}} = p(y = C(\mathbf{z}) \mid \mathbf{z}, \boldsymbol{\theta})$  is the predicted probability of the majority-vote class  $C(\mathbf{z})$ , and  $f(\mathbf{z})$  is the relative frequency of bit-string  $\mathbf{z}$  in the training set. The parameter  $\lambda \in [0, 1]$  blends a linear loss term ( $\lambda = 0$ ) with a squared loss term ( $\lambda = 1$ ); setting  $\lambda$  close to 1 emphasizes the squared term for most of the training, while a small linear component prevents the gradients from vanishing when  $p_{\mathbf{z}} \approx 1$ .

*c) Exact coordinate updates.*: Rather than estimating gradients by parameter-shift rules and following them by a fixed step size, parameters are updated by *exact coordinate descent*: at each step, one parameter  $\theta_j$  is minimized while all others are held fixed. This approach is feasible because each probability term  $p_{\mathbf{z}}$ , viewed as a function of a single rotation angle, is a trigonometric polynomial. Its global minimum can therefore be determined in closed form using only three measurements. This allows the loss function in Eq. 8 to be reconstructed for arbitrary values of  $\theta_j$ . Since the loss is periodic in  $\theta_j$  with period  $2\pi$ , we locate the minimum by evaluating the reconstructed loss over a  $2\pi$  interval at a chosen resolution. Here, we use a resolution of 0.001 and measure the losses using ideal simulation.

*d) Progressive subnet initialization.*: Training large quantum circuits from a random initialization risks converging to flat regions of the loss landscape, also known as barren plateaus [12]. We sidestep this by training circuits of increasing size in sequence and carrying learned parameters forward. Specifically, after training the  $n_q$ -qubit circuit, the parameters for the existing qubits are copied to seed the  $(n_q + \Delta)$ -qubit circuit, with the new qubits initialized to implement the identity transformation. This ensures that each larger circuit begins from a well-trained solution rather than a random point, so that only the new qubits need to be optimized substantially.

#### D. Discretization-Aware Fine-Tuning

*a) Why fine-tuning is necessary.*: The pre-trained foundation model was not optimized with the quantum register in mind. Its embeddings capture general chemical structure, but the quantization pipeline imposes a coarse discrete grid on top of them. A 4-qubit circuit encodes only 3 data bits, corresponding to just  $2^3 = 8$  distinct bit-strings; a 10-qubit circuit uses 9 bits and  $2^9 = 512$  strings. When a high-dimensional continuous embedding is projected onto such a coarse grid, molecules with different labels but similar embeddings tend to fall into the same bin, which is the collision problem described in Sec. II-B. Because the pre-trained model had no knowledge of this grid, it has no incentive to push opposite-class molecules to different bins.

Standard fine-tuning with cross-entropy loss improves continuous-space separability, that is, the model learns to assign high probability to the correct class, but it does not directly control whether opposite-class molecules land in different quantization bins. The gradient of the cross-entropy loss does not “see” the discretization boundary: the loss is computed from continuous logits, and a molecule that sits just on the wrong side of a bin boundary contributes no differently from one that is far away.

We address this by introducing a two-stage fine-tuning procedure, called *discretization-aware fine-tuning* (DAFT), that explicitly targets collision reduction in Stage 2. The procedure adapts the last few transformer layers of the foundation model together with a lightweight projection head  $f_{\theta} : \mathbb{R}^{d_{\text{emb}}} \rightarrow \mathbb{R}^{d_{\text{proj}}}$  (linear layer, LayerNorm, GELU activation). Keeping the earlier layers frozen preserves the broad chemical knowledge encoded during pre-training while allowing the task-specific geometry of the representation to be adjusted. The full pipeline is depicted in Fig. 1.

*1) Stage 1: Cross-Entropy Warm-Up*: Stage 1 is a standard supervised fine-tuning step that trains the backbone and projection head to be predictive of the target label in continuous space. We minimize the binary cross-entropy loss,

$$\mathcal{L}_{\text{CE}} = -\frac{1}{N} \sum_{i=1}^N [y_i \log \hat{p}_i + (1 - y_i) \log(1 - \hat{p}_i)], \quad (9)$$

where  $\hat{p}_i = \sigma(\mathbf{w}^\top f_{\theta}(\mathbf{z}_i) + b)$  is the predicted probability from a linear classification head placed on top of the projection. This loss drives the embedding to separate the two classes in the projected space, which also tends to reduce the number of collisions (because well-separated embeddings are less likely to fall in the same quantization bin), but does not guarantee collision-free representations. Stage 1 therefore acts as a warm-up that places the model in a useful region of parameter space before the more targeted Stage 2 penalty is applied.

*2) Stage 2: Soft Collision Penalty*:

*a) Step 1: Why  $|\mathcal{C}|$  cannot be minimized directly.*: The ideal objective for Stage 2 is to minimize the hard collision count  $|\mathcal{C}|$  (Eq. 5) directly. However, this is impossible with gradient-based optimization. The collision count is determined by whether two samples land in the *same bin* after quantization

(Eq. 4), and the quantization step involves a floor function  $\lfloor \cdot \rfloor$  that is piecewise constant: its gradient with respect to the embedding values is zero almost everywhere, and undefined at the bin boundaries. No matter how the backbone parameters  $\theta$  are adjusted, the gradient of  $|C|$  with respect to  $\theta$  carries no information about which direction would reduce collisions.

*b) Step 2: Replacing the hard bin assignment with a soft probability.*: We resolve this by replacing the binary bin assignment with a *differentiable soft approximation*. Instead of asking “which bin does this sample fall into?” (a hard, discontinuous question), we ask “what is the probability that this sample falls into each bin?” (a smooth, continuous answer that admits gradients).

Concretely, let  $\mathbf{e}_i = f_\theta(\mathbf{z}_i) \in \mathbb{R}^{d_{\text{proj}}}$  be the projected embedding of the  $i$ -th training sample. Because the  $d_{\text{proj}}$ -dimensional embedding is later compressed by MI-based bit allocation (Sec. II-B), only a small subset of its dimensions will actually be encoded into the quantum register. As a computationally efficient proxy for those dimensions, we select the  $K$  dimensions of *highest variance* across the mini-batch. Variance measures how spread out the values of a coordinate are; dimensions with high variance carry more information and are more likely to be assigned bits by the MI criterion. (This selection is performed with a stop-gradient so that the choice of  $K$  dimensions does not itself affect the gradients flowing to the other dimensions.) Each selected dimension  $k$  is then normalized to  $[0, 1]$ :

$$\tilde{z}_{ik} = \frac{e_{ik} - \min_j e_{jk}}{\max_j e_{jk} - \min_j e_{jk} + \epsilon}, \quad (10)$$

where  $e_{ik}$  is the  $k$ -th coordinate of  $\mathbf{e}_i$ , the min and max are taken over all samples  $j$  in the current mini-batch, and  $\epsilon$  is a small constant for numerical stability.

For  $n_b$  bits per dimension ( $2^{n_b}$  equal bins covering  $[0, 1]$ ), the center of bin  $m$  is  $c_m = (2m+1)/(2 \cdot 2^{n_b})$ . In our experiments,  $n_b = 1$ , giving two bins with centers  $c_0 = 1/4$  and  $c_1 = 3/4$ . The soft assignment of sample  $i$  to bin  $m$  in dimension  $k$ , denoted  $p_{ikm}$ , where  $i$  indexes the sample,  $k$  the dimension, and  $m$  the bin, is a Gaussian-kernel softmax centered on the bin centers:

$$p_{ikm} = \frac{\exp(-\tau (\tilde{z}_{ik} - c_m)^2)}{2^{n_b} - 1 + \sum_{m'=0}^{2^{n_b}-1} \exp(-\tau (\tilde{z}_{ik} - c_{m'})^2)}, \quad (11)$$

where  $\tau > 0$  is a temperature parameter that controls the sharpness of the assignment. When  $\tau$  is large, the Gaussian concentrates tightly around the nearest bin center, so  $p_{ikm} \rightarrow 1$  for the bin closest to  $\tilde{z}_{ik}$  and  $p_{ikm} \rightarrow 0$  for all others, which recovers the hard bin assignment of Eq. 4. When  $\tau$  is small, the distribution spreads across all bins. At any finite  $\tau$ , Eq. 11 is a smooth function of  $\tilde{z}_{ik}$ , so its gradient with respect to the backbone parameters  $\theta$  is well-defined and nonzero everywhere, allowing gradient descent to move samples toward or away from bin boundaries.

*c) Step 3: From soft assignments to a differentiable collision loss.*: Given the soft bin assignments, the probability that samples  $i$  and  $j$  both land in the same bin in dimension  $k$  is

$$P_k(i, j) = \sum_m p_{ikm} p_{jkm}. \quad (12)$$

This is simply the inner product of two probability vectors over bins: it equals 1 when both samples sit squarely inside the same bin, and approaches 0 when they are in clearly different bins. In the hard limit  $\tau \rightarrow \infty$ ,  $P_k(i, j) \rightarrow \mathbf{1}[b_{ik} = b_{jk}]$ , the indicator of a hard per-dimension collision.

To obtain a single collision probability across all  $K$  selected dimensions, one might take the product  $\prod_k P_k(i, j)$ , which would equal 1 only if both samples coincide in every dimension simultaneously. However, this product vanishes rapidly to zero as  $K$  grows (e.g., the product of eight values each equal to 0.5 is  $\approx 0.004$ ), causing severe numerical underflow during training. We therefore use the mean instead:

$$P_{\text{coll}}(i, j) = \frac{1}{K} \sum_{k=1}^K P_k(i, j). \quad (13)$$

This average collision probability is a valid differentiable surrogate for the hard-collision indicator: it is large when the two samples tend to land in the same bin across many dimensions, and small when they are well-separated.

The soft collision loss is the average of  $P_{\text{coll}}(i, j)$  over all *cross-class* pairs  $(i, j)$  in the mini-batch:

$$\mathcal{L}_{\text{SC}} = \frac{1}{|\mathcal{M}|} \sum_{(i,j) \in \mathcal{M}} P_{\text{coll}}(i, j), \quad (14)$$

where  $\mathcal{M} = \{(i, j) : y_i \neq y_j, i \neq j\}$  is the set of opposite-class pairs in the mini-batch. Minimizing  $\mathcal{L}_{\text{SC}}$  therefore pushes opposite-class pairs to land in different bins across all selected dimensions simultaneously. Same-class pairs are not included in  $\mathcal{M}$  and are not penalized, so the loss does not compress the within-class structure of the embedding; it acts only at the class boundary, which is precisely where collisions occur.

*d) Step 4: Combined Stage 2 objective.*: The full Stage 2 objective combines the cross-entropy loss, which maintains predictive accuracy in continuous space, with the soft collision penalty:

$$\mathcal{L} = \mathcal{L}_{\text{CE}} + \lambda_{\text{SC}} \mathcal{L}_{\text{SC}}, \quad (15)$$

where  $\lambda_{\text{SC}} > 0$  is chosen so that the two terms are comparable in magnitude at the start of Stage 2, ensuring balanced gradient contributions from both objectives. Stage 2 uses the same AdamW optimizer as Stage 1 but with a reduced learning rate  $\eta_2 < \eta_1$ , running for  $E_2$  epochs. Concrete values are given in Sec. III.

*e) Model selection.*: Because Stage 2 is optimizing two objectives simultaneously, the collision count and the continuous-space accuracy do not necessarily improve in lockstep. At every even epoch during Stage 2, we evaluate the hard collision count  $|C|$  and the Fisher discriminant ratio PC1 (defined below, Eq. 18) on the full training set. The checkpoint

that lexicographically minimizes ( $|\mathcal{C}|$ ,  $-\text{FisherPC1}$ ), meaning the lowest collision count first, then the highest Fisher ratio as a tiebreaker, is then restored as the final backbone before quantum training begins. This criterion ensures that we select the backbone that is best for the quantum register (low collisions) while still maintaining reasonable inter-class separation in continuous space.

3) *Ablation Conditions*: To isolate the contribution of each component, we compare four fine-tuning conditions:

**FROZEN**: No fine-tuning at all. The foundation model is used as-is, with all parameters fixed at their pre-trained values. This condition reveals the severity of the collision problem when the representation is not adapted to the quantum register.

**CE-ONLY**: Stage 1 cross-entropy fine-tuning only, extended to twice the number of epochs used in the warm-up phase of DAFT, with no Stage 2 penalty. This isolates the benefit of supervised adaptation in continuous space.

**FISHER**: Stage 1 warm-up followed by Stage 2 with a Fisher discriminant penalty instead of the soft collision loss. The Fisher discriminant is a classical criterion for linear class separability: it asks the embedding to push the two class centroids as far apart as possible, while simultaneously keeping each class internally compact.

To define it precisely, let  $\mu_c = \frac{1}{N_c} \sum_{i: y_i=c} e_i \in \mathbb{R}^{d_{\text{proj}}}$  denote the centroid (mean embedding vector) of class  $c$ , where  $N_c$  is the number of training samples in class  $c$ . The *between-class scatter*  $S_B$  measures how far the two class centroids are from each other in the projected space:

$$S_B = \|\mu_1 - \mu_0\|^2. \quad (16)$$

The *within-class scatter*  $S_W$  measures how spread out each class is around its own centroid, summed over both classes:

$$S_W = \sum_{c \in \{0,1\}} \sum_{i: y_i=c} \|e_i - \mu_c\|^2. \quad (17)$$

A small  $S_W$  means that molecules with the same label form tight clusters in embedding space; a large  $S_B$  means the two clusters are well separated. The Fisher loss maximizes the ratio  $S_B/S_W$ :

$$\mathcal{L}_{\text{Fisher}} = -\frac{S_B}{S_W + \epsilon}, \quad (18)$$

and the full Stage 2 objective under FISHER is  $\mathcal{L} = \mathcal{L}_{\text{CE}} + \lambda_{\text{Fisher}} \mathcal{L}_{\text{Fisher}}$ .

The Fisher objective is a natural and strong baseline because it represents the classical gold standard for linear class separability. Its key limitation, however, is that it operates on class centroids and aggregate scatter, not on the discrete quantization grid. A molecule sitting just across a bin boundary from an opposite-class neighbour contributes almost nothing to  $S_W$  (it is close to its centroid), so the Fisher gradient gives it almost no push. Yet it is exactly this molecule that causes a hard collision. By contrast, the soft collision loss (Eq. 14) is largest for pairs that straddle a bin boundary, and its gradient pushes those pairs apart most strongly. Comparing FISHER against SOFT-COLL therefore directly measures the benefit of targeting the quantization boundary explicitly, rather than

through a continuous-space proxy, and explains why SOFT-COLL achieves  $|\mathcal{C}| \approx 1$  while FISHER leaves  $|\mathcal{C}| \approx 128$ .

**SOFT-COLL**: Stage 1 warm-up followed by Stage 2 with the soft collision loss (our proposal). This is the full DAFT method.

All four conditions use the same preprocessing pipeline, the same quantum circuit architecture, and the same quantum training procedure. The only difference is the fine-tuning objective applied to the backbone. Specific hyperparameter values for each condition are given in Sec. III.

### E. Information-Controlled Classical Baselines

A key methodological contribution of this work is a carefully stratified set of classical baselines that controls for the information available to each model. This is essential for a fair comparison: if the quantum circuit receives only 3 bits of data ( $n_q = 4$ ) but the classical baseline operates on 384 continuous features, any performance gap could reflect the information difference rather than any inherent difference in model capability. We therefore introduce three tiers of classical baselines, each receiving a different amount of information.

a) *Tier A: Matched discrete input.*: The most critical comparison is between the quantum circuit and a classical model that receives exactly the same input, namely the same  $n_{\text{data}}$ -bit string  $\mathbf{b}_i$ , at the same qubit count  $n_q$ . A logistic regression is trained on the one-hot encoding of  $\mathbf{b}_i$  (so that each of the  $2^{n_{\text{data}}}$  possible bit-strings gets its own feature), and a decision tree is trained on the raw integer representation. Neither model has access to any information beyond the bit-string. Any difference in accuracy between the quantum circuit and a Tier-A baseline is therefore attributable to the quantum processing of the bit-string, not to a richer feature set.

b) *Tier B: Continuous PCA input.*: Two classical classifiers are trained on the  $d_{\text{PCA}}$ -dimensional continuous PCA features before any discretization. The first is logistic regression, a linear classifier that finds the hyperplane in feature space that best separates the two classes. The second is an RBF-kernel support vector machine (RBF-SVM), which uses a radial basis function kernel  $K(\mathbf{x}, \mathbf{x}') = \exp(-\gamma \|\mathbf{x} - \mathbf{x}'\|^2)$  to implicitly map the features into a high-dimensional space where a nonlinear decision boundary becomes linear; this allows it to capture curved class boundaries that logistic regression cannot. Both models receive strictly more information than the quantum circuit (continuous values rather than quantized bits) and serve as a reference for how much accuracy is lost by the discretization step.

c) *Tier C: Full fine-tuned embedding.*: Three classical classifiers are trained on the full  $d_{\text{proj}}$ -dimensional fine-tuned embedding, without any dimensionality reduction or quantization: logistic regression, RBF-SVM (as described above), and a multi-layer perceptron (MLP) with one hidden layer. An MLP is a feedforward neural network that learns nonlinear transformations of the input through multiple layers of weighted connections followed by activation functions; it is strictly more expressive than both logistic regression and SVMs on continuous data. Together, these three models represent

the unconstrained classical upper bound: the best accuracy achievable from the fine-tuned features with no quantum circuit and no bit-budget constraint.

### III. EXPERIMENTAL SETUP

#### A. Dataset and Protocol

We evaluate on the blood-brain barrier permeability (BBBP) benchmark from MoleculeNet [13], a binary classification task predicting whether a molecule can cross the blood-brain barrier, which is a critical property for central nervous system drug candidates. The dataset contains 2039 molecules; we use Bemis–Murcko scaffold-based splitting [14] to create train/test folds that respect chemical diversity and reflect real-world distribution shifts. After splitting, training and test sets are balanced to 300 and 75 molecules per class respectively, giving 600 training and 150 test molecules. Experiments are repeated over five random seeds (42, 0, 1, 7, 123) governing data subsampling and model initialization; results are reported as mean  $\pm$  std over valid seeds.

#### B. Models and Baselines

We use ChemBERTa-77M [10], [11] as the foundation model, with the last two of six transformer layers unfrozen for fine-tuning and a projection head mapping to 64 dimensions. The preprocessing pipeline (Sec. II-B) uses  $d_{\text{PCA}} = 16$  principal components and is refit at each qubit level from training data only. Quantum circuits are trained using the Red Cedar framework [7] with exact coordinate updates, bipartite entanglement, and exact statevector simulation; circuits at  $n_q \in \{4, 6, 8, 10\}$  are trained in sequence using progressive subnet initialization.

#### C. Statistical Reporting

We report accuracies on the test dataset for each model. All per-seed differences  $\delta_s = \text{QML acc}_s - \text{lr-bit acc}_s$  are reported individually to make the evidence transparent. We additionally report the mean  $\bar{\delta}$ , Cohen’s  $d = \bar{\delta}/s_{\delta}$  as the primary effect-size measure, and one-sample  $t$ -test  $p$ -values as a supplementary reference. Because the sample size is small ( $n \leq 5$  seeds),  $p$ -values have limited power and should be interpreted alongside  $d$  and the per-seed results; we flag this explicitly when reporting statistics. We use the following notation: lr-bit: logistic regression with discretized data; lr-cont: logistic regression with continuous data.

### IV. RESULTS

#### A. Fine-Tuning Objective: Representation Quality and Accuracy

Table I summarizes the effect of each fine-tuning condition on collision count, Fisher PC1, and downstream QML accuracy at  $n_q = 4$  (3 data bits,  $2^3 = 8$  possible bit-string patterns). Fisher PC1 is the inter-class Fisher ratio along the first principal component of the 16-dimensional compressed embedding,  $(\mu_{1,\text{PC1}} - \mu_{0,\text{PC1}})^2 / (\sigma_{0,\text{PC1}}^2 + \sigma_{1,\text{PC1}}^2)$ ; higher values indicate better linear separability in continuous space. The qubit count  $n_q = 4$  is deliberately small here: the purpose of this table

TABLE I  
EFFECT OF FINE-TUNING OBJECTIVE ON REPRESENTATION QUALITY AND QML ACCURACY (BBBP,  $n_q = 4$ , 3 DATA BITS).  $|\mathcal{C}|$ : MEAN COLLISION-PAIR COUNT OVER VALID SEEDS; FISHER PC1: INTER-CLASS FISHER RATIO ON THE FIRST PCA AXIS (HIGHER IS BETTER); QML ACC: MEAN  $\pm$  STD ( $n = 4$  FOR SOFT-COLL,  $n = 5$  OTHERWISE); LR-CONT (TIER-B): LOGISTIC REGRESSION ON  $d_{\text{PCA}}$ -DIMENSIONAL CONTINUOUS PCA FEATURES, AN UPPER-BOUND REFERENCE. CE-ONLY AND SOFT-COLL SELECT CHECKPOINTS BY MINIMIZING  $|\mathcal{C}|$  FIRST; FISHER SELECTS BY MAXIMIZING FISHER PC1 FIRST (SEC. V-C).

| Condition | $ \mathcal{C} $ | Fisher PC1 | QML acc           | lr-cont acc |
|-----------|-----------------|------------|-------------------|-------------|
| FROZEN    | 11 544          | 1.1        | $0.760 \pm 0.000$ | 0.840       |
| CE-ONLY   | $\approx 39$    | 296        | $0.891 \pm 0.020$ | 0.891       |
| FISHER    | $\approx 128$   | 103        | $0.872 \pm 0.016$ | 0.891       |
| SOFT-COLL | $\approx 1$     | 203        | $0.883 \pm 0.013$ | 0.883       |

is not to compare quantum against classical (that comparison is reserved for  $n_q = 10$  in Table II), but to show how each fine-tuning objective reshapes the embedding before it enters the quantum register.

a) *Finding 1: Fine-tuning is the primary performance driver.*: All three fine-tuned conditions lift QML accuracy by (+11)–(+13) pp over FROZEN, establishing that representation alignment, rather than circuit design, is the dominant factor. The frozen backbone produces 11 544 collision-pairs, exceeding the full training set size of 600 samples: every bit-string in the training data contains at least one conflicting label pair, making correct classification structurally impossible for any downstream model. Once fine-tuning is applied, collisions drop dramatically and accuracy rises correspondingly.

b) *Finding 2: Collision count and Fisher PC1 measure different things.*: The three fine-tuning objectives produce noticeably different outcomes on the two quality metrics. Cross-entropy fine-tuning (CE-ONLY) reduces collisions by two orders of magnitude to  $\approx 98$  and achieves the highest Fisher PC1 (301), confirming that task-specific supervision reshapes the embedding toward better separability. The Fisher discriminant (FISHER) achieves a similar collision count ( $\approx 88$ ) but with a substantially lower Fisher PC1 (95 vs. 301), illustrating that maximizing continuous-space separability and minimizing discrete collision count are partially orthogonal objectives: an embedding can score well on one while performing poorly on the other. The soft collision penalty (SOFT-COLL) reduces collisions to  $\approx 1$ , the lowest of all conditions, while maintaining Fisher PC1 at 194, demonstrating that directly targeting the quantization boundary achieves both goals simultaneously.

c) *Finding 3: Fine-tuning closes the information-budget gap.*: Under FROZEN, QML achieves 0.760, which is 8 pp below lr-cont (0.840) even though lr-cont operates on  $d_{\text{PCA}}$  continuous features while QML uses only 3 quantized bits. After fine-tuning, QML (0.883–0.891) matches lr-cont (0.883–0.891) within statistical noise, regardless of the fine-tuning objective. The fine-tuned 3-bit representation carries essentially the same class-discriminative information as the full continuous embedding, demonstrating that DAFT successfully concentrates the label-relevant structure into the limited bit budget.

TABLE II

NUMBER OF UNIQUE TRAINING BIT-STRINGS UNDER SOFT-COLL ACROSS QUBIT LEVELS (SEEDS 42, 0, 7, 123;  $n = 4$  VALID SEEDS). “UNIQUE” IS THE MEAN NUMBER OF DISTINCT BIT-STRINGS IN THE TRAINING SET AFTER COLLISION REMOVAL. QML ACCURACY IS CONSTANT AT  $0.883 \pm 0.013$  ACROSS ALL FOUR QUBIT LEVELS, REFLECTING THE EFFECTIVENESS OF PROGRESSIVE SUBNET INITIALIZATION. THE QUANTUM-VS.-CLASSICAL COMPARISON AT  $n_q = 10$  IS IN TABLE III.

| $n_q$ | unique |
|-------|--------|
| 4     | 7.0    |
| 6     | 18.0   |
| 8     | 41.0   |
| 10    | 72.2   |

*d) Finding 4: QML nearly matches unconstrained classical baselines despite severe information compression.*: Under SOFT-COLL at  $n_q = 10$ , the quantum circuit ( $0.883 \pm 0.013$ ) approaches the accuracy of Tier-B classifiers trained on the full 16-dimensional continuous PCA features ( $0.887 \pm 0.014$ ) and Tier-C classifiers trained on the complete 64-dimensional fine-tuned embedding ( $0.888 \pm 0.014$ ), falling short by only 0.5 pp and 0.5 pp respectively, and this is despite operating on only 9 quantized bits rather than continuous features. Tier-B and Tier-C receive  $16\times$  or  $64\times$  more dimensions and retain all continuous-valued information lost through quantization, yet their accuracy advantage over QML is negligible after DAFT. This confirms that the fine-tuning procedure successfully concentrates the label-relevant information of the high-dimensional continuous representation into the constrained discrete bit budget.

#### B. Qubit Scaling and Information-Controlled Quantum Advantage

Table II reports the number of unique bit-strings seen during training at each qubit level under the SOFT-COLL condition. QML accuracy, which is constant across all four qubit levels, is given in the caption. The primary quantum-vs.-classical comparison is at  $n_q = 10$  (Table III); the purpose of Table II is to demonstrate the stability of QML accuracy across qubit levels, which is a consequence of progressive subnet initialization.

The primary result is at  $n_q = 10$  qubits, where the quantum register is rich enough ( $2^9 = 512$  possible bit-string patterns) for the quantum circuit to exploit its entanglement structure, and the effect of DAFT is most clearly visible.

*a) The central finding: DAFT benefits the quantum circuit far more than the classical baseline.*: Under SOFT-COLL, DAFT raises QML accuracy by +12.2 pp relative to the frozen backbone (from 0.761 to 0.883; Table III). The matched classical lr-bit baseline also improves under DAFT, but by only +3.4 pp (from 0.821 to 0.855): the quantum circuit gains more than three times as much accuracy from the same improvement to the representation. This asymmetry arises because the quantum circuit and the logistic regression process the bit-string in qualitatively different ways. A logistic regression trained on one-hot features learns a linear decision boundary

over the  $2^{n_{\text{data}}}$  possible bit-string patterns. The quantum circuit instead processes the bit-string through an entangling unitary that creates correlations across qubits, encoding higher-order feature interactions that a linear model cannot capture. DAFT, by concentrating class-discriminative information into collision-free bit-strings, provides the quantum circuit with exactly the structured input needed to exploit these interactions.

Because the improvement differential is so large (+12.2 pp vs. +3.4 pp), the comparison reverses entirely. Under FROZEN, the classical lr-bit baseline outperforms QML at 10q by 6.0 pp (Cohen’s  $d = 4.50$ ,  $n = 5$ , all seeds agree in direction): the quantum circuit is crippled by the corrupted training signal. Under SOFT-COLL, QML surpasses the classical baseline by +2.8 pp (Cohen’s  $d = 2.06$ ,  $n = 4$ ;  $p = 0.026$  for reference). All four valid seeds show a positive advantage (+2.0, +4.0, +4.0, +1.3 pp for seeds 42, 0, 7, 123), confirming the result is not driven by a single outlier. The same reversal is independently confirmed under the FISHER condition (+2.3 pp at 10q,  $d = 3.81$ ,  $p = 0.001$ ,  $n = 5$ ; see below).

*b) Stability of QML accuracy across qubit counts.*: As shown in Table II, QML accuracy under SOFT-COLL is  $0.883 \pm 0.013$  at every qubit level from 4 to 10. Progressive subnet initialization successfully carries the learned 4-qubit solution to larger circuits without loss of accuracy, consistent with the expectation that the information bottleneck (the finite bit budget) rather than circuit capacity is the limiting factor. The qubit-scaling curve for QML is therefore flat: once the representation is collision-free and the 4-qubit circuit has learned a good solution, scaling to more qubits adds discriminative power (more unique bit-string patterns, as shown in the “unique” column) without sacrificing what was already learned.

*c) The classical baseline is evaluated at  $n_q = 10$  only.*: The lr-bit classical baseline (logistic regression trained on the same bit-string as the quantum circuit) does not require a sequential qubit-scaling protocol and is reported only at  $n_q = 10$ . Its accuracy under SOFT-COLL is  $0.855 \pm 0.006$ , below the quantum circuit’s  $0.883 \pm 0.013$ .

*d) The Fisher condition corroborates the result independently.*: We additionally validate using all 5 seeds under FISHER, for which no seed exclusion is needed. As under SOFT-COLL, QML accuracy under FISHER is constant across qubit levels 4–8 (also  $0.872 \pm 0.016$ ), consistent with progressive subnet initialization. At  $n_q = 10$ , QML reaches  $0.872 \pm 0.016$  against lr-bit  $0.849 \pm 0.020$ , a +2.3 pp advantage ( $d = 3.81$ ,  $p = 0.001$ ,  $n = 5$ ). Because this uses all 5 seeds without any exclusion, it provides stronger statistical evidence than the SOFT-COLL result and confirms that the quantum advantage is not an artifact of the excluded seed.

#### C. DAFT as a Necessary Condition

Table III directly shows the reversal that DAFT produces at  $n_q = 10$ , comparing the FROZEN and SOFT-COLL conditions side by side.

Without DAFT (FROZEN), the quantum circuit achieves only  $0.761 \pm 0.007$  at 10 qubits while the matched lr-bit classical

baseline reaches  $0.822 \pm 0.012$ , a gap of  $-6.0$  pp in favor of the classical model ( $p = 0.001$ ,  $n = 5$ ). This can be understood as follows. 11 544 collision-pairs in the frozen embedding corrupt the quantum circuit’s training signal so severely that circuit optimization cannot recover, while the lr-bit baseline retains some statistical regularity in its one-hot feature space even under high collision rates.

With DAFT (SOFT-COLL), the quantum circuit gains  $+12.2$  pp (to 0.883) and the classical baseline gains  $+3.3$  pp (to 0.855). The quantum circuit’s gain is more than three times larger, reversing the comparison to  $+2.8$  pp in favor of the quantum circuit ( $p = 0.026$ ,  $n = 4$ ).

DAFT is therefore necessary, since without it the quantum circuit cannot match a simple logistic regression, and it is also differentially beneficial: the same improvement to the representation produces a far larger accuracy gain for the quantum circuit than for the classical baseline.

## V. DISCUSSION

### A. Why the Quantum Circuit Benefits More from DAFT than the Classical Baseline

The central result of this paper goes beyond the observation that the quantum circuit outperforms the classical baseline at 10 qubits after DAFT: DAFT produces a differential improvement, since both models benefit, but the quantum circuit gains  $+12.2$  pp while the classical lr-bit baseline gains only  $+3.4$  pp. Understanding why this asymmetry arises is key to interpreting the result.

The fundamental reason is that the quantum circuit and the logistic regression process the bit-string in qualitatively different ways. A logistic regression trained on one-hot features of the bit-string  $\mathbf{b}_i$  learns a separate weight for each possible bit-string pattern and outputs a linear combination. At 10 qubits ( $2^9 = 512$  patterns, but only  $\approx 72$  seen during training), the model must generalize from seen to unseen patterns by interpolating in the one-hot feature space. When DAFT reduces collisions, the training signal becomes less noisy, and the logistic regression can fit the training patterns more accurately; but it still faces the same generalization challenge to unseen bit-strings.

The quantum circuit, by contrast, processes the bit-string through a parameterized entangling unitary. The Heisenberg interaction gates create quantum correlations between the output qubit and each data qubit, building an amplitude distribution

over basis states that encodes higher-order feature interactions, the kind of interactions that cannot be represented by a linear model. When DAFT produces a collision-free representation where bit 0 vs. bit 1 in each dimension reliably predicts the class label, the quantum circuit can exploit this structure through its entanglement; the logistic regression sees the same bit-string but cannot leverage higher-order correlations. The result is that the quality of the representation matters far more to the quantum circuit than to the classical one.

The comparison is information-controlled at the discrete input level: both the quantum circuit and the lr-bit baseline receive exactly the same bit-string  $\mathbf{b}_i$  for each sample. The quantum advantage is therefore attributable to how the quantum circuit processes that information through entanglement and higher-order qubit interactions, not to access to richer features.

### B. Interpretation of the Quantum Advantage

The statistically significant quantum advantage of  $+2.8$  pp at 10q ( $p = 0.026$ ) under SOFT-COLL should be understood in the context of the broader finding. The primary claim is not “quantum circuits are generically superior to classical models on molecular classification.” The claim is more specific: DAFT improves both models, but the quantum circuit benefits more than three times as much ( $+12.2$  pp vs.  $+3.4$  pp), and this differential improvement reverses the comparison from classical-wins to quantum-wins. The quantum advantage is attributable to how the quantum circuit processes the bit-string, namely through entanglement and higher-order qubit interactions, and not to access to richer features. The same reversal is independently confirmed under the FISHER condition across all 5 seeds ( $+2.3$  pp at 10q,  $p = 0.001$ ,  $d = 3.81$ ), ruling out the possibility that the result is an artifact of the SOFT-COLL condition or the excluded seed.

### C. Collision Count as a Performance Predictor

The four fine-tuned/frozen conditions rank as SOFT-COLL ( $\approx 1$ ) < CE-ONLY ( $\approx 39$ ) < FISHER ( $\approx 128$ ) < FROZEN (11 544) in collision count. This is a  $n_q$ -independent proxy computed during Stage-2 training (Table I). We assess what this ordering predicts at  $n_q = 10$ , the qubit count at which our primary claim (Sec. IV-A) is made. The relevant quantity is the QML-lr-bit gap. lr-bit is a linear classifier (logistic regression) trained on the same bit-strings the quantum circuit receives. Under CE-ONLY, this gap at  $n_q = 10$  is  $+0.4\text{pp} \pm 2.7\text{pp}$  across five seeds. The sign changes in two of them; the linear baseline wins on seeds 0 and 123. Under SOFT-COLL, the same gap is  $+2.8\text{pp} \pm 1.4\text{pp}$  and is positive on every seed tested. The residual  $\approx 39$  collisions left by CE-ONLY leave some class-separable structure in the bit-strings. On some seeds a linear model exploits this structure as well as the quantum circuit does, which erases or reverses the gap. SOFT-COLL’s near-elimination of collisions removes this headroom for the linear baseline. This is what makes the gap reproducible across seeds. FISHER’s larger collision count has a different cause. Its checkpoint-selection criterion prioritizes the Fisher discriminant ratio over collision minimization. This is not a weaker ability of

TABLE III  
QUANTUM-VS.-CLASSICAL COMPARISON AT  $n_q = 10$ : FROZEN VS. SOFT-COLL. DAFT REVERSES THE COMPARISON FROM  $-6.0$  pp (CLASSICAL WINS) TO  $+2.8$  pp (QUANTUM WINS), DRIVEN BY A DIFFERENTIAL DAFT GAIN OF  $+12.2$  pp FOR QML VS.  $+3.4$  pp FOR LR-BIT.

| Condition        | QML acc           | lr-bit acc        | $p$            |
|------------------|-------------------|-------------------|----------------|
| FROZEN (no DAFT) | $0.761 \pm 0.007$ | $0.821 \pm 0.012$ | .001 ( $n=5$ ) |
| SOFT-COLL (DAFT) | $0.883 \pm 0.013$ | $0.855 \pm 0.006$ | .026 ( $n=4$ ) |
| DAFT gain        | $+12.2$ pp        | $+3.4$ pp         |                |

cross-entropy fine-tuning to suppress collisions. While collision count is certainly an important measure of QML accuracy, as evidenced by the large gain over FROZEN, it alone does not uniquely determine the accuracy. It also indicates how much structure remains for a matched linear classical model to exploit. The amount of such structure determines how robust and seed-independent the gap will be as  $n_q$  grows. SOFT-COLL is the only condition whose Stage-2 objective directly targets the quantization boundary, via a differentiable surrogate (Eq. 14). This is why it alone drives  $|C|$  to near zero. It is the condition used for the qubit-scaling claim in Sec. IV-A.

Correspondingly, SOFT-COLL and CE-ONLY both select checkpoints using the criterion ( $|C|$ ,  $-\text{FisherPC1}$ ). Both minimize collision count first. FISHER instead selects by maximizing Fisher PC1 first, with collision count only as a tiebreaker (Table I). Among the conditions that do select on collision count first, SOFT-COLL achieves the better outcome on both metrics simultaneously.

## VI. CONCLUSION

We have introduced discretization-aware fine-tuning (DAFT), a method that shapes chemical foundation model embeddings specifically for downstream bit-bit quantum machine learning. The key ingredient is a differentiable soft collision penalty that directly minimizes the probability that opposite-class samples receive the same discrete code after quantization.

Applied to ChemBERTa-77M on the BBBP benchmark, DAFT reduces collisions from 11 544 (frozen backbone) to approximately 1 on average, and raises quantum classifier accuracy by 12.3 percentage points over the frozen baseline.

Through a four-condition ablation and an information-controlled evaluation protocol, we establish two complementary statistical results:

- 1) Without DAFT, the logistic regression trained on the identical quantized bit-string outperforms the quantum circuit at 10 qubits by 6.0 pp (Cohen’s  $d = 4.50$ , all 5 seeds agree). Discretization-aware fine-tuning is a necessary condition for quantum competitiveness in this regime.
- 2) With DAFT, both models improve relative to the frozen baseline, but the quantum circuit benefits far more (+12.2 pp) than the matched classical baseline (+3.4 pp). At 10 qubits, all four valid seeds show a positive QML advantage (+2.0, +4.0, +4.0, +1.3 pp; mean +2.8 pp, Cohen’s  $d = 2.06$ ). The same reversal is independently confirmed under the Fisher condition across all 5 seeds (+2.3 pp,  $d = 3.81$ ). The lower gain for the classical model is not caused by DAFT; it reflects the structural difficulty of generalizing a logistic regression across the sparse  $2^9 = 512$ -pattern bit-string space from only  $\approx 72$  unique training examples.

These findings point to a design principle for hybrid quantum-classical pipelines: the information bottleneck imposed by the quantum register must be addressed at the representation level, not only at the circuit level. Aligning the upstream continuous embedding to the discrete structure of the quantum register,

using objectives that directly target collision reduction, is not a peripheral optimization step but a prerequisite for meaningful quantum advantage in the information-constrained setting.

## VII. SOFTWARE FRAMEWORK

The techniques in the paper are implemented using Red Cedar, a commercial software framework for quantum machine learning being developed at Cascade Quantum, Inc, previously known as Coherent Computing, Inc. It can be made available upon request.

## REFERENCES

- [1] S. H. Kim, J. Mei, C. Grotto, M. Yamada, and M. Roetteler, “Quantum large language model fine-tuning,” 2025.
- [2] M. S. Rudolph, N. B. Toussaint, A. Katabarwa, S. Johri, B. Peropadre, and A. Perdomo-Ortiz, “Generation of high-resolution handwritten digits with an ion-trap quantum computer,” *Phys. Rev. X*, vol. 12, p. 031010, Jul 2022.
- [3] M. Wang, X. Xue, M. Gao, and P. V. Coveney, “Quantum-informed machine learning for predicting spatiotemporal chaos with practical quantum advantage,” *Science Advances*, vol. 12, no. 16, p. eaec5049, 2026.
- [4] M. Schuld, R. Sweke, and J. J. Meyer, “Effect of data encoding on the expressive power of variational quantum-machine-learning models,” *Phys. Rev. A*, vol. 103, p. 032430, 2021.
- [5] M. Schuld, A. Bocharov, K. Svore, and N. Wiebe, “Circuit-centric quantum classifiers,” *arXiv e-prints*, p. arXiv:1804.00633, Apr. 2018.
- [6] A. D. Corcoles, A. Kandala, A. Javadi-Abhari, D. T. McClure, A. W. Cross, K. Temme, P. D. Nation, M. Steffen, and J. M. Gambetta, “Challenges and Opportunities of Near-Term Quantum Computing Systems,” *IEEE Proceedings*, vol. 108, pp. 1338–1352, Aug. 2020.
- [7] S. Johri, “Bit-bit encoding, optimizer-free training and sub-net initialization: techniques for scalable quantum machine learning,” *arXiv e-prints*, p. arXiv:2501.02148, Jan. 2025.
- [8] S. Leither, M. Kubal, and S. Johri, “How many qubits does a machine learning problem require?,” 2026.
- [9] A. Pérez-Salinas, A. Cervera-Lierta, E. Gil-Fuster, and J. I. Latorre, “Data re-uploading for a universal quantum classifier,” *Quantum*, vol. 4, p. 226, Feb. 2020.
- [10] S. Chithrananda, G. Grand, and B. Ramsundar, “ChemBERTa: Large-Scale Self-Supervised Pretraining for Molecular Property Prediction,” *arXiv e-prints*, p. arXiv:2010.09885, Oct. 2020.
- [11] W. Ahmad, E. Simon, S. Chithrananda, G. Grand, and B. Ramsundar, “ChemBERTa-2: Towards Chemical Foundation Models,” *arXiv e-prints*, p. arXiv:2209.01712, Sept. 2022.
- [12] J. R. McClean, S. Boixo, V. N. Smelyanskiy, R. Babbush, and H. Neven, “Barren plateaus in quantum neural network training landscapes,” *Nature Communications*, vol. 9, p. 4812, Nov. 2018.
- [13] Z. Wu, B. Ramsundar, E. N. Feinberg, J. Gomes, C. Geniesse, A. S. Pappu, K. Leswing, and V. Pande, “MoleculeNet: A Benchmark for Molecular Machine Learning,” *arXiv e-prints*, p. arXiv:1703.00564, Mar. 2017.
- [14] G. W. Bemis and M. A. Murcko, “The Properties of Known Drugs. 1. Molecular Frameworks,” *Journal of Medicinal Chemistry*, vol. 39, pp. 2887–2893, Jan. 1996.