

Linux安装MySQL8.0.22 (基于CentOS 7 X86)

1.去官网下载安装包

下载链接：

<https://dev.mysql.com/downloads/>

试用水印

MySQL Community Downloads

- MySQL Yum Repository
- MySQL APT Repository
- MySQL SUSE Repository
- MySQL Community Server**
- MySQL Cluster
- MySQL Router
- MySQL Shell
- MySQL Workbench
- MySQL Installer for Windows
- MySQL for Visual Studio
- C API (libmysqlclient)
- Connector/C++
- Connector/J
- Connector/NET
- Connector/Node.js
- Connector/ODBC
- Connector/Python
- MySQL Native Driver for PHP
- MySQL Benchmark Tool
- Time zone description tables
- Download Archives

点击下载

ORACLE

© 2020, Oracle Corporation and/or its affiliates

[Legal Policies](#) | [Your Privacy Rights](#) | [Terms of Use](#) | [Trademark Policy](#) | [Contributor Agreement](#) | [Cookie 喜好设置](#)

The screenshot shows the MySQL Community Downloads page for MySQL Community Server 8.0.22. The 'General Availability (GA) Releases' tab is selected. Under 'Select Operating System:', a dropdown menu is open, showing various operating systems. 'Red Hat Enterprise Linux / Oracle Linux' is highlighted. A red arrow points to the dropdown arrow, labeled '第1步 点开下拉菜单'. Another red arrow points to the highlighted option, labeled '第2步 选择自己需要下载的版本'. Below the dropdown, there is a table of download links. The first row is for 'Windows (x86, 64-bit), ZIP Archive' (8.0.22, 191.4M). The second row is for 'Windows (x86, 64-bit), ZIP Archive Debug Binaries & Test Suite' (8.0.22, 434.4M). Both rows have a 'Download' button. At the bottom, there is a note: 'We suggest that you use the MD5 checksums and GnuPG signatures to verify the integrity of the packages you'.

Operating System	Version	Size	Download
Windows (x86, 64-bit), ZIP Archive	8.0.22	191.4M	Download
Windows (x86, 64-bit), ZIP Archive Debug Binaries & Test Suite	8.0.22	434.4M	Download

2. 查看系统是否已经安装mariadb

```
rpm -qa | grep mariadb
```

如果有信息，将mariadb卸载

```
rpm -e --nodeps mariadb-libs-5.5.60-1.el7_5.x86_64
```

3.安装MySQL依赖包libaio

```
yum install libaio
```

```
[root@localhost ~]# yum install libaio
已加载插件：fastestmirror, langpacks
Loading mirror speeds from cached hostfile
 * base: mirrors.aliyun.com
 * extras: mirrors.aliyun.com
 * updates: mirrors.aliyun.com
软件包 libaio-0.3.109-13.el7.x86_64 已安装并且是最新版本
无须任何处理
[root@localhost ~]#
```

4. 创建MySQL安装目录和数据存放目录

```
mkdir /usr/local/mysql
mkdir /usr/local/mysql/mysqlbdb
```

5. 创建MySQL组：创建MySQL用户，并设置密码。


```
useradd mysql
passwd mysql
```

6. 将mysql目录的权限授给mysql用户和mysql组。

```
chown -R mysql:mysql /usr/local/mysql
```

7. 上传安装包(FileZilla SecureCRT都可以 上传)

FileZilla:

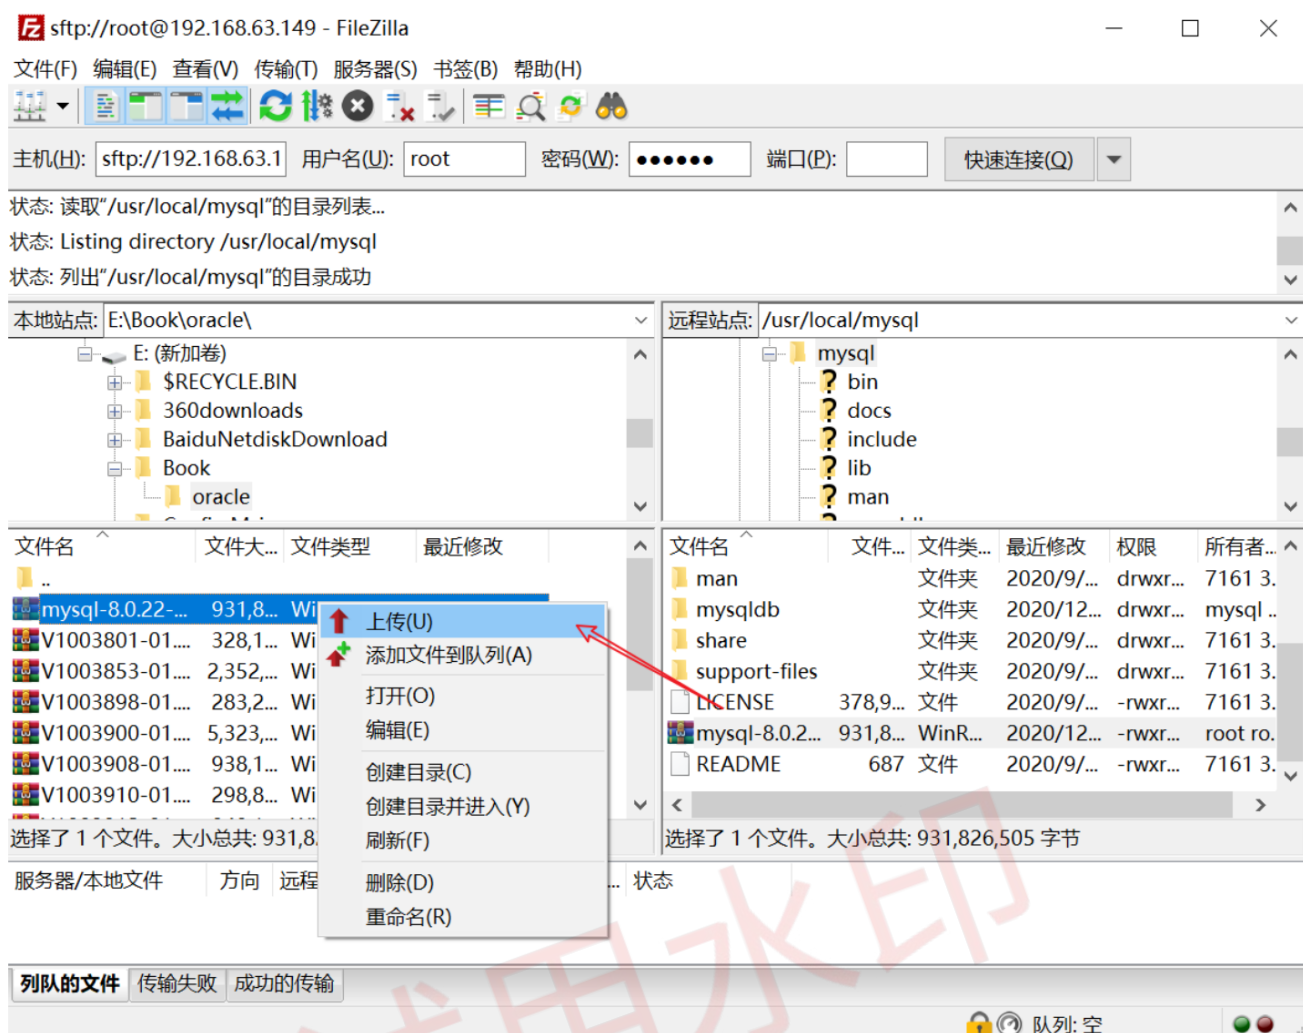

SecureCRT:

1. Alt + p 进入ftp界面
2. cd /usr/local/mysql/ # 进入到要上传的目录
3. put E:\Book\oracle\mysql-8.0.27-e17-x86_64.tar.gz # 将目标文件上传

```
sftp> pwd
/root
sftp> cd /usr/local/mysql/
sftp> pwd
/usr/local/mysql
sftp> put E:\Book\oracle\mysql-8.0.22-e17-x86_64.tar.gz
Uploading mysql-8.0.22-e17-x86_64.tar.gz to /usr/local/mysql/mysql-8.0.22-e17-x86_64.tar.gz
100% 909986KB 53528KB/s 00:00:17
E:\Book\oracle\mysql-8.0.22-e17-x86_64.tar.gz: 931826505 bytes transferred in 17 seconds (53528 KB/s)
```

8.解压安装包

```
1. cd /usr/local/mysql

2. tar -zxvf mysql-8.0.27-e17-x86_64.tar.gz

3. mv mysql-8.0.27-e17-x86_64/* ./ #将mysql-8.0.27-e17-x86_64目录下的所有文件移动到/usr/local/mysql目录下

4. rm -rf mysql-8.0.27-e17-x86_64 mysql-8.0.27-e17-x86_64.tar.gz #解压完后可以将mysql-8.0.27-e17-x86_64目录和压缩包删除
```

9.给mysql目录授权

```
chmod -R 777 /usr/local/mysql
chmod -R 777 /usr/local/mysql/mysql/db/
```

10.在系统根目录的/etc创建MySQL的安装初始化配置文件my.cnf

创建my.cnf文件

```
vim /etc/my.cnf
```

内容如下:

```
[mysqld]
# 设置3306端口
port=3306
# 设置mysql的安装目录
basedir=/usr/local/mysql
# 设置mysql数据库的数据的存放目录
datadir=/usr/local/mysql/mysql/db
# 允许最大连接数
max_connections=10000
# 允许连接失败的次数。这是为了防止有人从该主机试图攻击数据库系统
max_connect_errors=10
# 服务端使用的字符集默认为UTF8
character-set-server=utf8
# 创建新表时将使用的默认存储引擎
default-storage-engine=INNODB
# 默认使用“mysql_native_password”插件认证
default_authentication_plugin=mysql_native_password
[mysql]
# 设置mysql客户端默认字符集
default-character-set=utf8
[client]
# 设置mysql客户端连接服务端时默认使用的端口
port=3306
default-character-set=utf8
```

11.安装MySQL8.0.27

1、进入MySQL安装目录的bin目录下

```
cd /usr/local/mysql/bin
```

2、执行命令，并记住随机密码

```
./mysqld --initialize --console
```

```
[root@localhost bin]# ./mysqld --initialize --console
2020-12-18T02:50:51.564432Z 0 [System] [MY-013169] [Server] /usr/local/mysql/bin/mysqld (mysqld 8.0.22) initializing of server in progress as process 12251
2020-12-18T02:50:51.565692Z 0 [Warning] [MY-013242] [Server] --character-set-server='utf8' is currently an alias for the character set UTF8MB3, but will be an alias for UTF8
MB4 in a future release. Please consider using UTF8MB4 in order to be unambiguous.
2020-12-18T02:50:51.601316Z 1 [System] [MY-013576] [InnoDB] InnoDB initialization has started.
2020-12-18T02:50:52.071080Z 1 [System] [MY-013577] [InnoDB] InnoDB initialization has ended.
2020-12-18T02:50:53.546200Z 6 [Note] [MY-010454] [Server] A temporary password is generated for root@localhost: BdyVkvB1/:FW
```

12.启动MySQL服务

- 1、cd /usr/local/mysql/support-files #进入support-files
- 2、./mysql.server start #启动mysql服务

PS: 此处容易出现的问题:

1、启动MySQL服务时报 my_print_defaults: 未找到命令错误。

```
[root@localhost support-files]# ./mysql.server start
./mysql.server:行239: my_print_defaults: 未找到命令
Starting MySQL ERROR! Couldn't find MySQL server (/usr/local/mysql/bin/mysqld_safe)
```

解决方法：检查并修改 /etc/my.cnf 中的 MySQL的安装目录！

```
[mysqld]
# 设置3306端口
port=3306
# 设置mysql的安装目录
basedir=/usr/local/mysql
# 设置mysql数据库的数据的存放目录
datadir=/usr/local/mysql/mysql/db
# 允许最大连接数
max_connections=10000
# 允许连接失败的次数。这是为了防止有人从该主机试图攻击数据库系统
max_connect_errors=10
# 服务端使用的字符集默认为UTF8
character-set-server=utf8
# 创建新表时将使用的默认存储引擎
default-storage-engine=INNODB
# 默认使用“mysql_native_password”插件认证
default_authentication_plugin=mysql_native_password
[mysql]
# 设置mysql客户端默认字符集
default-character-set=utf8
[client]
# 设置mysql客户端连接服务端时默认使用的端口
port=3306
default-character-set=utf8
```

检查my.cnf文件中的mysql安装目录的地址是否与创建的一致，如果不一致改成MySQL的安装目录。

2.报without updating PID file错误

```
[root@localhost support-files]# ./mysql.server start
Starting MySQL.Logging to '/usr/local/mysql/mysql/db/localhost.localdomain.err'.
ERROR! The server quit without updating PID file (/usr/local/mysql/mysql/db/localhost.localdomain.pid).
```

解决办法:

该问题出现的原因是解压mysql的tar包文件, 权限不够。 **也需要重启服务器:**

```
chmod -R 777 /usr/local/mysql
chmod -R 777 /usr/local/mysql/mysql/db
```

13.将MySQL加入系统进程中

```
1、cp mysql.server /etc/init.d/mysqld
```

然后重启MySQL服务:

```
2、service mysqld restart
```

14.创建一个软连接到 /usr/bin。--一定要执行成功, 否则启动不了!

```
ln -s /usr/local/mysql/bin/mysql /usr/bin
```

```
[root@localhost ~]# mysql -uroot -p
Enter password:
Welcome to the MySQL monitor. Commands end with ; or \g.
Your MySQL connection id is 10
Server version: 8.0.22 MySQL Community Server - GPL

Copyright (c) 2000, 2020, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> █
```

PS:

由于/usr/bin已经添加到环境变量PATH中了, 只需要将mysql的软连接添加到/usr/bin即可全局访问

15.修改登录密码

```
mysql> ALTER USER 'root'@'localhost' IDENTIFIED WITH mysql_native_password BY 'abc123';
```

```
mysql> ALTER USER 'root'@'localhost' IDENTIFIED WITH mysql_native_password BY '123456';
Query OK, 0 rows affected (0.02 sec)
```

16.设置允许远程登录

```
1、mysql> use mysql;
2、mysql> update user set user.Host='%' where user.User='root';

3、mysql> flush privileges;
```

```
mysql> use mysql
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
mysql> update user set user.Host='%' where user.User='root';
Query OK, 1 row affected (0.01 sec)
Rows matched: 1  Changed: 1  Warnings: 0

mysql> flush privileges;
Query OK, 0 rows affected (0.00 sec)
```

退出MySQL:

```
mysql> quit;
```

重启MySQL服务:

```
service mysqld restart
```

检查3306端口是否开放

```
netstat -nupl|grep 3306
```

开放3306端口

```
firewall-cmd --permanent --add-prot=3306/tcp
```

重启防火墙

```
firewall-cmd --reload
```

至此MySQL安装完成!