


include/linux/bootconfig.h

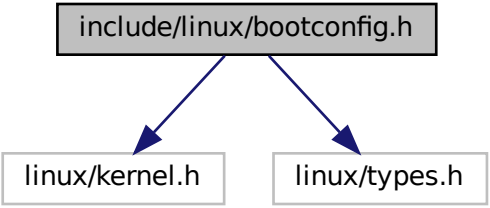

```
graph TD; A[include/linux/bootconfig.h] --> B[linux/kernel.h]; A --> C[linux/types.h];
```

The diagram illustrates a header file dependency. At the top, a grey rectangular box contains the text 'include/linux/bootconfig.h'. Two blue arrows originate from the bottom center of this box and point downwards to two separate white rectangular boxes. The left box contains the text 'linux/kernel.h' and the right box contains the text 'linux/types.h'. This visualizes that 'bootconfig.h' includes both 'kernel.h' and 'types.h'.

linux/kernel.h

linux/types.h