


include/uapi/linux
/dlm_device.h

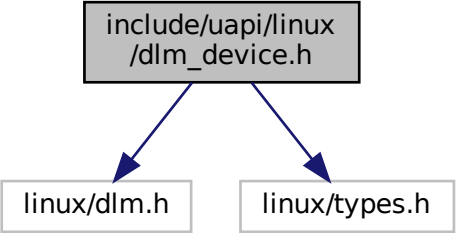

```
graph TD; A["include/uapi/linux/dlm_device.h"] --> B["linux/dlm.h"]; A --> C["linux/types.h"];
```

The diagram illustrates a header file dependency. A central box at the top, labeled 'include/uapi/linux/dlm_device.h', has two blue arrows pointing downwards to two separate boxes below it. The left box is labeled 'linux/dlm.h' and the right box is labeled 'linux/types.h'. This indicates that the top-level header file includes both of these other header files.

linux/dlm.h

linux/types.h