


include/linux/platform
_data/ds620.h

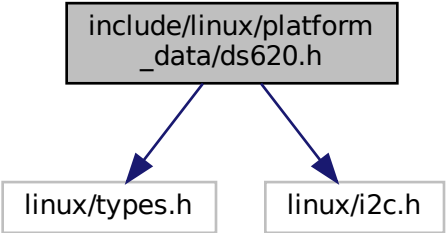

```
graph TD; A["include/linux/platform_data/ds620.h"] --> B["linux/types.h"]; A --> C["linux/i2c.h"]
```

The diagram illustrates a header file dependency. A central box at the top contains the text 'include/linux/platform_data/ds620.h'. Two blue arrows originate from the bottom of this box and point downwards to two separate boxes. The left box contains 'linux/types.h' and the right box contains 'linux/i2c.h'. This represents the 'ds620.h' header file including both 'linux/types.h' and 'linux/i2c.h'.

linux/types.h

linux/i2c.h