


include/uapi/linux
/bpf_perf_event.h

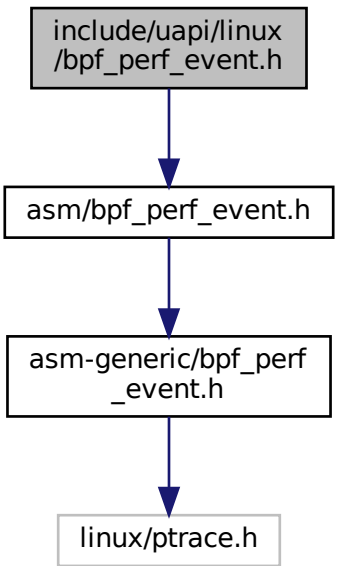

```
graph TD; A["include/uapi/linux  
/bpf_perf_event.h"] --> B["asm/bpf_perf_event.h"]; B --> C["asm-generic/bpf_perf  
_event.h"]; C --> D["linux/ptrace.h"];
```

The diagram is a vertical flowchart with four rectangular boxes connected by downward-pointing blue arrows. The boxes contain the following text from top to bottom: 'include/uapi/linux /bpf_perf_event.h', 'asm/bpf_perf_event.h', 'asm-generic/bpf_perf _event.h', and 'linux/ptrace.h'. The first box has a gray background, while the others are white with black borders.

asm/bpf_perf_event.h

asm-generic/bpf_perf
_event.h

linux/ptrace.h