


include/uapi/linux
/dvb/video.h

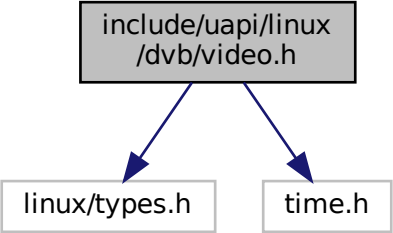

```
graph TD; A["include/uapi/linux<br/>/dvb/video.h"] --> B["linux/types.h"]; A --> C["time.h"]
```

The diagram illustrates a header file dependency. A central box at the top contains the text 'include/uapi/linux /dvb/video.h'. Two blue arrows originate from the bottom of this box and point downwards to two separate boxes. The left box contains 'linux/types.h' and the right box contains 'time.h'. All boxes have a thin black border.

linux/types.h

time.h