


include/linux/ioasid.h

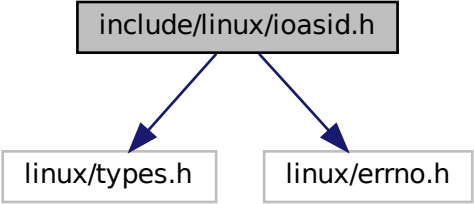

```
graph TD; A[include/linux/ioasid.h] --> B[linux/types.h]; A --> C[linux/errno.h];
```

The diagram illustrates a header file dependency. At the top, a grey rectangular box contains the text 'include/linux/ioasid.h'. Two blue arrows originate from the bottom center of this box and point downwards to two separate white rectangular boxes. The left box contains the text 'linux/types.h' and the right box contains the text 'linux/errno.h'. This visualizes that the 'include/linux/ioasid.h' header file includes both 'linux/types.h' and 'linux/errno.h'.

linux/types.h

linux/errno.h