


include/linux/cuda.h

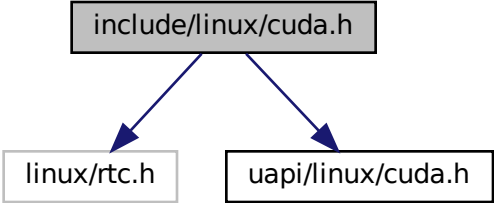

```
graph TD; A[include/linux/cuda.h] --> B[linux/rtc.h]; A --> C[uapi/linux/cuda.h]
```

The diagram illustrates a header file relationship. At the top, a box labeled 'include/linux/cuda.h' has two blue arrows pointing downwards to two separate boxes. The left box is labeled 'linux/rtc.h' and the right box is labeled 'uapi/linux/cuda.h'.

linux/rtc.h

uapi/linux/cuda.h