


include/uapi/linux
/net_timestamp.h

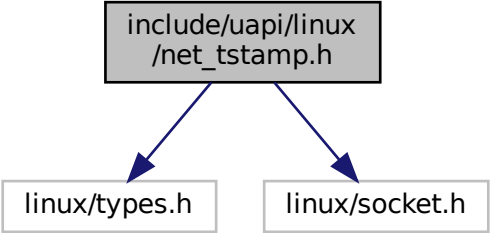

```
graph TD; A["include/uapi/linux/net_timestamp.h"] --> B["linux/types.h"]; A --> C["linux/socket.h"]
```

The diagram illustrates a header file dependency. At the top, a gray box contains the text 'include/uapi/linux/net_timestamp.h'. Two blue arrows point downwards from this box to two separate white boxes below. The left box contains 'linux/types.h' and the right box contains 'linux/socket.h'.

linux/types.h

linux/socket.h