


include/uapi/linux
/reiserfs_fs.h

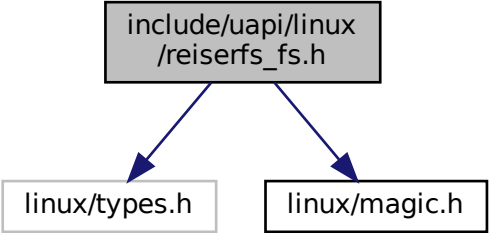

```
graph TD; A["include/uapi/linux/reiserfs_fs.h"] --> B["linux/types.h"]; A --> C["linux/magic.h"];
```

The diagram illustrates a header file dependency. A central box at the top, labeled 'include/uapi/linux/reiserfs_fs.h', has two blue arrows pointing downwards to two separate boxes below it. The left box is labeled 'linux/types.h' and the right box is labeled 'linux/magic.h'. This indicates that the reiserfs_fs.h header file includes definitions from both types.h and magic.h.

linux/types.h

linux/magic.h