


include/linux/mmc/slot
-gpio.h

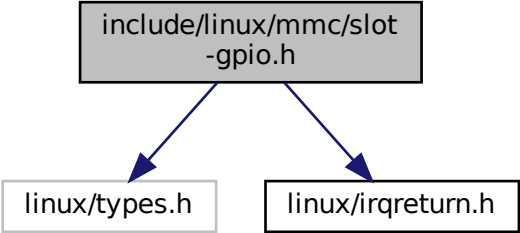

```
graph TD; A["include/linux/mmc/slot-gpio.h"] --> B["linux/types.h"]; A --> C["linux/irqreturn.h"];
```

The diagram illustrates the header file dependencies for `include/linux/mmc/slot-gpio.h`. It is shown as a central box at the top with two arrows pointing downwards to two other boxes: `linux/types.h` on the left and `linux/irqreturn.h` on the right.

linux/types.h

linux/irqreturn.h