


include/linux/sched  
/task\_stack.h

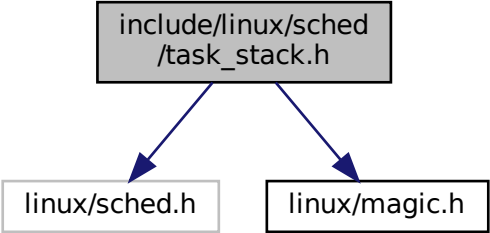

```
graph TD; A["include/linux/sched/task_stack.h"] --> B["linux/sched.h"]; A --> C["linux/magic.h"];
```

The diagram illustrates a header file inclusion relationship. At the top, a gray box contains the text 'include/linux/sched/task\_stack.h'. Two blue arrows point downwards from the bottom edge of this box to two separate white boxes below. The left arrow points to a box containing 'linux/sched.h', and the right arrow points to a box containing 'linux/magic.h'.

linux/sched.h

linux/magic.h