


twl_i2c_read_u16

twl_i2c_read_u8

twl_i2c_read

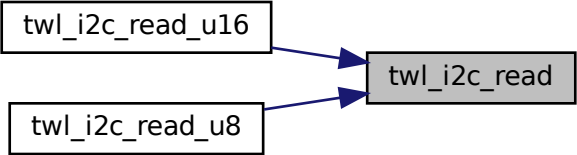

```
graph LR; A[twl_i2c_read_u16] --> C[twl_i2c_read]; B[twl_i2c_read_u8] --> C;
```

The diagram illustrates a relationship between three functions. On the left, there are two white rectangular boxes with black borders. The top box contains the text 'twl_i2c_read_u16' and the bottom box contains 'twl_i2c_read_u8'. On the right, there is a gray rectangular box with a black border containing the text 'twl_i2c_read'. Two blue arrows originate from the right side of the left boxes and point towards the left side of the gray box, indicating that both 'twl_i2c_read_u16' and 'twl_i2c_read_u8' are related to or point to 'twl_i2c_read'.