


include/uapi/linux
/agpgart.h

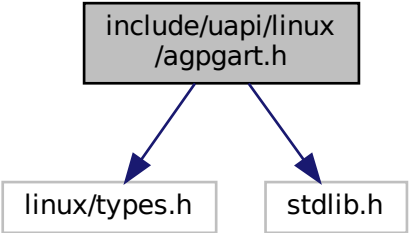

```
graph TD; A["include/uapi/linux/agpgart.h"] --> B["linux/types.h"]; A --> C["stdlib.h"]
```

The diagram illustrates a header file dependency. At the top, a gray box contains the text 'include/uapi/linux/agpgart.h'. Two blue arrows originate from the bottom of this box and point downwards to two separate white boxes. The left box contains 'linux/types.h' and the right box contains 'stdlib.h'. This represents the preprocessor directives #include <linux/types.h> and #include <stdlib.h> within the file 'include/uapi/linux/agpgart.h'.

linux/types.h

stdlib.h