


include/uapi/linux
/loop.h

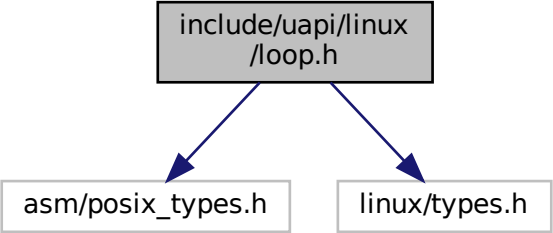

```
graph TD; A["include/uapi/linux/loop.h"] --> B["asm/posix_types.h"]; A --> C["linux/types.h"];
```

The diagram illustrates a header file dependency. A central box at the top represents the file `include/uapi/linux/loop.h`. Two arrows originate from the bottom of this box, pointing downwards and outwards to two separate boxes below. The left box contains the text `asm/posix_types.h` and the right box contains the text `linux/types.h`. This visualizes that `loop.h` includes both `asm/posix_types.h` and `linux/types.h`.

asm/posix_types.h

linux/types.h