


include/uapi/linux
/phonet.h

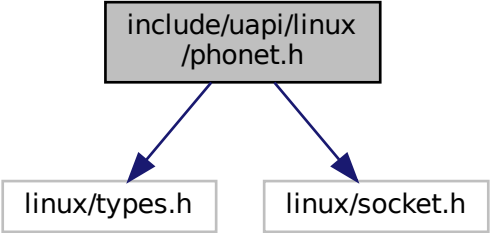

```
graph TD; A["include/uapi/linux/phonet.h"] --> B["linux/types.h"]; A --> C["linux/socket.h"]
```

The diagram illustrates a header file dependency. At the top, a gray box contains the text 'include/uapi/linux/phonet.h'. Two blue arrows originate from the bottom of this box. The left arrow points to a white box containing 'linux/types.h'. The right arrow points to a white box containing 'linux/socket.h'.

linux/types.h

linux/socket.h