

Java Streams: Short-Circuit Operations

Douglas C. Schmidt

d.schmidt@vanderbilt.edu

www.dre.vanderbilt.edu/~schmidt



Professor of Computer Science


**Institute for Software
Integrated Systems**

**Vanderbilt University
Nashville, Tennessee, USA**



Learning Objectives in this Part of the Lesson


- Understand the structure & functionality of stream aggregate operations
 - Intermediate operations
 - Terminal operations
 - Short-circuit operations

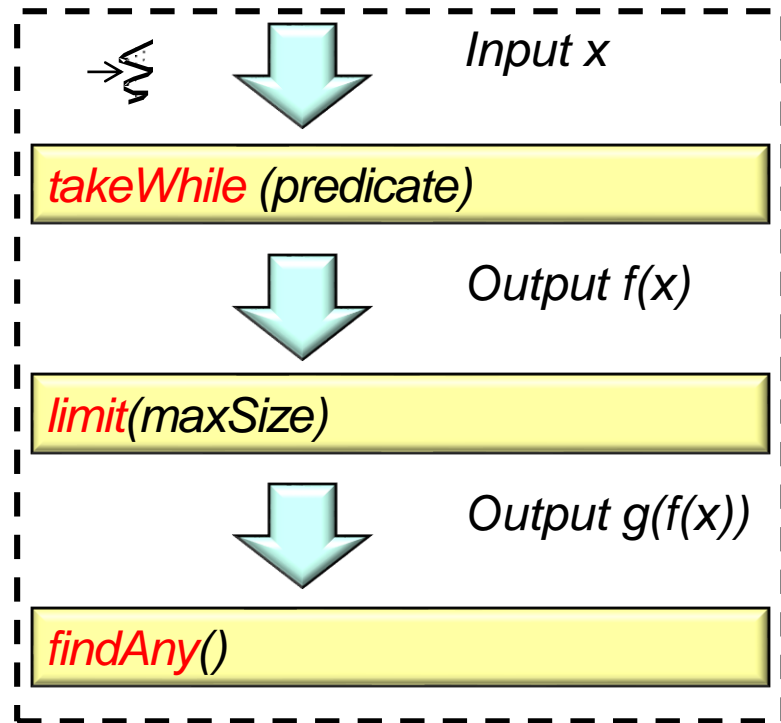

Java 8 Streams Short-Circuit Operations


Java 8 Streams Short-Circuit Operations

- An aggregate operation *may* process all elements in a stream

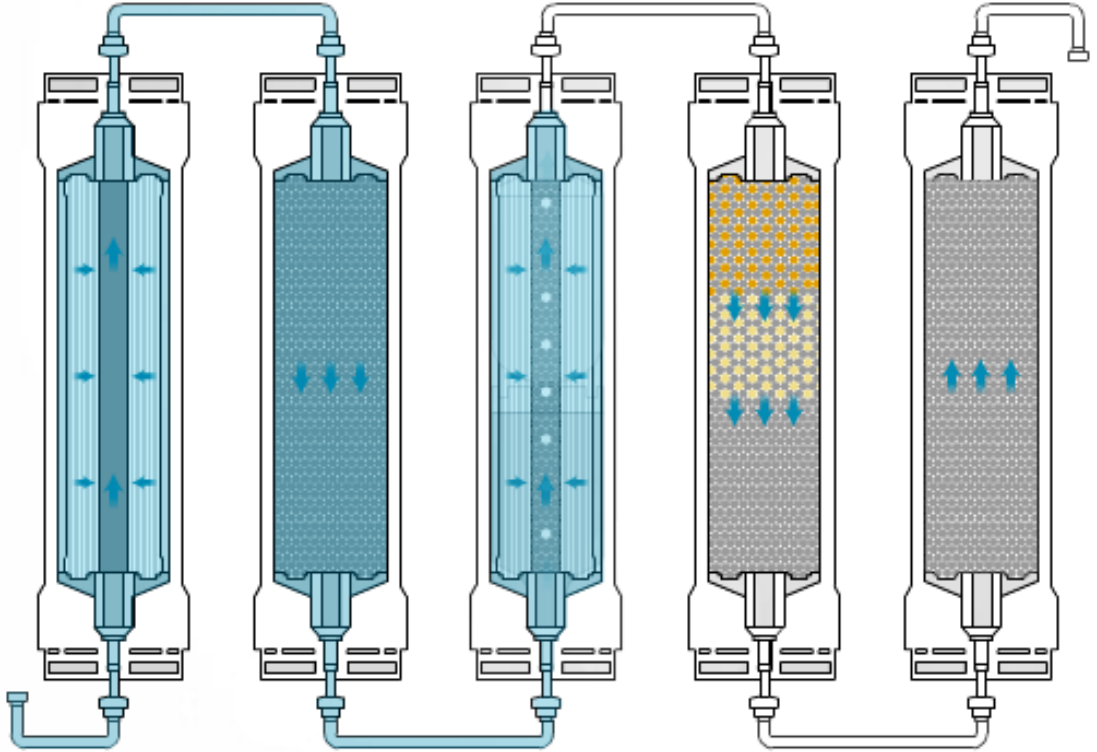



Java 8 Streams Short-Circuit Operations

- An aggregate operation *may* process all elements in a stream, e.g.
 - `map()` processes all of the elements in its input stream

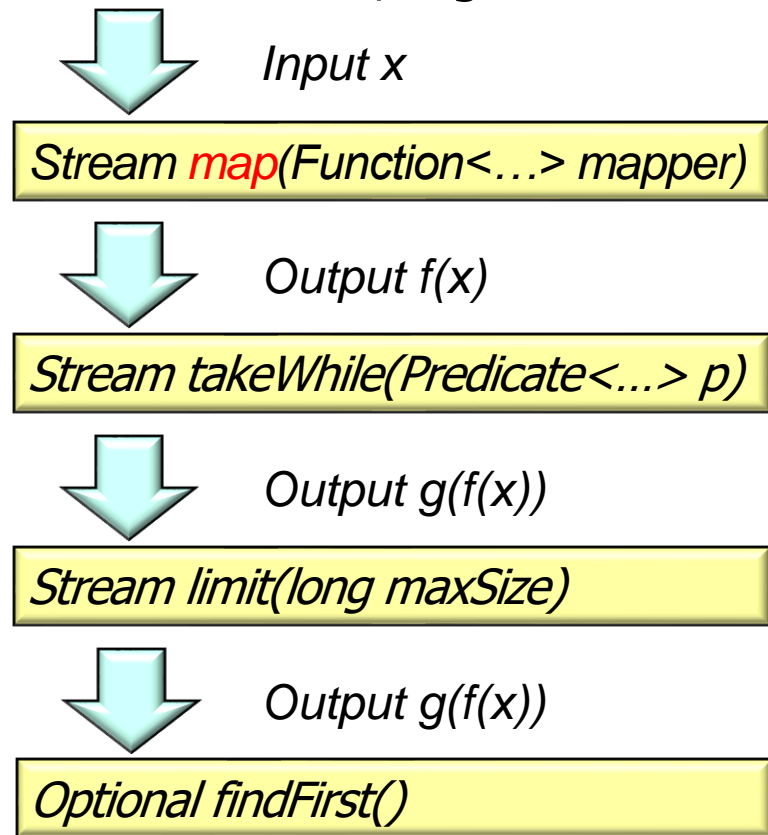

Java 8 Streams Short-Circuit Operations


- An aggregate operation *may* process all elements in a stream, e.g.
 - `map()` processes all of the elements in its input stream
 - Unless a behavior throws an exception..

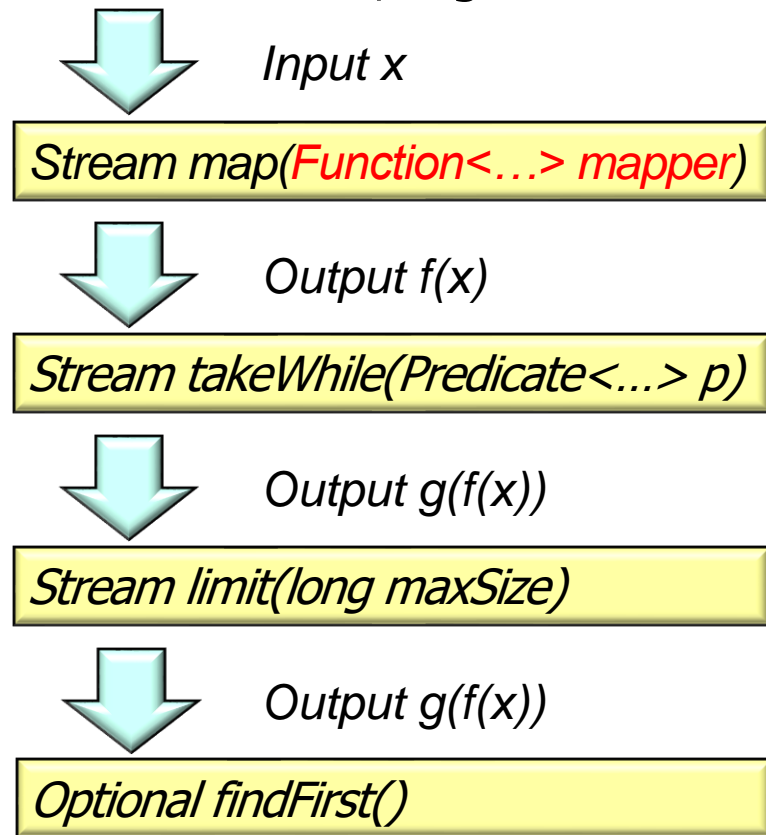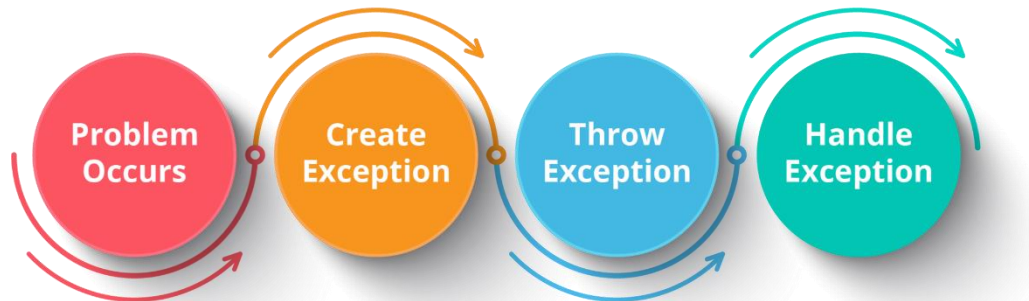

See vanilla-java.github.io/2016/06/21/Reviewing-Exception-Handling.html

Java 8 Streams Short-Circuit Operations


- An aggregate operation *may* process all elements in a stream, e.g.
 - `map()` processes all of the elements in its input stream
 - “Short-circuit” operations halt further processing after reaching their condition

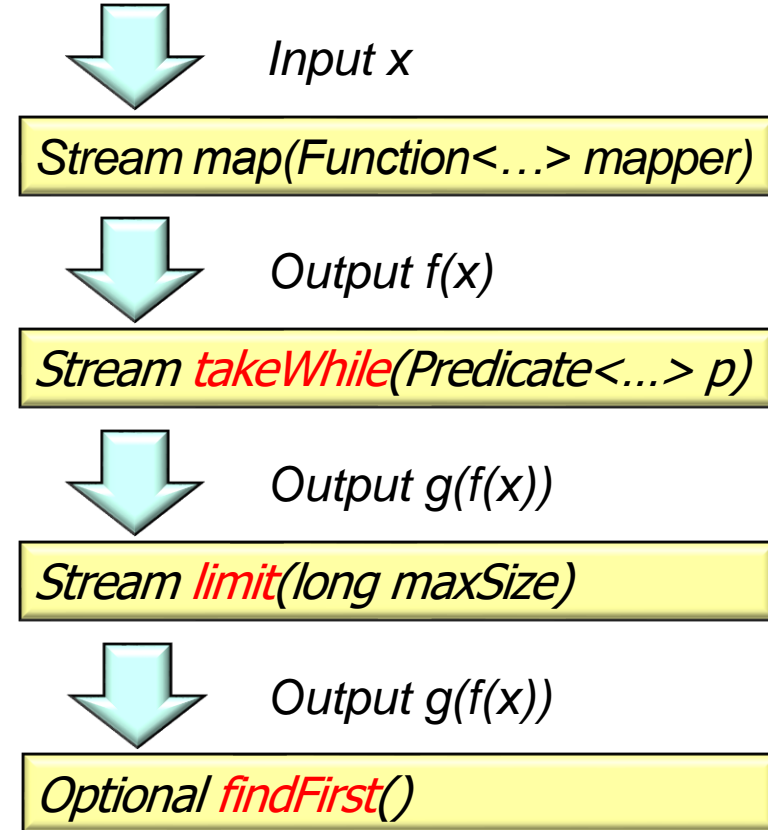

See www.logicbig.com/tutorials/core-java-tutorial/java-util-stream/short-circuiting

Java 8 Streams Short-Circuit Operations


- An aggregate operation *may* process all elements in a stream, e.g.
 - `map()` processes all of the elements in its input stream
 - “Short-circuit” operations halt further processing after reaching their condition
 - `takeWhile()`
 - A short-circuit intermediate operation that returns a stream consisting of a subset of elements taken from this stream that match the given predicate

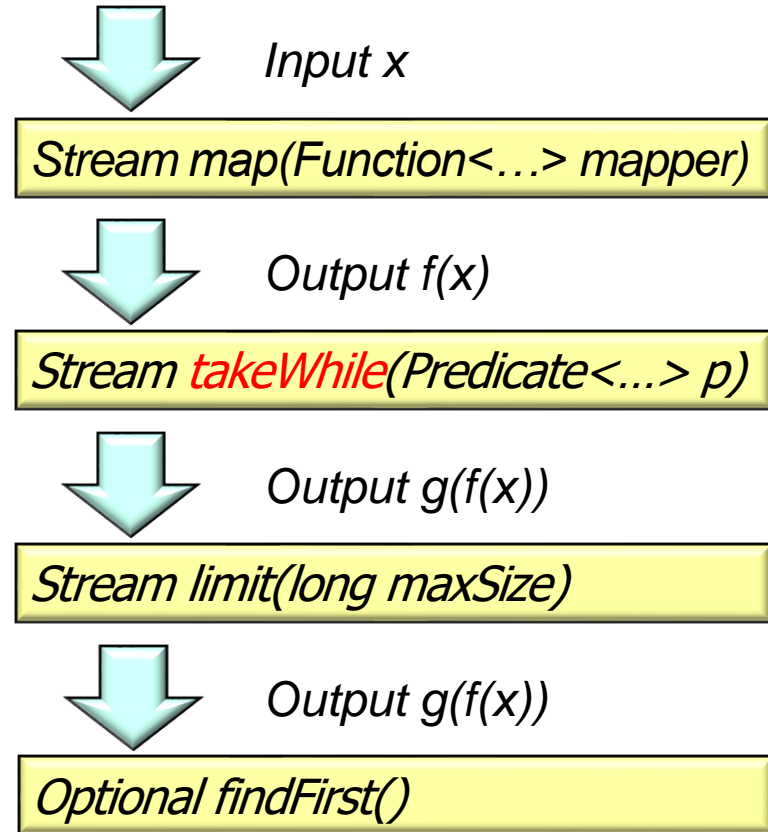

See docs.oracle.com/javase/9/docs/api/java/util/stream/Stream.html#takeWhile

Java 8 Streams Short-Circuit Operations


- An aggregate operation *may* process all elements in a stream, e.g.
 - `map()` processes all of the elements in its input stream
 - “Short-circuit” operations halt further processing after reaching their condition
 - `takeWhile()`
 - `limit()`
 - A short-circuit intermediate operation that causes a stream to operate on a reduced size

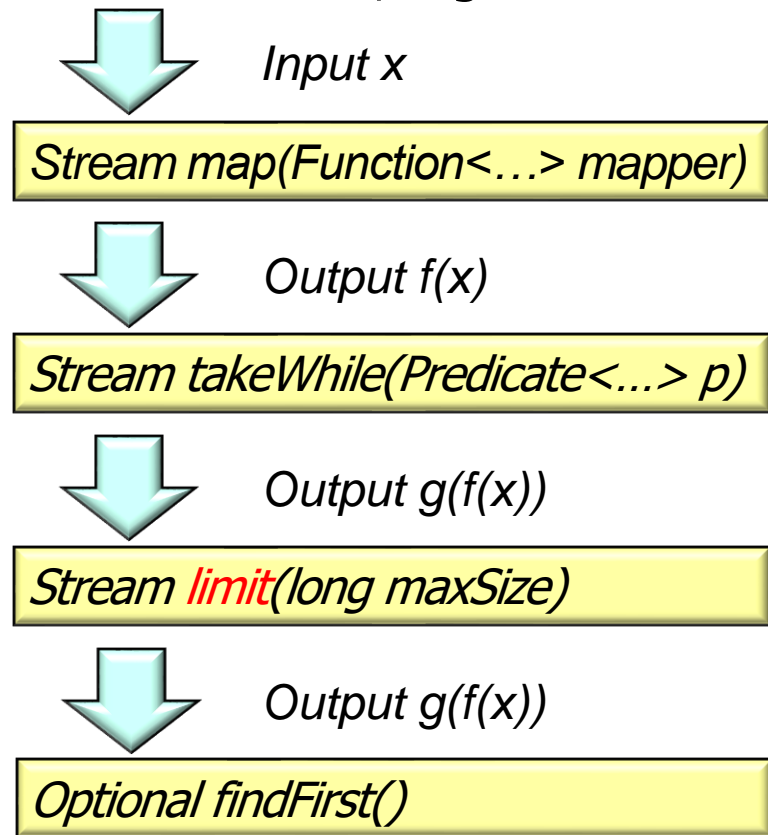

See docs.oracle.com/javase/8/docs/api/java/util/stream/Stream.html#limit

Java 8 Streams Short-Circuit Operations

- An aggregate operation *may* process all elements in a stream, e.g.
 - `map()` processes all of the elements in its input stream
- “Short-circuit” operations halt further processing after reaching their condition
 - `takeWhile()`
 - `limit()`
 - `findFirst()`, `findAny()`, `anyMatch()`, `allMatch()`, & `noneMatch()`
 - Short-circuit terminal operations can finish before traversing all elements in the underlying stream

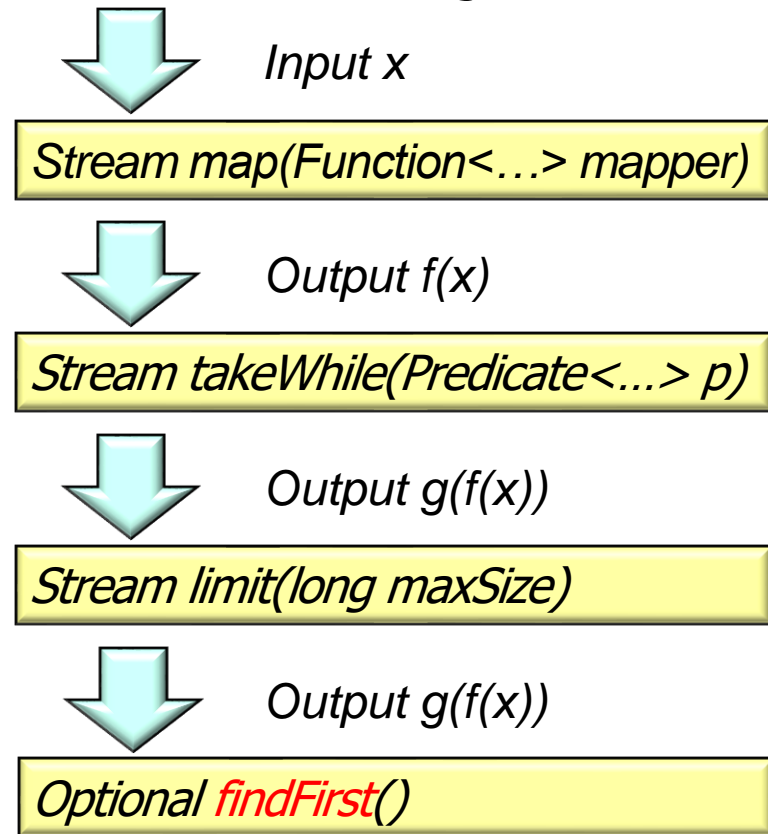

See dzone.com/articles/collectors-part-1-%E2%80%93-reductions

End of Java Streams: Short-Circuit Operations