



Data Mining Association Analysis

马锦华

数据科学与计算机学院
中山大学



Association Rule Mining

- Given a set of transactions, find rules that will predict the occurrence of an item based on the occurrences of other items in the transaction

Market-Basket transactions

<i>TID</i>	<i>Items</i>
1	Bread, Milk
2	Bread, Diaper, Beer, Eggs
3	Milk, Diaper, Beer, Coke
4	Bread, Milk, Diaper, Beer
5	Bread, Milk, Diaper, Coke

Example of Association Rules

$\{\text{Diaper}\} \rightarrow \{\text{Beer}\},$
 $\{\text{Milk, Bread}\} \rightarrow \{\text{Eggs, Coke}\},$
 $\{\text{Beer, Bread}\} \rightarrow \{\text{Milk}\},$

Implication means co-occurrence,
not causality!



Definition: Frequent Itemset

- **Itemset**

- A collection of one or more items
 - Example: {Milk, Bread, Diaper}
- k-itemset
 - An itemset that contains k items

<i>TID</i>	<i>Items</i>
1	Bread, Milk
2	Bread, Diaper, Beer, Eggs
3	Milk, Diaper, Beer, Coke
4	Bread, Milk, Diaper, Beer
5	Bread, Milk, Diaper, Coke

- **Support count (σ)**

- Frequency of occurrence of an itemset
- E.g. $\sigma(\{\text{Milk, Bread, Diaper}\}) = 2$

- **Support**

- Fraction of transactions that contain an itemset
- E.g. $s(\{\text{Milk, Bread, Diaper}\}) = 2/5$

- **Frequent Itemset**

- An itemset whose support is greater than or equal to a *minsup* threshold



Definition: Association Rule

- Association Rule

- An implication expression of the form $X \rightarrow Y$, where X and Y are itemsets
- Example:
 $\{\text{Milk, Diaper}\} \rightarrow \{\text{Beer}\}$

- Rule Evaluation Metrics

- Support (s)
 - ◆ Fraction of transactions that contain both X and Y
- Confidence (c)
 - ◆ Measures how often items in Y appear in transactions that contain X

<i>TID</i>	<i>Items</i>
1	Bread, Milk
2	Bread, Diaper, Beer, Eggs
3	Milk, Diaper, Beer, Coke
4	Bread, Milk, Diaper, Beer
5	Bread, Milk, Diaper, Coke

Example:

$\{\text{Milk, Diaper}\} \Rightarrow \{\text{Beer}\}$

$$s = \frac{\sigma(\text{Milk, Diaper, Beer})}{|T|} = \frac{2}{5} = 0.4$$

$$c = \frac{\sigma(\text{Milk, Diaper, Beer})}{\sigma(\text{Milk, Diaper})} = \frac{2}{3} = 0.67$$




Association Rule Mining Task

- Given a set of transactions T , the goal of association rule mining is to find all rules having
 - support $\geq \textit{minsup}$ threshold
 - confidence $\geq \textit{minconf}$ threshold
 - Brute-force approach:
 - List all possible association rules
 - Compute the support and confidence for each rule
 - Prune rules that fail the *minsup* and *minconf* thresholds
- ⇒ **Computationally prohibitive!**



Computational Complexity

- Given d unique items:
 - Total number of itemsets = 2^d
 - Total number of possible association rules:

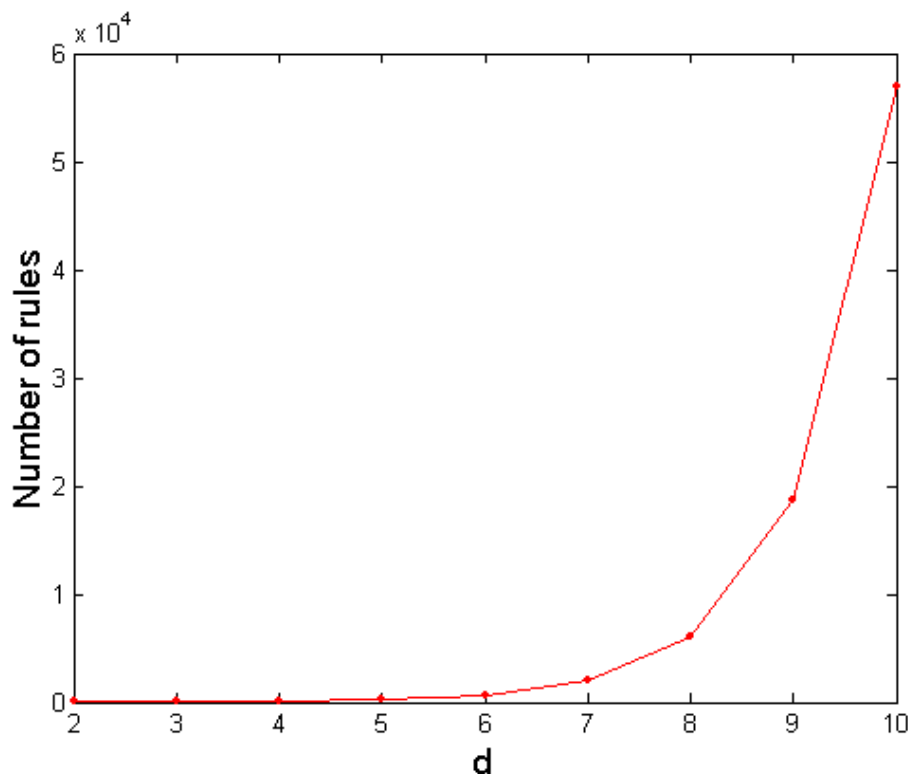

$$R = \sum_{k=1}^d \left[\binom{d}{k} \times \sum_{j=1}^{d-k} \binom{d-k}{j} \right]$$
$$= 3^d - 2^{d+1} + 1$$

If $d=6$, $R = 602$ rules



Mining Association Rules

<i>TID</i>	<i>Items</i>
1	Bread, Milk
2	Bread, Diaper, Beer, Eggs
3	Milk, Diaper, Beer, Coke
4	Bread, Milk, Diaper, Beer
5	Bread, Milk, Diaper, Coke

Example of Rules:

$\{\text{Milk, Diaper}\} \rightarrow \{\text{Beer}\}$ ($s=0.4, c=0.67$)

$\{\text{Milk, Beer}\} \rightarrow \{\text{Diaper}\}$ ($s=0.4, c=1.0$)

$\{\text{Diaper, Beer}\} \rightarrow \{\text{Milk}\}$ ($s=0.4, c=0.67$)

$\{\text{Beer}\} \rightarrow \{\text{Milk, Diaper}\}$ ($s=0.4, c=0.67$)

$\{\text{Diaper}\} \rightarrow \{\text{Milk, Beer}\}$ ($s=0.4, c=0.5$)

$\{\text{Milk}\} \rightarrow \{\text{Diaper, Beer}\}$ ($s=0.4, c=0.5$)

Observations:

- All the above rules are binary partitions of the same itemset:
 $\{\text{Milk, Diaper, Beer}\}$
- Rules originating from the same itemset have identical support but can have different confidence
- Thus, we may decouple the support and confidence requirements




Mining Association Rules

- Two-step approach:
 1. Frequent Itemset Generation
 - Generate all itemsets whose support \geq minsup
 2. Rule Generation
 - Generate high confidence rules from each frequent itemset, where each rule is a binary partitioning of a frequent itemset
- Frequent itemset generation is still computationally expensive



Frequent Itemset Generation

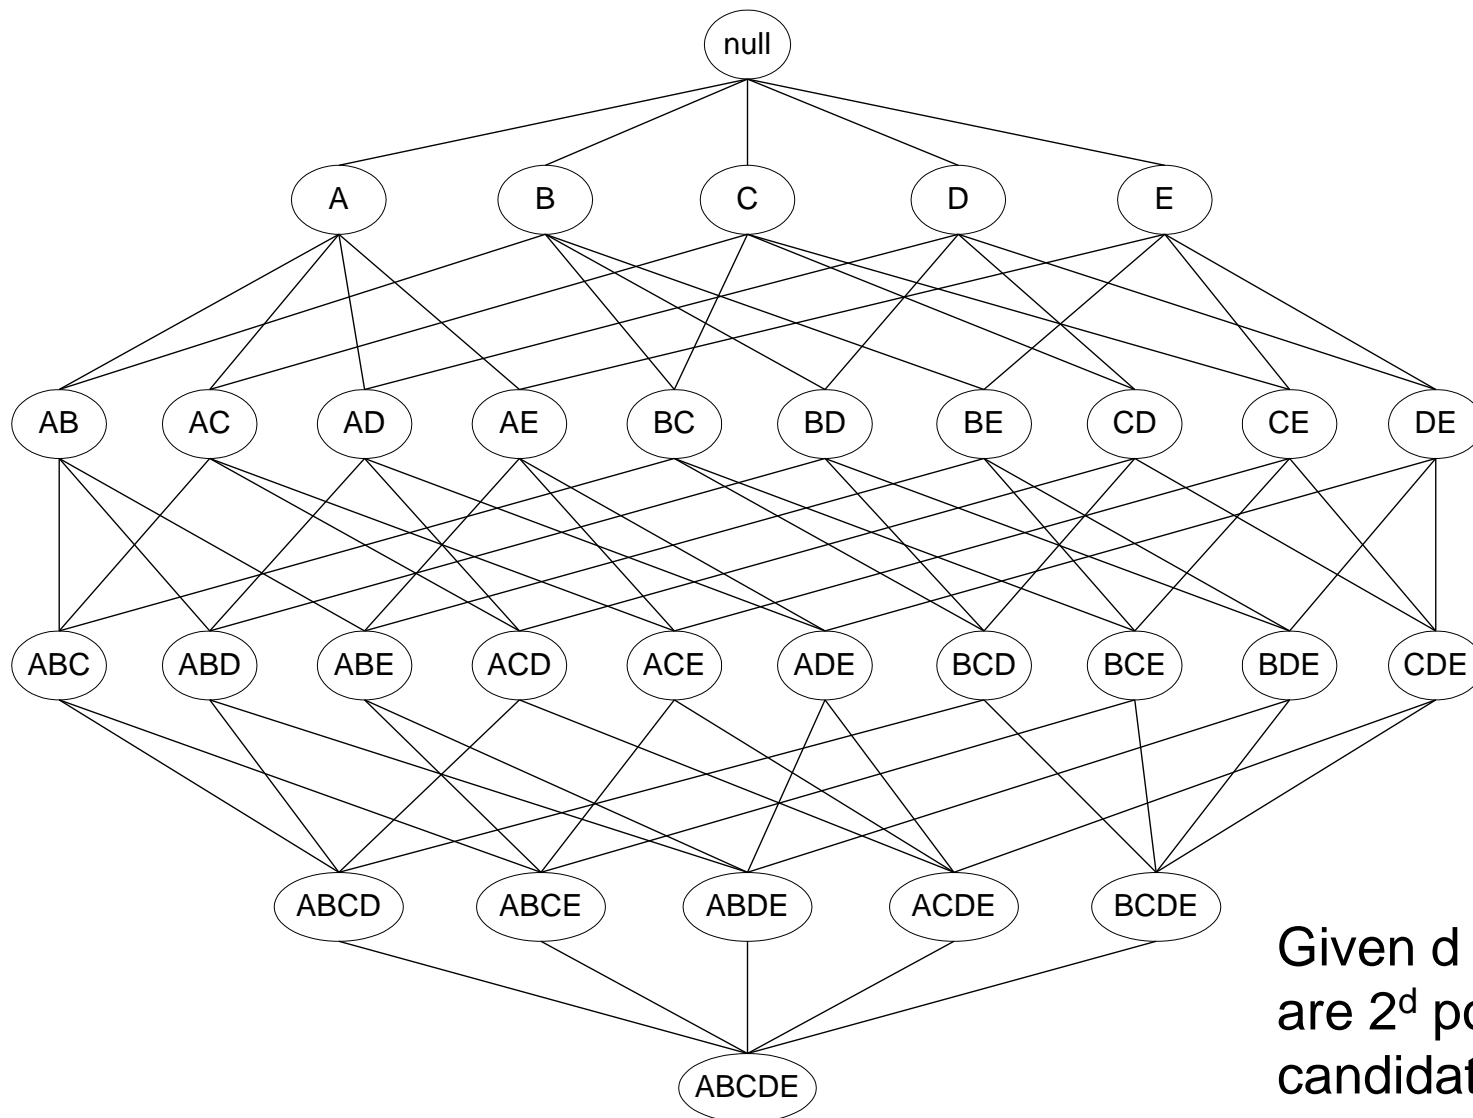


Given d items, there are 2^d possible candidate itemsets



Frequent Itemset Generation

- Brute-force approach:
 - Each itemset in the lattice is a **candidate** frequent itemset
 - Count the support of each candidate by scanning the database

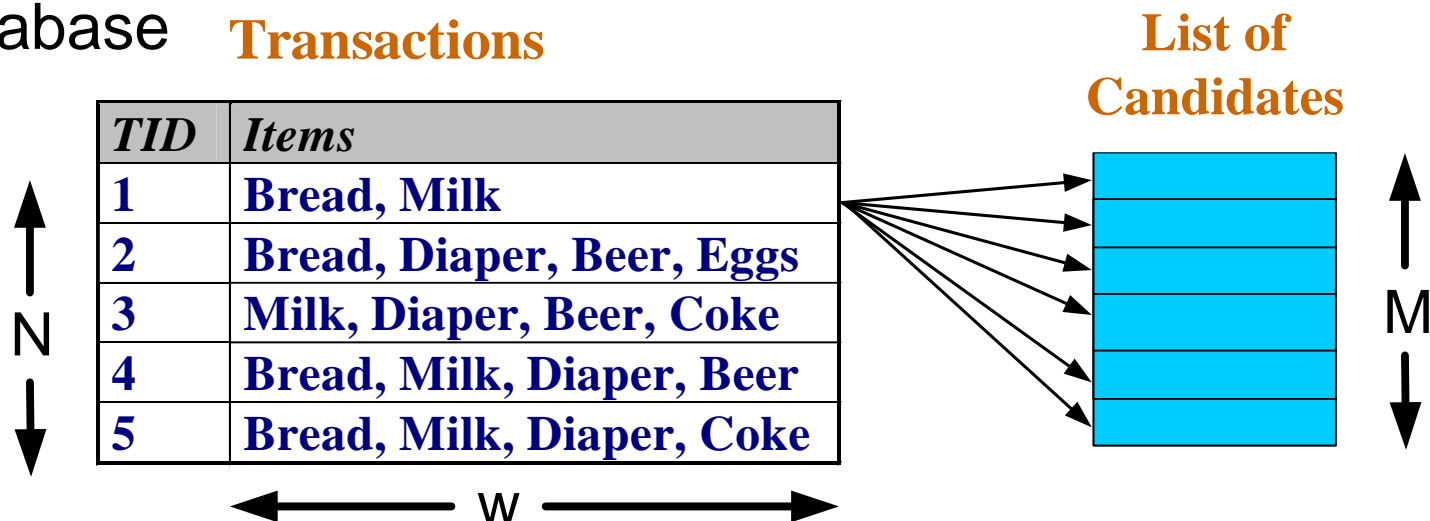

- Match each transaction against every candidate
- Complexity $\sim O(NMw) \Rightarrow$ **Expensive since $M = 2^d$!!!**



Reducing Number of Candidates

- **Apriori principle:**
 - If an itemset is frequent, then all of its subsets must also be frequent


- Apriori principle holds due to the following property of the support measure:

$$\forall X, Y : (X \subseteq Y) \Rightarrow s(X) \geq s(Y)$$

- Support of an itemset never exceeds the support of its subsets
- This is known as the **anti-monotone** property of support



Illustrating Apriori Principle

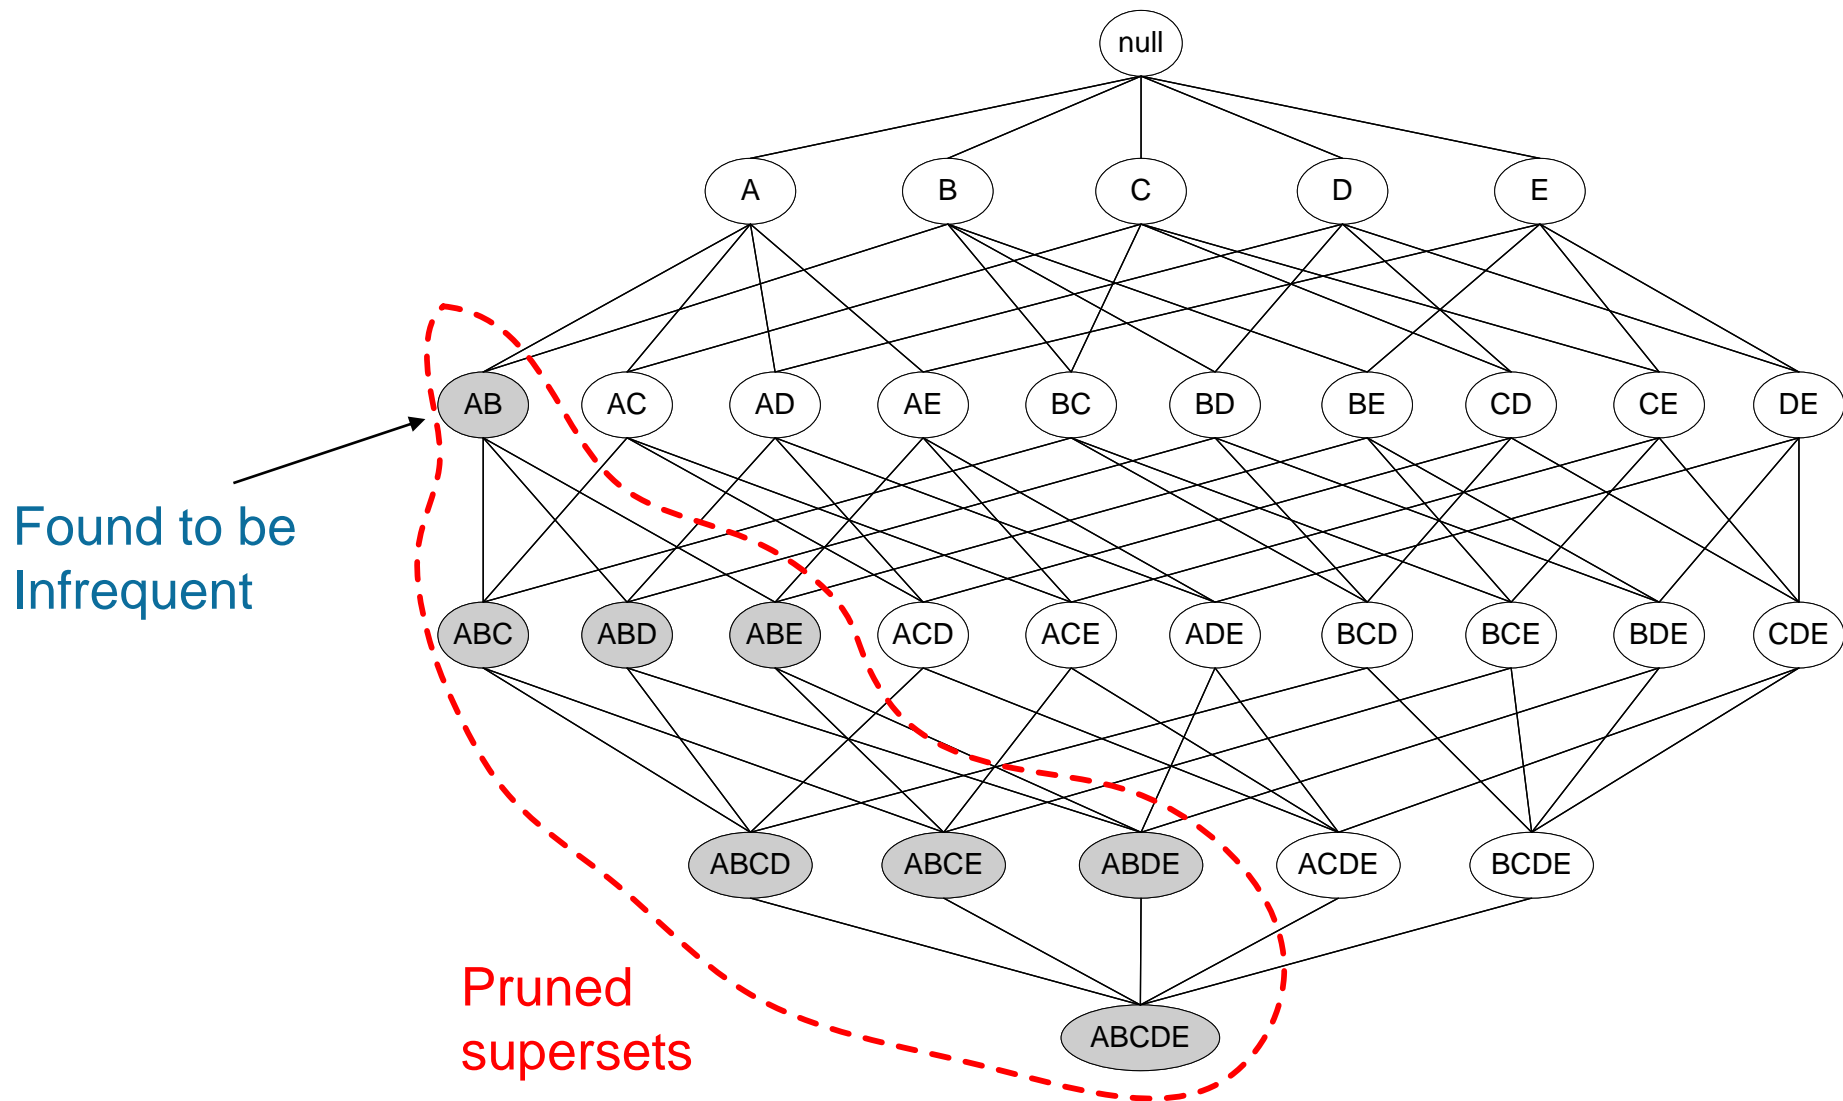



Illustrating Apriori Principle

<i>TID</i>	<i>Items</i>
1	Bread, Diaper, Milk
2	Beer, Bread, Diaper, Eggs
3	Beer, Coke, Diaper, Milk
4	Beer, Bread, Diaper, Milk
5	Bread, Coke, Diaper, Milk



Items (1-itemsets)

Item	Count
Bread	4
Coke	2
Milk	4
Beer	3
Diaper	5
Eggs	1

Minimum Support = 3

If every subset is considered,

$${}^6C_1 + {}^6C_2 + {}^6C_3 \\ 6 + 15 + 20 = 41$$

With support-based pruning,

$$6 + 6 + 4 = 16$$



Illustrating Apriori Principle

<i>TID</i>	<i>Items</i>
1	Bread, Diaper, Milk
2	Beer, Bread, Diaper, Eggs
3	Beer, Coke, Diaper, Milk
4	Beer, Bread, Diaper, Milk
5	Bread, Coke, Diaper, Milk



Items (1-itemsets)

Item	Count
Bread	4
Coke	2
Milk	4
Beer	3
Diaper	5
Eggs	1

Minimum Support = 3

If every subset is considered,

$${}^6C_1 + {}^6C_2 + {}^6C_3 \\ 6 + 15 + 20 = 41$$

With support-based pruning,

$$6 + 6 + 4 = 16$$



Illustrating Apriori Principle

Item	Count
Bread	4
Coke	2
Milk	4
Beer	3
Diaper	4
Eggs	1

Items (1-itemsets)



Itemset
{Bread,Milk}
{Bread, Beer }
{Bread,Diaper}
{Beer, Milk}
{Diaper, Milk}
{Beer,Diaper}

Pairs (2-itemsets)

(No need to generate candidates involving Coke or Eggs)

Minimum Support = 3

If every subset is considered,

$${}^6C_1 + {}^6C_2 + {}^6C_3 \\ 6 + 15 + 20 = 41$$

With support-based pruning,

$$6 + 6 + 4 = 16$$



Illustrating Apriori Principle

Item	Count
Bread	4
Coke	2
Milk	4
Beer	3
Diaper	4
Eggs	1

Items (1-itemsets)



Itemset	Count
{Bread,Milk}	3
{Beer, Bread}	2
{Bread,Diaper}	4
{Beer,Milk}	2
{Diaper,Milk}	4
{Beer,Diaper}	3

Pairs (2-itemsets)

(No need to generate candidates involving Coke or Eggs)

Minimum Support = 3

If every subset is considered,

$${}^6C_1 + {}^6C_2 + {}^6C_3 \\ 6 + 15 + 20 = 41$$

With support-based pruning,

$$6 + 6 + 4 = 16$$



Illustrating Apriori Principle

Item	Count
Bread	4
Coke	2
Milk	4
Beer	3
Diaper	4
Eggs	1

Items (1-itemsets)



Itemset	Count
{Bread,Milk}	3
{Bread,Beer}	2
{Bread,Diaper}	4
{Milk,Beer}	2
{Milk,Diaper}	4
{Beer,Diaper}	3

Pairs (2-itemsets)

(No need to generate candidates involving Coke or Eggs)

Minimum Support = 3

If every subset is considered,

$${}^6C_1 + {}^6C_2 + {}^6C_3 \\ 6 + 15 + 20 = 41$$

With support-based pruning,

$$6 + 6 + 4 = 16$$



Itemset
{ Beer, Diaper, Milk }
{ Beer,Bread,Diaper }
{Bread, Diaper, Milk }
{ Beer, Bread, Milk }

Triplets (3-itemsets)



Illustrating Apriori Principle

Item	Count
Bread	4
Coke	2
Milk	4
Beer	3
Diaper	4
Eggs	1

Items (1-itemsets)



Itemset	Count
{Bread,Milk}	3
{Bread,Beer}	2
{Bread,Diaper}	3
{Milk,Beer}	2
{Milk,Diaper}	3
{Beer,Diaper}	3

Pairs (2-itemsets)

(No need to generate candidates involving Coke or Eggs)



Triplets (3-itemsets)

Itemset	Count
{Beer,Diaper,Milk}	2
{Beer,Bread,Diaper}	2
{Bread,Diaper,Milk}	3
{Beer,Bread,Milk}	1

Minimum Support = 3

If every subset is considered,

$${}^6C_1 + {}^6C_2 + {}^6C_3$$

$$6 + 15 + 20 = 41$$

With support-based pruning,

$$6 + 6 + 4 = 16$$

$$6 + 6 + 1 = 13$$



Apriori Algorithm

- F_k : frequent k -itemsets
- L_k : candidate k -itemsets
- Algorithm
 - Let $k=1$
 - Generate $F_1 = \{\text{frequent 1-itemsets}\}$
 - Repeat until F_k is empty
 - **Candidate Generation:** Generate L_{k+1} from F_k
 - **Candidate Pruning:** Prune candidate itemsets in L_{k+1} containing subsets of length k that are infrequent
 - **Support Counting:** Count the support of each candidate in L_{k+1} by scanning the DB
 - **Candidate Elimination:** Eliminate candidates in L_{k+1} that are infrequent, leaving only those that are frequent $\Rightarrow F_{k+1}$



Rule Generation

- Given a frequent itemset L , find all non-empty subsets $f \subset L$ such that $f \rightarrow L - f$ satisfies the minimum confidence requirement
 - If $\{A,B,C,D\}$ is a frequent itemset, candidate rules:

$ABC \rightarrow D,$	$ABD \rightarrow C,$	$ACD \rightarrow B,$	$BCD \rightarrow A,$
$A \rightarrow BCD,$	$B \rightarrow ACD,$	$C \rightarrow ABD,$	$D \rightarrow ABC$
$AB \rightarrow CD,$	$AC \rightarrow BD,$	$AD \rightarrow BC,$	$BC \rightarrow AD,$
$BD \rightarrow AC,$	$CD \rightarrow AB,$		
- If $|L| = k$, then there are $2^k - 2$ candidate association rules (ignoring $L \rightarrow \emptyset$ and $\emptyset \rightarrow L$)




Rule Generation

- In general, confidence does not have an anti-monotone property
 - $c(ABC \rightarrow D)$ can be larger or smaller than $c(AB \rightarrow D)$
- But confidence of rules generated from the same itemset has an anti-monotone property
 - E.g., Suppose $\{A, B, C, D\}$ is a frequent 4-itemset:
$$c(ABC \rightarrow D) \geq c(AB \rightarrow CD) \geq c(A \rightarrow BCD)$$
 - Confidence is anti-monotone w.r.t. number of items on the right hand side of the rule



Rule Generation for Apriori Algorithm

Lattice of rules

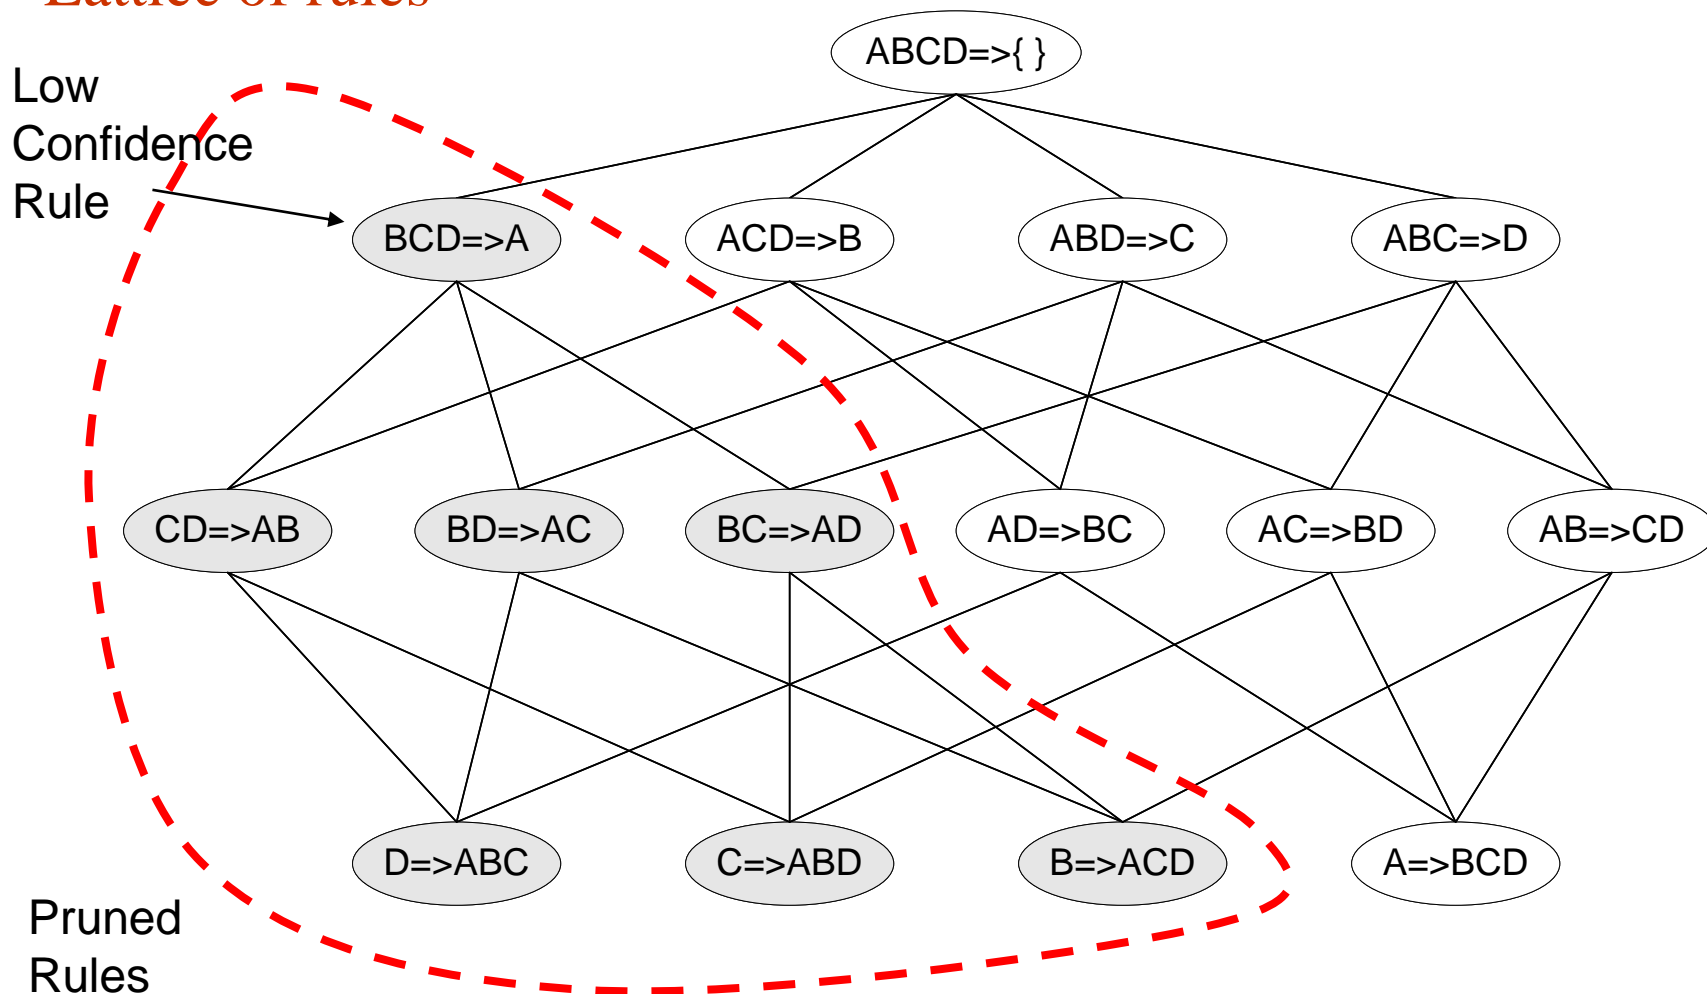




Factors Affecting Complexity of Apriori

- Choice of minimum support threshold
 - Lowering support threshold results in more frequent itemsets
 - This may increase number of candidates and max length of frequent itemsets
- Dimensionality (number of items) of the data set
 - More space is needed to store support count of each item
 - If number of frequent items also increases, both computation and I/O costs may also increase
- Size of database
 - Since Apriori makes multiple passes, run time of algorithm may increase with number of transactions
- Average transaction width
 - Transaction width increases with denser data sets
 - This may increase max length of frequent itemsets and traversals of hash tree (number of subsets in a transaction increases with its width)



Maximal Frequent Itemset

An itemset is maximal frequent if it is frequent and none of its immediate supersets is frequent

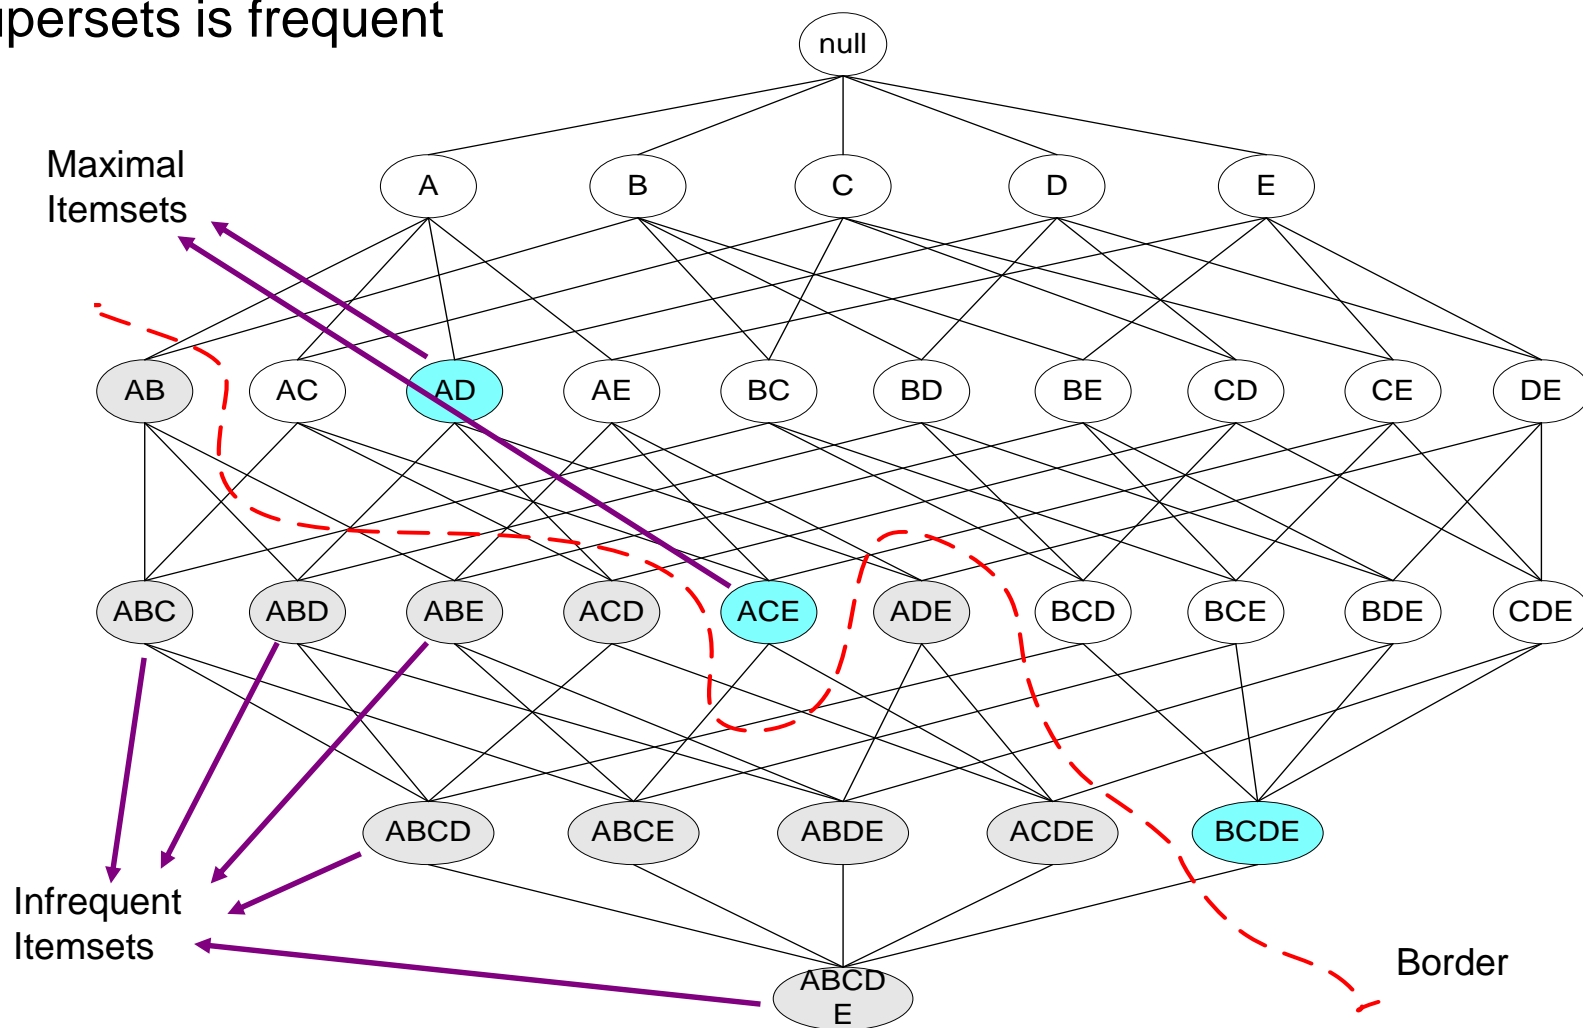



An illustrative example

		Items									
Transactions		A	B	C	D	E	F	G	H	I	J
	1										
	2										
	3										
	4										
	5										
	6										
	7										
	8										
	9										
	10										

Support threshold (by count) : 5
Frequent itemsets: {F}



An illustrative example

Items

	A	B	C	D	E	F	G	H	I	J
1										
2										
3										
4										
5										
6										
7										
8										
9										
10										

Support threshold (by count) : 5

Frequent itemsets: {F}

Support threshold (by count): 4

Frequent itemsets: {E}, {F}, {E,F}, {J}



An illustrative example

Items

	A	B	C	D	E	F	G	H	I	J
1										
2										
3										
4										
5										
6										
7										
8										
9										
10										

Support threshold (by count) : 5

Frequent itemsets: {F}

Support threshold (by count): 4

Frequent itemsets: {E}, {F}, {E,F}, {J}

Support threshold (by count): 3

Frequent itemsets:

All subsets of {C,D,E,F} + {J}



An illustrative example

Items

	A	B	C	D	E	F	G	H	I	J
1										
2										
3										
4										
5										
6										
7										
8										
9										
10										

Support threshold (by count) : 5

Frequent itemsets: {F}

Maximal itemsets: ?

Support threshold (by count): 4

Frequent itemsets: {E}, {F}, {E,F}, {J}

Maximal itemsets: ?

Support threshold (by count): 3

Frequent itemsets:

All subsets of {C,D,E,F} + {J}

Maximal itemsets: ?



An illustrative example

Items

	A	B	C	D	E	F	G	H	I	J
1										
2										
3										
4										
5										
6										
7										
8										
9										
10										

Support threshold (by count) : 5

Frequent itemsets: {F}

Maximal itemsets: {F}

Support threshold (by count): 4

Frequent itemsets: {E}, {F}, {E,F}, {J}

Maximal itemsets: {E,F}, {J}

Support threshold (by count): 3

Frequent itemsets:

All subsets of {C,D,E,F} + {J}

Maximal itemsets: {C,D,E,F}, {J}



An illustrative example

		Items									
Transactions		A	B	C	D	E	F	G	H	I	J
	1										
	2										
	3										
	4										
	5										
	6										
	7										
	8										
	9										
	10										

Support threshold (by count) : 5

Frequent itemsets: {F}

Maximal itemsets: {F}

Support threshold (by count): 4

Frequent itemsets: {E}, {F}, {E,F}, {J}

Maximal itemsets: {E,F}, {J}

Support threshold (by count): 3

Frequent itemsets:

All subsets of {C,D,E,F} + {J}

Maximal itemsets: ?



An illustrative example

Items

	A	B	C	D	E	F	G	H	I	J
1										
2										
3										
4										
5										
6										
7										
8										
9										
10										

Support threshold (by count) : 5

Frequent itemsets: {F}

Maximal itemsets: {F}

Support threshold (by count): 4

Frequent itemsets: {E}, {F}, {E,F}, {J}

Maximal itemsets: {E,F}, {J}

Support threshold (by count): 3

Frequent itemsets:

All subsets of {C,D,E,F} + {J}

Maximal itemsets:

{C,D,E,F}, {J}



Another illustrative example

		Items									
Transactions		A	B	C	D	E	F	G	H	I	J
	1										
	2										
	3										
	4										
	5										
	6										
	7										
	8										
	9										
	10										

Support threshold (by count) : 5

Maximal itemsets: {A}, {B}, {C}

Support threshold (by count): 4

Maximal itemsets: {A,B}, {A,C},{B,C}

Support threshold (by count): 3

Maximal itemsets: {A,B,C}



Closed Itemset

- An itemset X is closed if none of its immediate supersets has the same support as the itemset X .
- X is not closed if at least one of its immediate supersets has support count as X .

TID	Items
1	{A,B}
2	{B,C,D}
3	{A,B,C,D}
4	{A,B,D}
5	{A,B,C,D}


Itemset	Support
{A}	4
{B}	5
{C}	3
{D}	4
{A,B}	4
{A,C}	2
{A,D}	3
{B,C}	3
{B,D}	4
{C,D}	3

Itemset	Support
{A,B,C}	2
{A,B,D}	3
{A,C,D}	2
{B,C,D}	2
{A,B,C,D}	2




Maximal vs Closed Itemsets

TID	Items
1	ABC
2	ABCD
3	BCE
4	ACDE
5	DE

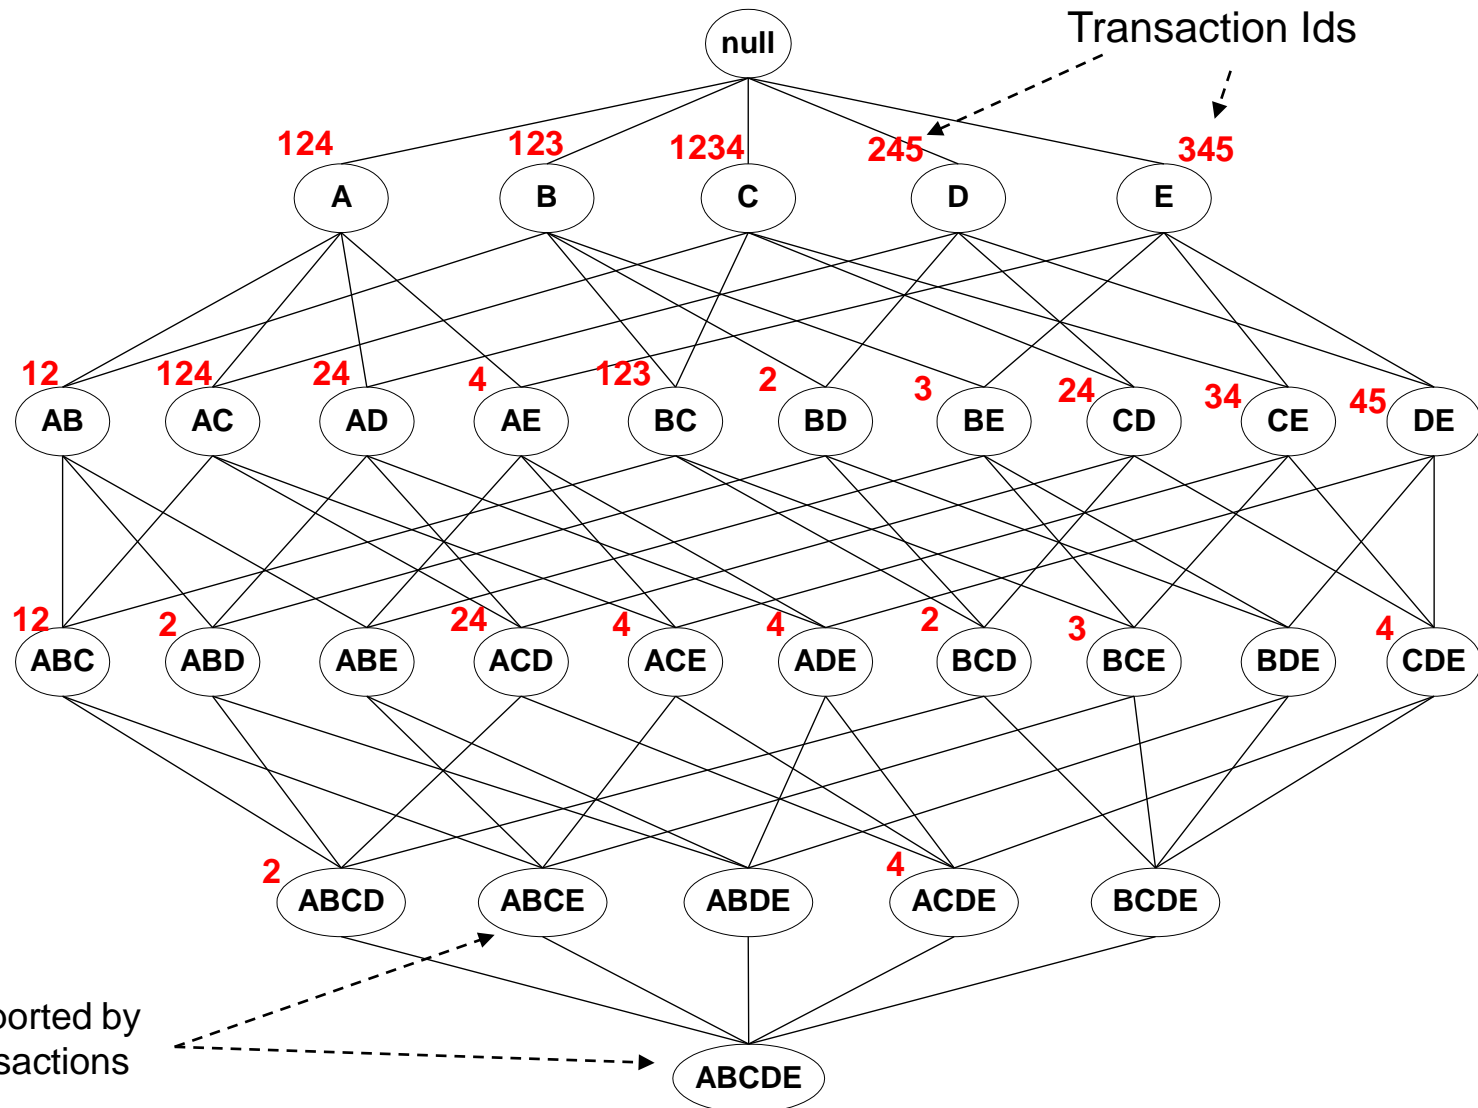



Maximal vs Closed Frequent Itemsets

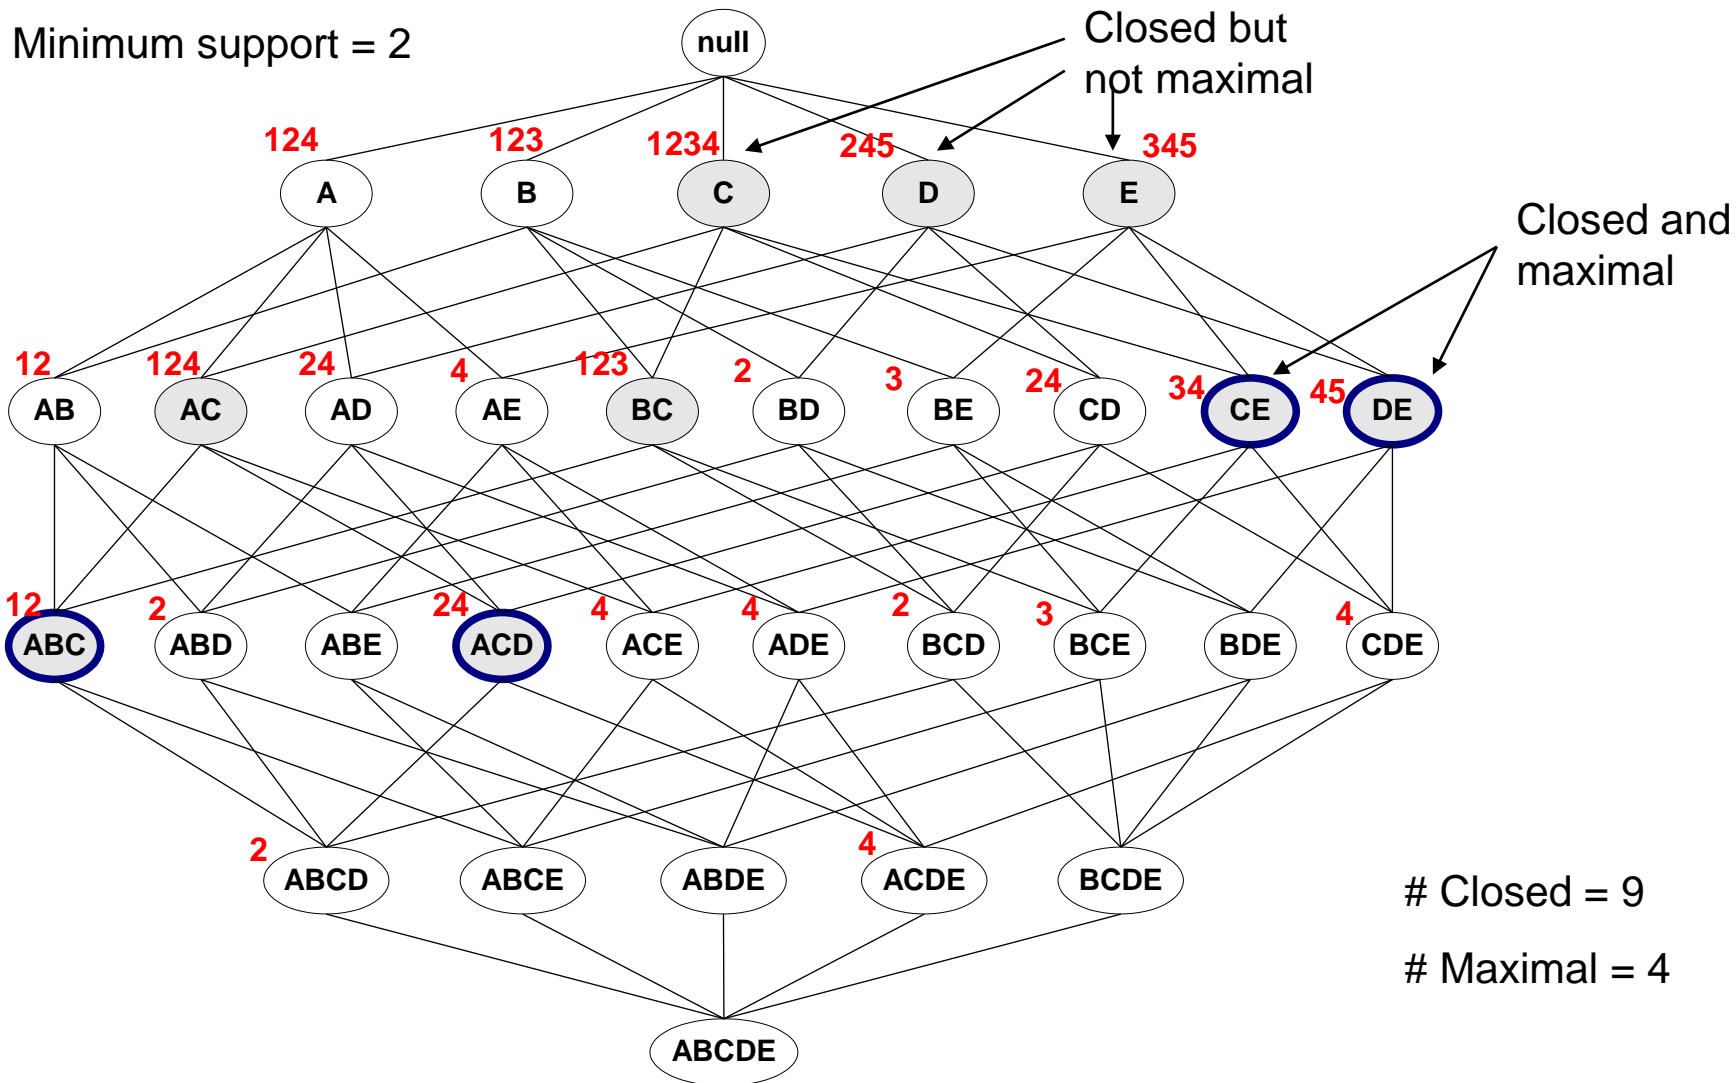



Example 1

Transactions	Items									
	A	B	C	D	E	F	G	H	I	J
	1									
	2									
	3									
	4									
	5									
	6									
	7									
	8									
	9									
	10									

Itemsets	Support (counts)	Closed itemsets
{C}	3	
{D}	2	
{C,D}	2	



Example 1

		Items									
Transactions		A	B	C	D	E	F	G	H	I	J
	1										
	2										
	3										
	4										
	5										
	6										
	7										
	8										
	9										
	10										

Itemsets	Support (counts)	Closed itemsets
{C}	3	✓
{D}	2	
{C,D}	2	✓



Example 2

Transactions	Items									
	A	B	C	D	E	F	G	H	I	J
	1									
	2									
	3									
	4									
	5									
	6									
	7									
	8									
	9									
	10									

Itemsets	Support (counts)	Closed itemsets
{C}	3	
{D}	2	
{E}	2	
{C,D}	2	
{C,E}	2	
{D,E}	2	
{C,D,E}	2	



Example 2

Transactions	Items									
	A	B	C	D	E	F	G	H	I	J
	1									
	2									
	3									
	4									
	5									
	6									
	7									
	8									
	9									
	10									

Itemsets	Support (counts)	Closed itemsets
{C}	3	✓
{D}	2	
{E}	2	
{C,D}	2	
{C,E}	2	
{D,E}	2	
{C,D,E}	2	✓



Example 3

		Items									
Transactions		A	B	C	D	E	F	G	H	I	J
	1										
	2										
	3										
	4										
	5										
	6										
	7										
	8										
	9										
	10										

Closed itemsets:
 $\{C,D,E,F\}$, $\{C,F\}$




Example 4

		Items									
Transactions		A	B	C	D	E	F	G	H	I	J
	1										
	2										
	3										
	4										
	5										
	6										
	7										
	8										
	9										
	10										

Closed itemsets:
 $\{C,D,E,F\}$, $\{C\}$, $\{F\}$






Maximal vs Closed Itemsets

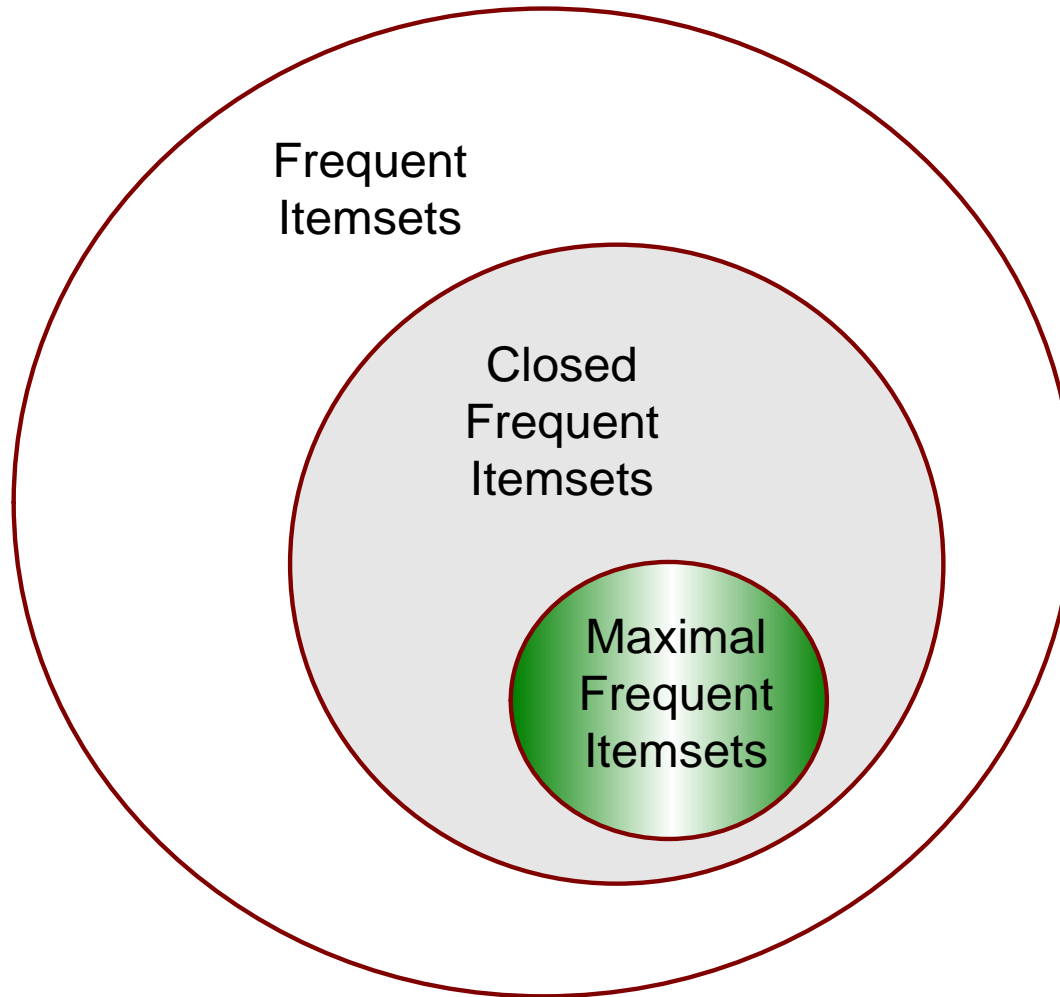



Example Question

- Given the following transaction data sets (dark cells indicate presence of an item in a transaction) and a support threshold of 20%, answer the following questions

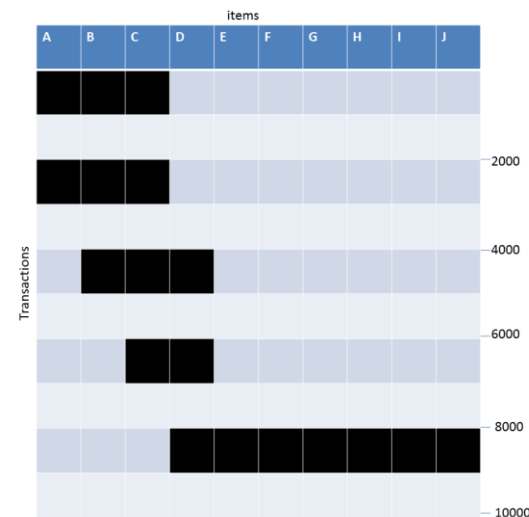
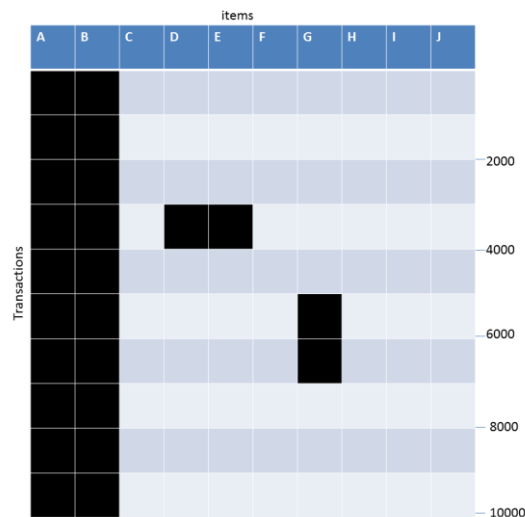
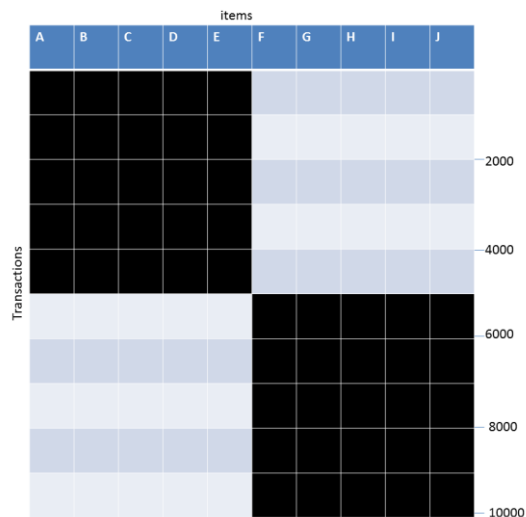


- What is the number of frequent itemsets for each dataset? Which dataset will produce the most number of frequent itemsets?



Example Question

- Given the following transaction data sets (dark cells indicate presence of an item in a transaction) and a support threshold of 20%, answer the following questions

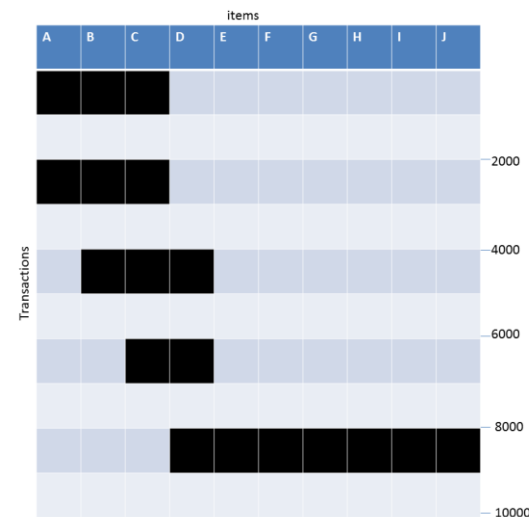
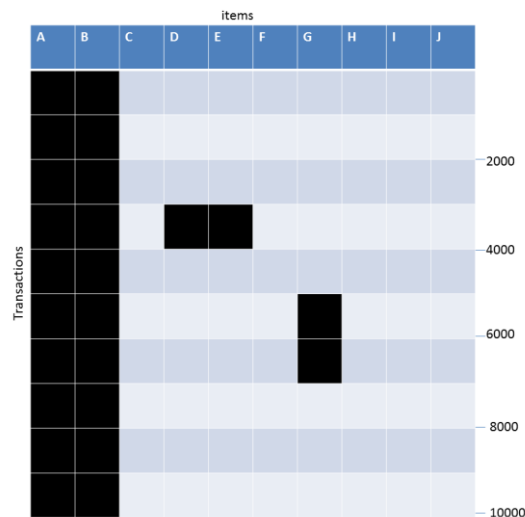
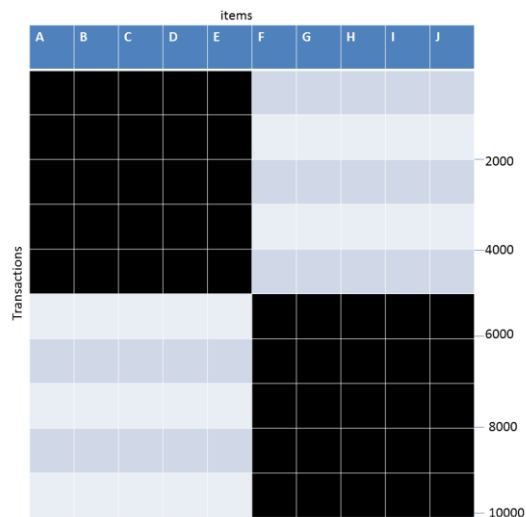


- Which dataset will produce the longest frequent itemset?
- Which dataset will produce frequent itemsets with highest maximum support?



Example Question

- Given the following transaction data sets (dark cells indicate presence of an item in a transaction) and a support threshold of 20%, answer the following questions

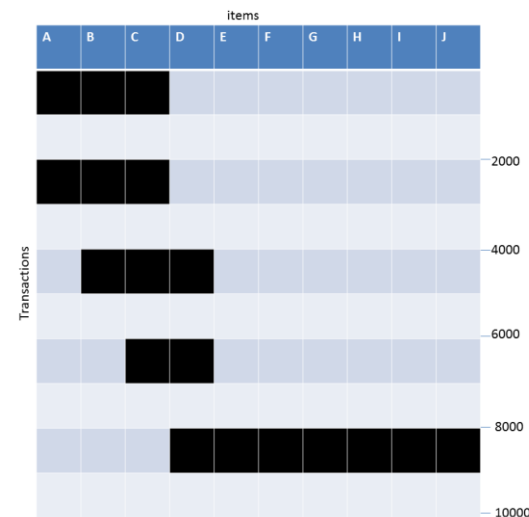
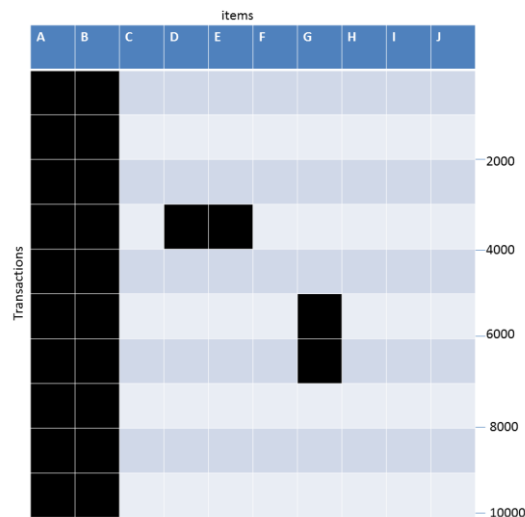
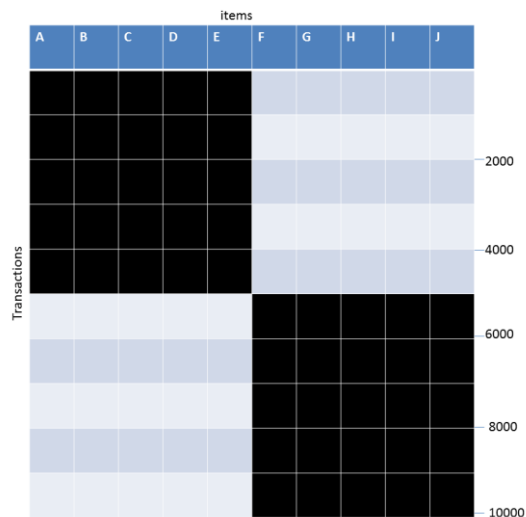


- d. Which dataset will produce frequent itemsets containing items with widely varying support levels (i.e., itemsets containing items with mixed support, ranging from 20% to more than 70%)?



Example Question

- Given the following transaction data sets (dark cells indicate presence of an item in a transaction) and a support threshold of 20%, answer the following questions

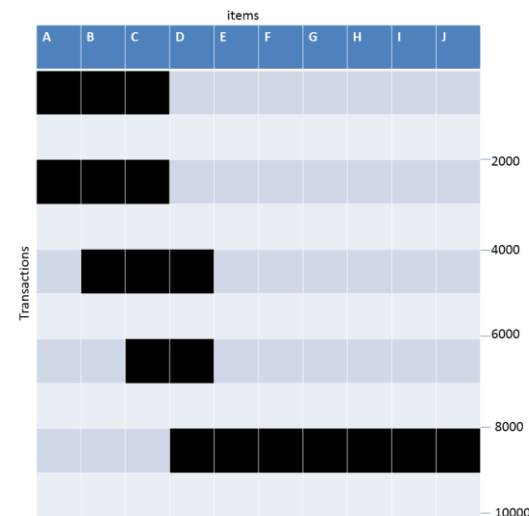
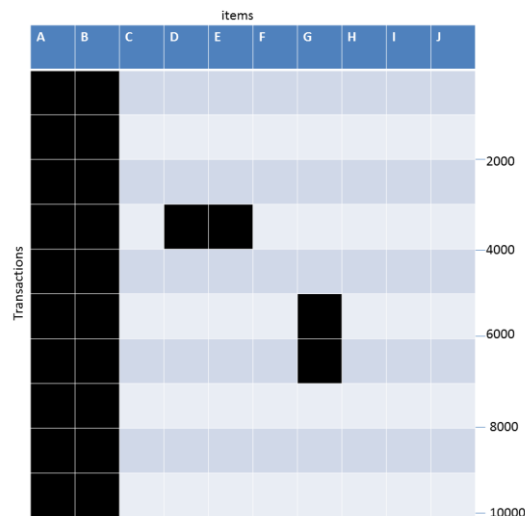
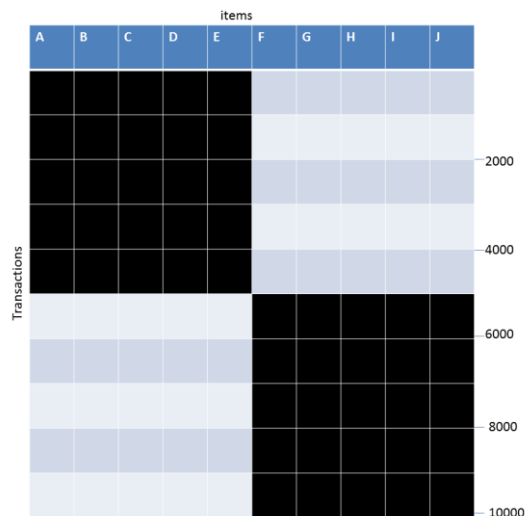


- e. What is the number of maximal frequent itemsets for each dataset? Which dataset will produce the most number of maximal frequent itemsets?



Example Question

- Given the following transaction data sets (dark cells indicate presence of an item in a transaction) and a support threshold of 20%, answer the following questions

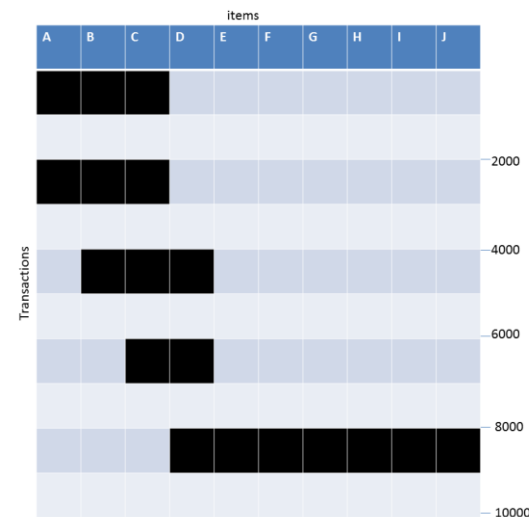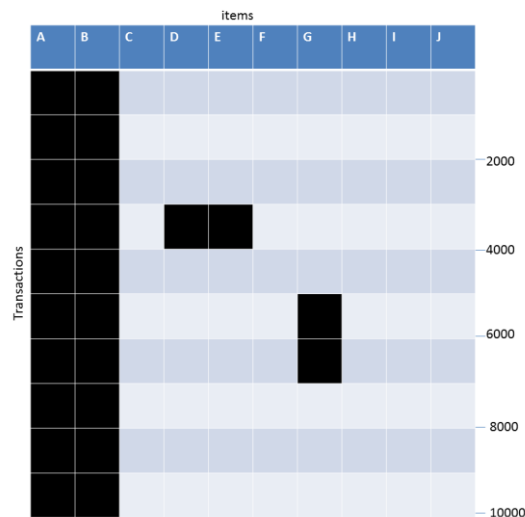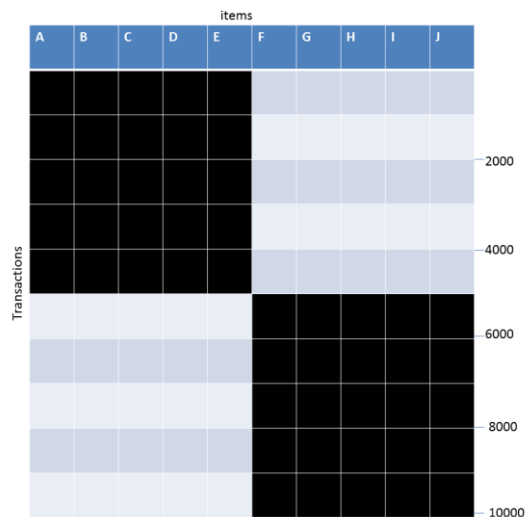

- e. What is the number of closed frequent itemsets for each dataset? Which dataset will produce the most number of closed frequent itemsets?



Pattern Evaluation

- Association rule algorithms can produce large number of rules
- Interestingness measures can be used to prune/rank the patterns
 - In the original formulation, support & confidence are the only measures used



Computing Interestingness Measure

- Given $X \rightarrow Y$ or $\{X, Y\}$, information needed to compute interestingness can be obtained from a contingency table

Contingency table

	Y	\overline{Y}	
X	f_{11}	f_{10}	f_{1+}
\overline{X}	f_{01}	f_{00}	f_{0+}
	f_{+1}	f_{+0}	N

f_{11} : support of X and Y

f_{10} : support of \underline{X} and \overline{Y}

f_{01} : support of \overline{X} and \underline{Y}

f_{00} : support of \overline{X} and \overline{Y}

Used to define various measures

- ◆ support, confidence, Gini, entropy, etc.



Drawback of Confidence

Custo mers	Tea	Coffee	...
C1	0	1	...
C2	1	0	...
C3	1	1	...
C4	1	0	...
...			

	Coffee	<u>Coffee</u>	
Tea	15	5	20
<u>Tea</u>	75	5	80
	90	10	100

Association Rule: Tea \rightarrow Coffee

Confidence $\cong P(\text{Coffee}|\text{Tea}) = 15/20 = 0.75$

Confidence $> 50\%$, meaning people who drink tea are more likely to drink coffee than not drink coffee

So rule seems reasonable



Drawback of Confidence

	Coffee	<u>Coffee</u>	
Tea	15	5	20
<u>Tea</u>	75	5	80
	90	10	100

Association Rule: Tea \rightarrow Coffee

$$\text{Confidence} = P(\text{Coffee}|\text{Tea}) = 15/20 = 0.75$$

but $P(\text{Coffee}) = 0.9$, which means knowing that a person drinks tea reduces the probability that the person drinks coffee!

$$\Rightarrow \text{Note that } P(\text{Coffee}|\overline{\text{Tea}}) = 75/80 = 0.9375$$



Measure for Association Rules

- So, what kind of rules do we really want?
 - Confidence($X \rightarrow Y$) should be sufficiently high
 - To ensure that people who buy X will more likely buy Y than not buy Y
 - Confidence($X \rightarrow Y$) $>$ support(Y)
 - Otherwise, rule will be misleading because having item X actually reduces the chance of having item Y in the same transaction
 - Is there any measure that capture this constraint?
 - + Answer: Yes. There are many of them.



Statistical Independence

- The criterion
 $\text{confidence}(X \rightarrow Y) = \text{support}(Y)$

is equivalent to:

- $P(Y|X) = P(Y)$
- $P(X, Y) = P(X) \times P(Y)$

If $P(X, Y) > P(X) \times P(Y)$: X & Y are positively correlated

If $P(X, Y) < P(X) \times P(Y)$: X & Y are negatively correlated



Measures that take into account statistical dependence

$$\textit{Lift} = \frac{P(Y | X)}{P(Y)}$$

$$\textit{Interest} = \frac{P(X, Y)}{P(X)P(Y)}$$

lift is used for rules while
interest is used for itemsets

$$PS = P(X, Y) - P(X)P(Y)$$

$$\phi - \textit{coefficient} = \frac{P(X, Y) - P(X)P(Y)}{\sqrt{P(X)[1 - P(X)]P(Y)[1 - P(Y)]}}$$



Example: Lift/Interest

	Coffee	<u>Coffee</u>	
Tea	15	5	20
<u>Tea</u>	75	5	80
	90	10	100

Association Rule: Tea \rightarrow Coffee

Confidence = $P(\text{Coffee}|\text{Tea}) = 0.75$

but $P(\text{Coffee}) = 0.9$

\Rightarrow Lift = $0.75/0.9 = 0.8333$ (< 1 , therefore is negatively associated)

So, is it enough to use confidence/lift for pruning?



Lift or Interest

	Y	\bar{Y}	
X	10	0	10
\bar{X}	0	90	90
	10	90	100

$$Lift = \frac{0.1}{(0.1)(0.1)} = 10$$

	Y	\bar{Y}	
X	90	0	90
\bar{X}	0	10	10
	90	10	100

$$Lift = \frac{0.9}{(0.9)(0.9)} = 1.11$$

Statistical independence:

If $P(X,Y)=P(X)P(Y) \Rightarrow Lift = 1$




There are lots of measures proposed in the literature

#	Measure	Formula
1	ϕ -coefficient	$\frac{P(A,B) - P(A)P(B)}{\sqrt{P(A)P(B)(1-P(A))(1-P(B))}}$
2	Goodman-Kruskal's (λ)	$\frac{\sum_j \max_k P(A_j, B_k) + \sum_k \max_j P(A_j, B_k) - \max_j P(A_j) - \max_k P(B_k)}{2 - \max_j P(A_j) - \max_k P(B_k)}$
3	Odds ratio (α)	$\frac{P(A,B)P(\bar{A},\bar{B})}{P(A,\bar{B})P(\bar{A},B)}$
4	Yule's Q	$\frac{P(A,B)P(\bar{A}\bar{B}) - P(A,\bar{B})P(\bar{A},B)}{P(A,B)P(\bar{A}\bar{B}) + P(A,\bar{B})P(\bar{A},B)} = \frac{\alpha-1}{\alpha+1}$
5	Yule's Y	$\frac{\sqrt{P(A,B)P(\bar{A}\bar{B})} - \sqrt{P(A,\bar{B})P(\bar{A},B)}}{\sqrt{P(A,B)P(\bar{A}\bar{B})} + \sqrt{P(A,\bar{B})P(\bar{A},B)}} = \frac{\sqrt{\alpha}-1}{\sqrt{\alpha}+1}$
6	Kappa (κ)	$\frac{P(A,B) + P(\bar{A},\bar{B}) - P(A)P(B) - P(\bar{A})P(\bar{B})}{1 - P(A)P(B) - P(\bar{A})P(\bar{B})}$
7	Mutual Information (M)	$\frac{\sum_i \sum_j P(A_i, B_j) \log \frac{P(A_i, B_j)}{P(A_i)P(B_j)}}{\min(-\sum_i P(A_i) \log P(A_i), -\sum_j P(B_j) \log P(B_j))}$
8	J-Measure (J)	$\max \left(P(A, B) \log \left(\frac{P(B A)}{P(B)} \right) + P(\bar{A}\bar{B}) \log \left(\frac{P(\bar{B} \bar{A})}{P(\bar{B})} \right), \right. \\ \left. P(A, B) \log \left(\frac{P(A B)}{P(A)} \right) + P(\bar{A}\bar{B}) \log \left(\frac{P(\bar{A} \bar{B})}{P(\bar{A})} \right) \right)$
9	Gini index (G)	$\max \left(P(A)[P(B A)^2 + P(\bar{B} A)^2] + P(\bar{A})[P(B \bar{A})^2 + P(\bar{B} \bar{A})^2] \right. \\ \left. - P(B)^2 - P(\bar{B})^2, \right. \\ \left. P(B)[P(A B)^2 + P(\bar{A} B)^2] + P(\bar{B})[P(A \bar{B})^2 + P(\bar{A} \bar{B})^2] \right. \\ \left. - P(A)^2 - P(\bar{A})^2 \right)$
10	Support (s)	$P(A, B)$
11	Confidence (c)	$\max(P(B A), P(A B))$
12	Laplace (L)	$\max \left(\frac{NP(A,B)+1}{NP(A)+2}, \frac{NP(A,B)+1}{NP(B)+2} \right)$
13	Conviction (V)	$\max \left(\frac{P(A)P(\bar{B})}{P(\bar{A}B)}, \frac{P(B)P(\bar{A})}{P(\bar{B}A)} \right)$
14	Interest (I)	$\frac{P(A,B)}{P(A)P(B)}$
15	cosine (IS)	$\frac{P(A,B)}{\sqrt{P(A)P(B)}}$
16	Piatetsky-Shapiro's (PS)	$P(A, B) - P(A)P(B)$
17	Certainty factor (F)	$\max \left(\frac{P(B A) - P(B)}{1 - P(B)}, \frac{P(A B) - P(A)}{1 - P(A)} \right)$
18	Added Value (AV)	$\max(P(B A) - P(B), P(A B) - P(A))$
19	Collective strength (S)	$\frac{P(A,B) + P(\bar{A}\bar{B})}{P(A)P(B) + P(\bar{A})P(\bar{B})} \times \frac{1 - P(A)P(B) - P(\bar{A})P(\bar{B})}{1 - P(A,B) - P(\bar{A}\bar{B})}$
20	Jaccard (ζ)	$\frac{P(A,B)}{P(A) + P(B) - P(A,B)}$
21	Klosgen (K)	$\sqrt{P(A, B)} \max(P(B A) - P(B), P(A B) - P(A))$



Property under Variable Permutation

	B	$\overline{\mathbf{B}}$
A	p	q
$\overline{\mathbf{A}}$	r	s



	A	$\overline{\mathbf{A}}$
B	p	r
$\overline{\mathbf{B}}$	q	s

Does $M(A,B) = M(B,A)$?

Symmetric measures:

- ◆ support, lift, collective strength, cosine, Jaccard, etc

Asymmetric measures:

- ◆ confidence, conviction, Laplace, J-measure, etc



Property under Row/Column Scaling

Grade-Gender Example (Mosteller, 1968):

	Female	Male	
High	2	3	5
Low	1	4	5
	3	7	10

	Female	Male	
High	4	30	34
Low	2	40	42
	6	70	76



2x



10x

Mosteller:

Underlying association should be independent of the relative number of male and female students in the samples



Property under Inversion Operation

	A	B	C	D	E	F
Transaction 1 →	1	0	0	1	0	0
▪	0	0	1	1	1	0
▪	0	0	1	1	1	0
▪	0	0	1	1	1	0
▪	0	1	1	0	1	1
▪	0	0	1	1	1	0
▪	0	0	1	1	1	0
▪	0	0	1	1	1	0
▪	0	0	1	1	1	0
Transaction N →	1	0	0	1	0	0

(a) (b) (c)



Example: ϕ -Coefficient

- ϕ -coefficient is analogous to correlation coefficient for continuous variables

	Y	\bar{Y}	
X	60	10	70
\bar{X}	10	20	30
	70	30	100

	Y	\bar{Y}	
X	20	10	30
\bar{X}	10	60	70
	30	70	100

$$\phi = \frac{0.6 - 0.7 \times 0.7}{\sqrt{0.7 \times 0.3 \times 0.7 \times 0.3}} = 0.5238$$


$$\phi = \frac{0.2 - 0.3 \times 0.3}{\sqrt{0.7 \times 0.3 \times 0.7 \times 0.3}} = 0.5238$$

ϕ Coefficient is the same for both tables



Property under Null Addition

	B	\bar{B}
A	p	q
\bar{A}	r	s



	B	\bar{B}
A	p	q
\bar{A}	r	s + k

Invariant measures:

- ◆ support, cosine, Jaccard, etc

Non-invariant measures:

- ◆ correlation, Gini, mutual information, odds ratio, etc



Different Measures have Different Properties

Symbol	Measure	Inversion	Null Addition	Scaling
ϕ	ϕ -coefficient	Yes	No	No
α	odds ratio	Yes	No	Yes
κ	Cohen's	Yes	No	No
I	Interest	No	No	No
IS	Cosine	No	Yes	No
PS	Piatetsky-Shapiro's	Yes	No	No
S	Collective strength	Yes	No	No
ζ	Jaccard	No	Yes	No
h	All-confidence	No	No	No
s	Support	No	No	No



References

- P.-N. Tan, M. Steinbach, V. Kumar: Introduction to data mining, Second Edition, <https://www-users.cs.umn.edu/~kumar001/dmbook/index.php>