


DMA (producer): write frame $\rightarrow$ slot[i], bump producer_idx

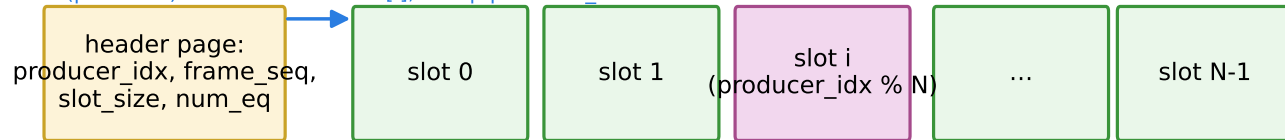

application: poll() $\rightarrow$ read slot[i] directly (no kernel copy)

read producer_idx (coherent, visible directly)