


Chapter 2

Application Layer

Yaxiong Xie

Department of Computer Science and Engineering
University at Buffalo, SUNY

Adapted from the slides of the book's authors

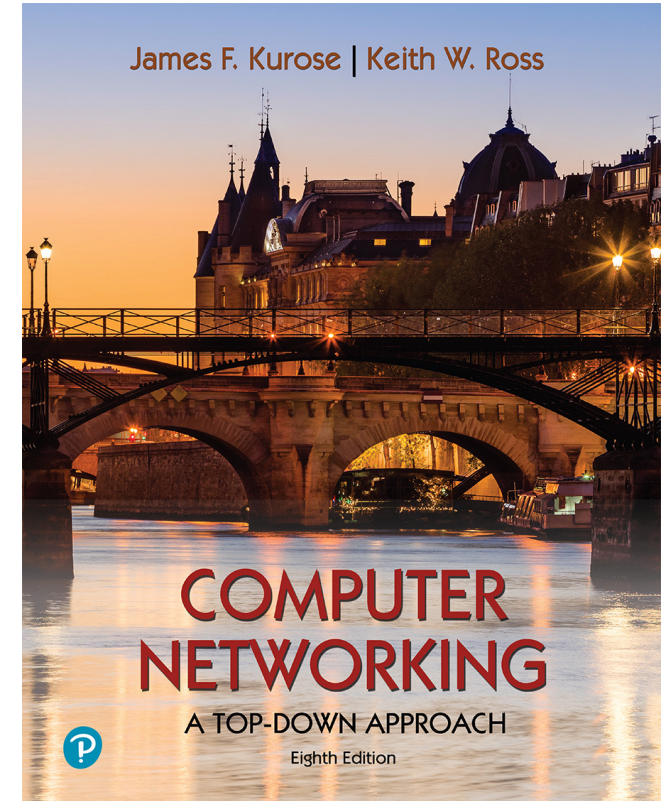

*Computer Networking: A
Top-Down Approach*

8th edition
Jim Kurose, Keith Ross
Pearson, 2020

Socket programming with TCP

Client must contact server

- server process must first be running
- server must have created socket (door) that welcomes client's contact

Client contacts server by:


- Creating TCP socket, specifying IP address, port number of server process
- *when client creates socket*: client TCP establishes connection to server TCP

- when contacted by client, *server TCP creates a new socket* for server process to communicate with that particular client
 - allows server to talk with multiple clients
 - *source* port numbers used to distinguish clients (more in Chap 3)

Application viewpoint


TCP provides reliable, in-order byte-stream transfer ("pipe") between client and server processes

Client/server socket interaction: TCP



server (running on `hostid`)

client

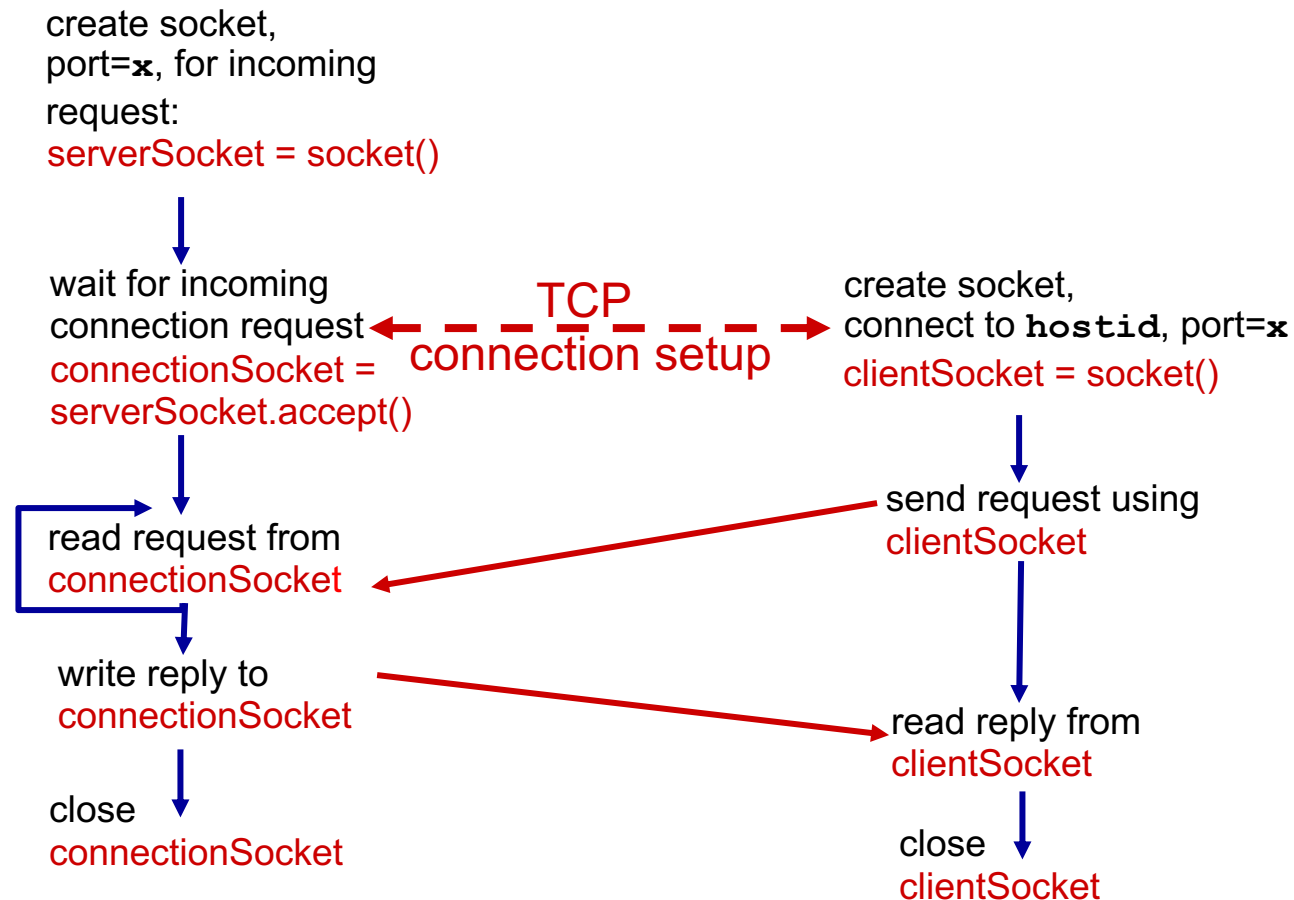

Example app: TCP client

Python TCPClient

create TCP socket for server,
remote port 12000

No need to attach server name/IP , port
Info anymore

```
from socket import *
serverName = 'servername'
serverPort = 12000
clientSocket = socket(AF_INET, SOCK_STREAM)
clientSocket.connect((serverName, serverPort))
sentence = raw_input('Input lowercase sentence:')
clientSocket.send(sentence.encode())
modifiedSentence = clientSocket.recv(1024)
print ('From Server:', modifiedSentence.decode())
clientSocket.close()
```

TCP socket type



SOCK_STREAM



Example app: TCP server

Python TCPServer

	from socket import *
	serverPort = 12000
create TCP welcoming socket →	serverSocket = socket(AF_INET, <u>SOCK_STREAM</u>)
	serverSocket.bind(('', serverPort))
server begins listening for incoming TCP requests →	serverSocket.listen(1)
	print 'The server is ready to receive'
loop forever →	while True:
server waits on accept() for incoming requests, new socket created on demand →	connectionSocket, addr = serverSocket.accept()
read bytes from socket (but not address as in UDP) →	sentence = connectionSocket.recv(1024).decode() capitalizedSentence = sentence.upper() connectionSocket.send(capitalizedSentence.encode())
close connection to this client (but <i>not</i> welcoming socket) →	connectionSocket.close()

(Distinct) Feature of TCP Sockets

- TCP connection identified by 4-tuple:
 - source IP address
 - source port number
 - dest IP address
 - dest port number
- Server has two types of sockets:
 - When client knocks on serverSocket's "door," server creates **a new ConnectionSocket and completes TCP connection**
- Web servers have different sockets for each connecting client
 - non-persistent HTTP will have different socket for each request

Securing TCP

Vanilla TCP & UDP sockets:

- no encryption
- cleartext passwords sent into socket traverse Internet in cleartext (!)

Transport Layer Security (TLS)

- provides encrypted TCP connections
- data integrity
- end-point authentication

TSL implemented in application layer

- apps use TSL libraries, that use TCP in turn
- cleartext sent into “socket” traverse Internet *encrypted*
- more: Chapter 8 and other network security courses

Application layer: overview

- Principles of network applications
- socket programming with UDP and TCP
- **Web and HTTP**
- E-mail, SMTP, IMAP
- The Domain Name System DNS
- P2P applications
- video streaming and content distribution networks



Web and HTTP

First, a quick review...

- web page consists of *objects*, each of which can be stored on different Web servers
- object can be HTML file, JPEG image, Java applet, audio file,...
- web page consists of *base HTML-file* which includes *several referenced objects, each* addressable by a *URL*, e.g.,

`www.someschool.edu/someDept/pic.gif`


host name

path name

HTTP overview

HTTP: hypertext transfer protocol

- Web's application-layer protocol
- client/server model:
 - *client*: browser that requests, receives, (using HTTP protocol) and “displays” Web objects
 - *server*: Web server sends (using HTTP protocol) objects in response to requests

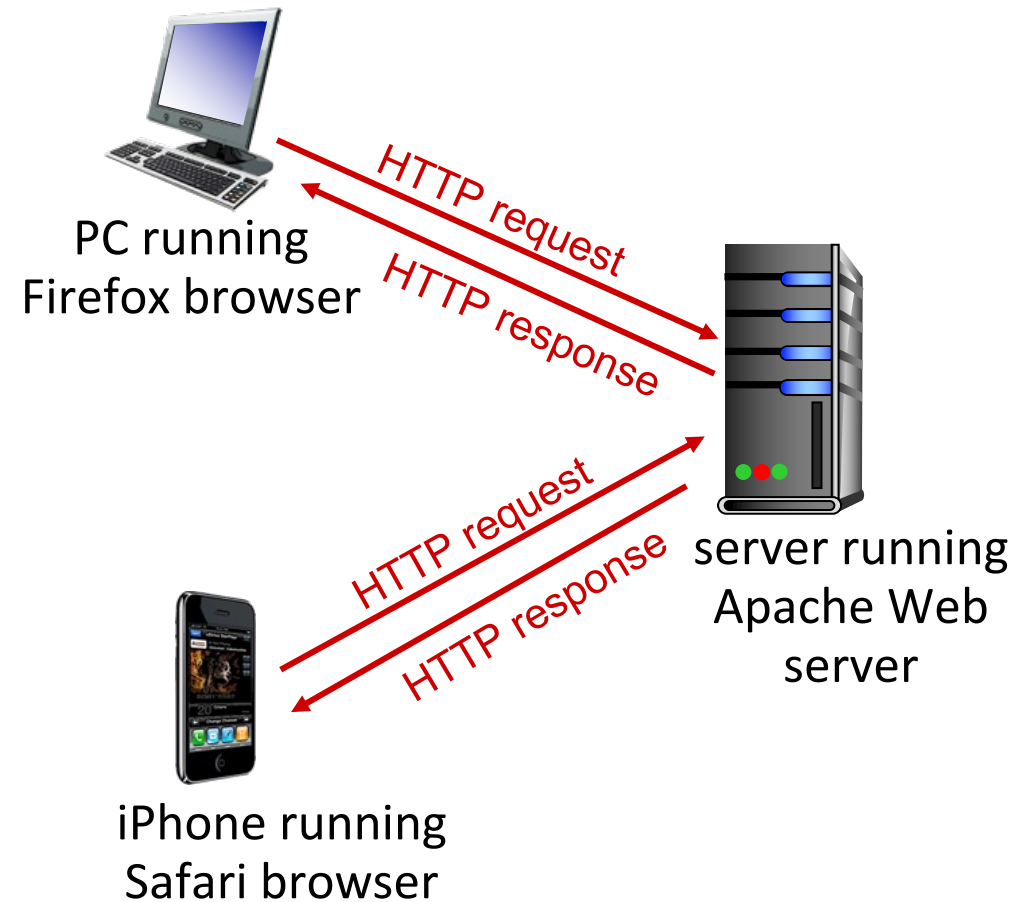

HTTP overview (continued)

HTTP uses TCP:

- client initiates TCP connection (creates socket) to server, port 80
- server accepts TCP connection from client
- HTTP messages (application-layer protocol messages) exchanged between browser (HTTP client) and Web server (HTTP server)
- TCP connection closed

HTTP is “stateless”

- server maintains *no* information about past client requests

aside
protocols that maintain “state” are complex!

- past history (state) must be maintained
- if server/client crashes, their views of “state” may be inconsistent, must be reconciled

HTTP connections: two types

Non-persistent HTTP

1. TCP connection opened
2. at most one object sent over TCP connection
3. TCP connection closed

downloading multiple objects required multiple connections

Persistent HTTP

- TCP connection opened to a server
- multiple objects can be sent over *single* TCP connection between client, and that server
- TCP connection closed

Non-persistent HTTP: example

User enters URL: `www.someSchool.edu/someDepartment/home.index`
(containing text, references to 10 jpeg images)



1a. HTTP client initiates TCP connection to HTTP server (process) at `www.someSchool.edu` on port 80



1b. HTTP server at host `www.someSchool.edu` waiting for TCP connection at port 80 “accepts” connection, notifying client


2. HTTP client sends HTTP *request message* (containing URL) into TCP connection socket. Message indicates that client wants object `someDepartment/home.index`

3. HTTP server receives request message, forms *response message* containing requested object, and sends message into its socket

time
↓

Non-persistent HTTP: example (cont.)

User enters URL: `www.someSchool.edu/someDepartment/home.index`
(containing text, references to 10 jpeg images)

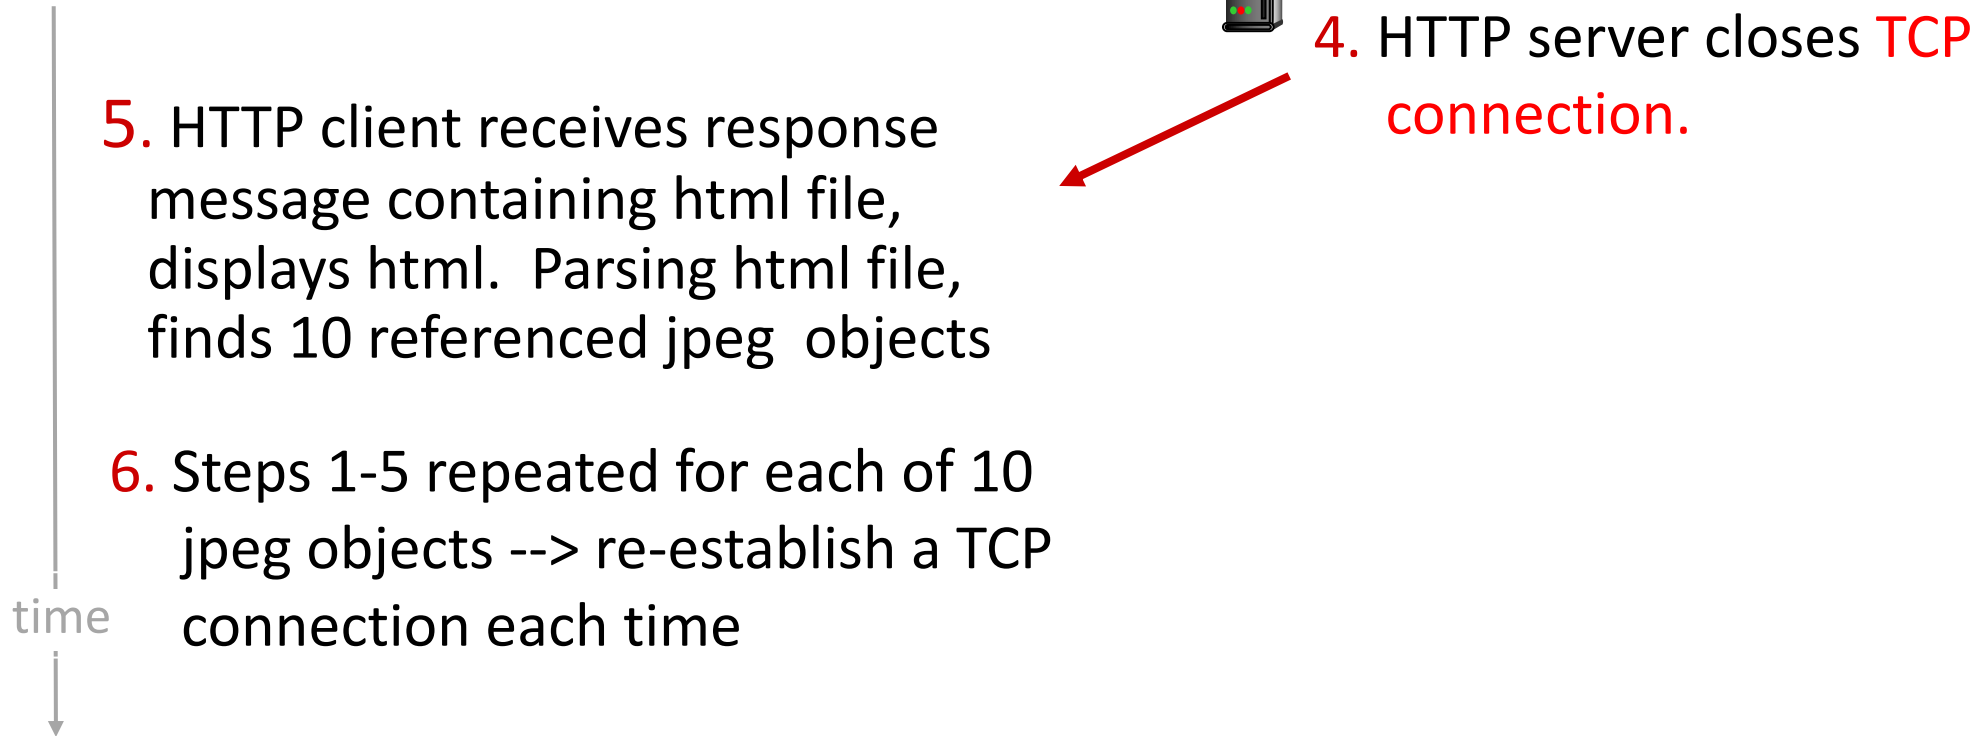


Non-persistent HTTP: response time

RTT (Round-Trip Time): time for a small packet to travel from client to server and back

HTTP response time (per object):

- one RTT to initiate TCP connection
- one RTT for HTTP request and first few bytes of HTTP response to return
- object/file transmission time

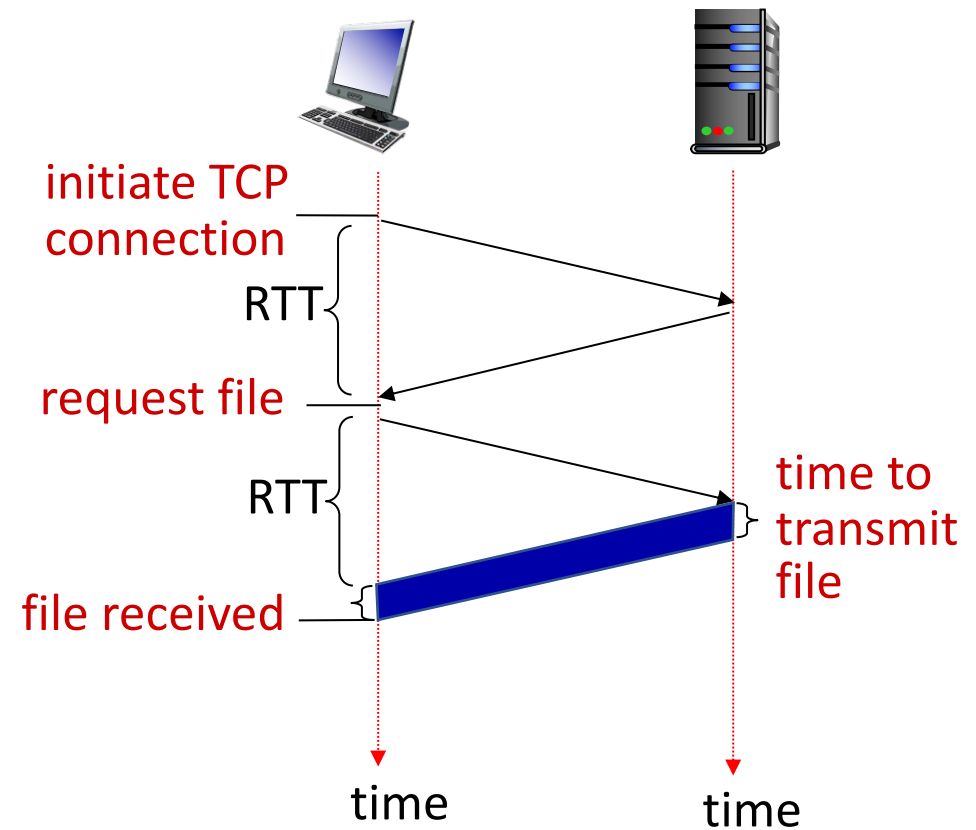

Non-persistent HTTP response time = 2RTT + file transmission time

Persistent HTTP (HTTP 1.1)

Non-persistent HTTP issues:

- requires 2 RTTs per object
- OS overhead for *each* TCP connection
- browsers often open multiple parallel TCP connections to fetch referenced objects in parallel

Persistent HTTP (HTTP1.1):

- server leaves **TCP connection** open after sending response
- subsequent HTTP messages between same client/server sent over open TCP connection
- client sends requests as soon as it encounters a referenced object
- as little as one RTT for all the referenced objects (cutting response time in half)

HTTP request message

- two types of HTTP messages: *request, response*
- **HTTP request message:**
 - ASCII (human-readable format)

request line
(GET, POST)

header
lines


Followed by “entity
body” or just “body”

carriage return character
line-feed character

```
GET /index.html HTTP/1.1\r\n
Host: www-net.cs.umass.edu\r\n
User-Agent: Mozilla/5.0 (Macintosh; Intel Mac OS X
10.15; rv:80.0) Gecko/20100101 Firefox/80.0 \r\n
Accept: text/html,application/xhtml+xml\r\n
Accept-Language: en-us,en;q=0.5\r\n
Accept-Encoding: gzip,deflate\r\n
Connection: keep-alive\r\n
\r\n
```

* Check out the online interactive exercises for more
examples: http://gaia.cs.umass.edu/kurose_ross/interactive/

HTTP response message

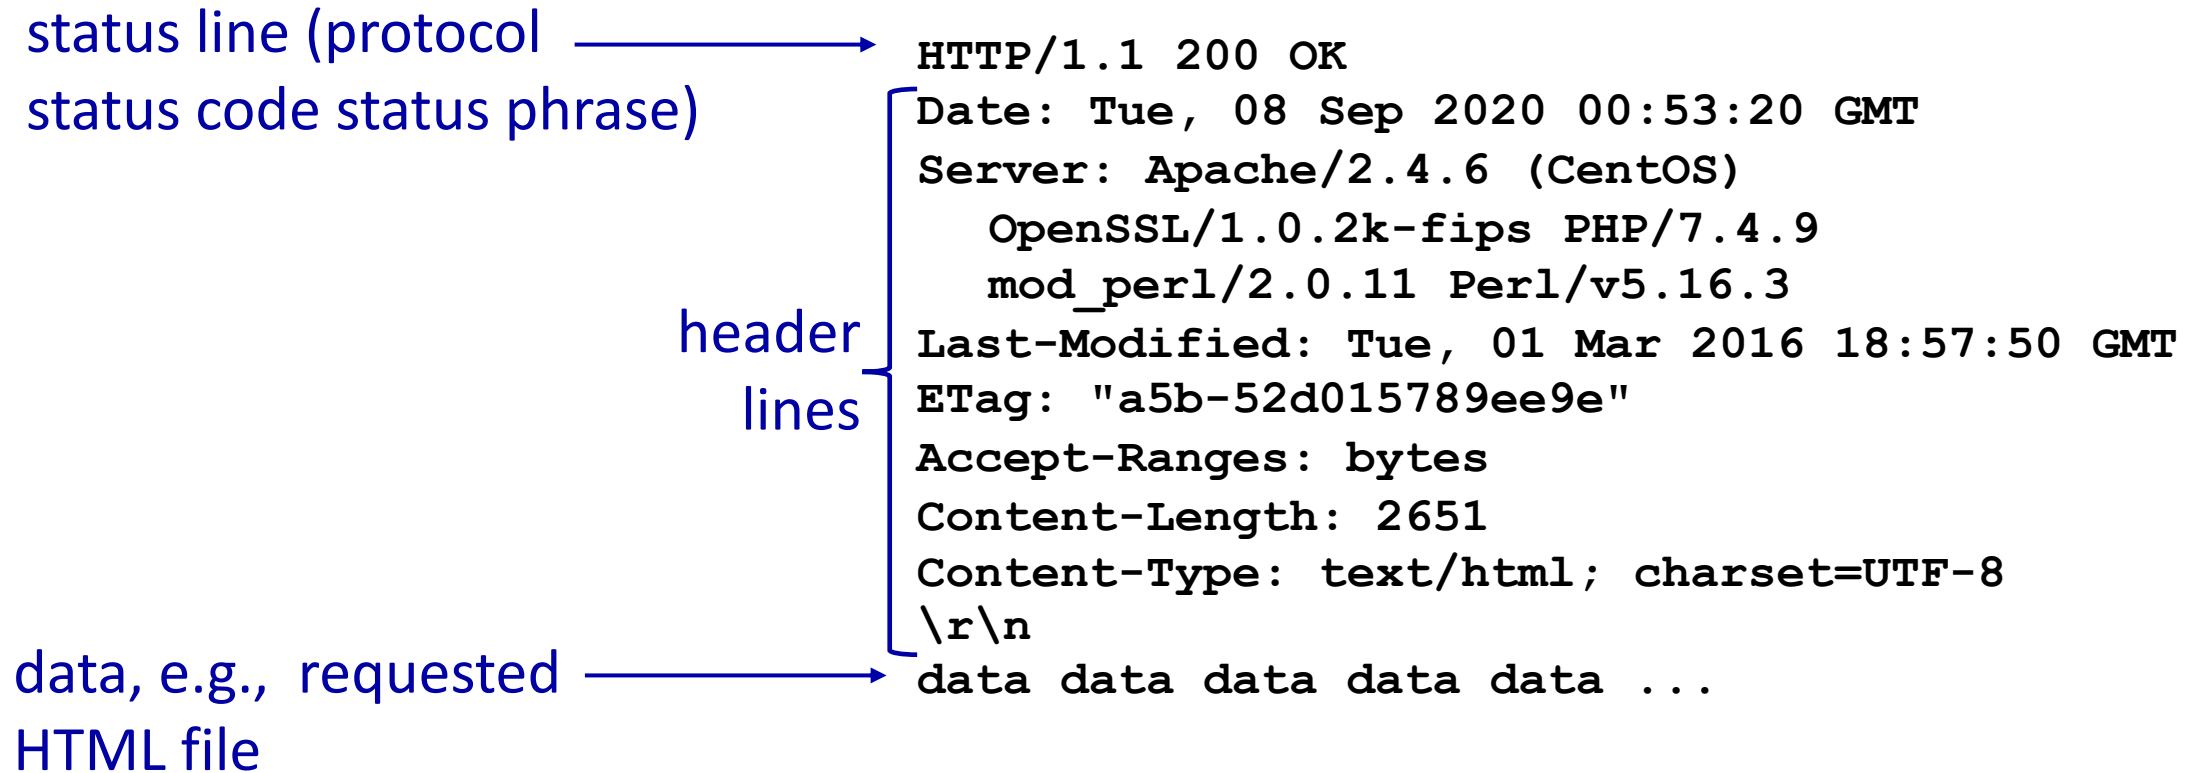

* Check out the online interactive exercises for more examples: http://gaia.cs.umass.edu/kurose_ross/interactive/

HTTP response status codes

- status code appears in 1st line in server-to-client response message.
- some sample codes:

200 OK

- request succeeded, requested object later in this message

301 Moved Permanently

- requested object moved, new location specified later in this message (in Location: field)

400 Bad Request

- request msg not understood by server

404 Not Found

- requested document not found on this server

505 HTTP Version Not Supported

Trying out HTTP (client side) for yourself

1. netcat to your favorite Web server (verified on Mac OS):

```
% nc -c -v gaia.cs.umass.edu 80
```

- opens TCP connection to port 80 (default HTTP server port) at gaia.cs.umass.edu.
- anything typed in will be sent to port 80 at gaia.cs.umass.edu

2. type in a GET HTTP request:

```
GET /kurose_ross/interactive/index.php HTTP/1.1  
Host: gaia.cs.umass.edu
```

- by typing this in (hit carriage return twice), you send this minimal (but complete) GET request to HTTP server

3. look at response message sent by HTTP server!


(or use Wireshark to look at captured HTTP request/response)

Maintaining user/server state: cookies

Recall: HTTP GET/response interaction is *stateless*

- no notion of multi-step exchanges of HTTP messages to complete a Web “transaction”
 - no need for client/server to track “state” of multi-step exchange
 - all HTTP requests are independent of each other
 - no need for client/server to “recover” from a partially-completed-but-never-completely-completed transaction

a *stateful protocol*: client makes two changes to X , or none at all

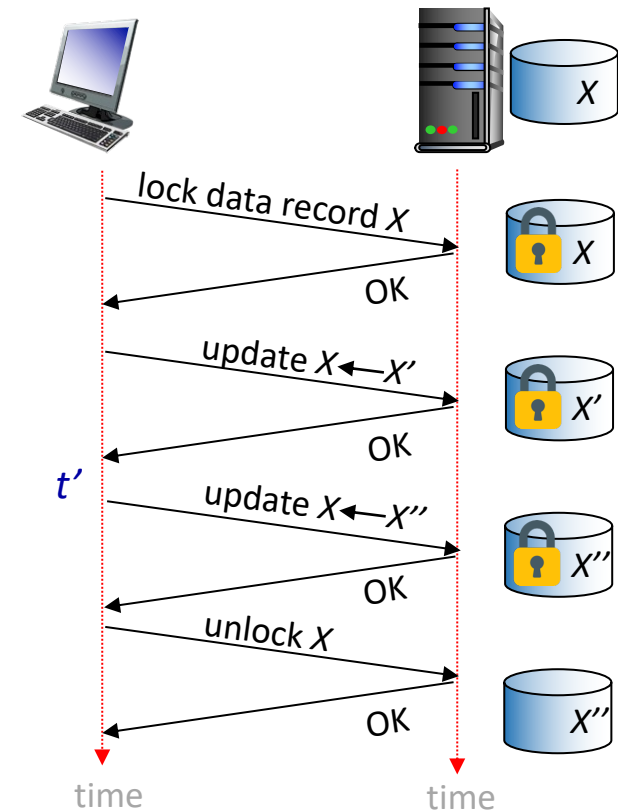

Q: what happens if network connection or client crashes at t' ?

Maintaining user/server state: cookies

Web sites and client browsers use *cookies* to maintain some state between transactions


four components:

- 1) cookie header line of HTTP *response* message
- 2) cookie header line in next HTTP *request* message
- 3) cookie file kept on user's host, managed by user's browser
- 4) back-end database at Web site

Example:

- Susan uses browser on laptop, visits specific e-commerce site for first time
- when initial HTTP request arrives at site, site creates:
 - unique ID (aka “cookie”)
 - entry in backend database for ID
- subsequent HTTP requests from Susan to this site will contain cookie ID value, allowing site to “identify” Susan

Maintaining user/server state: cookies

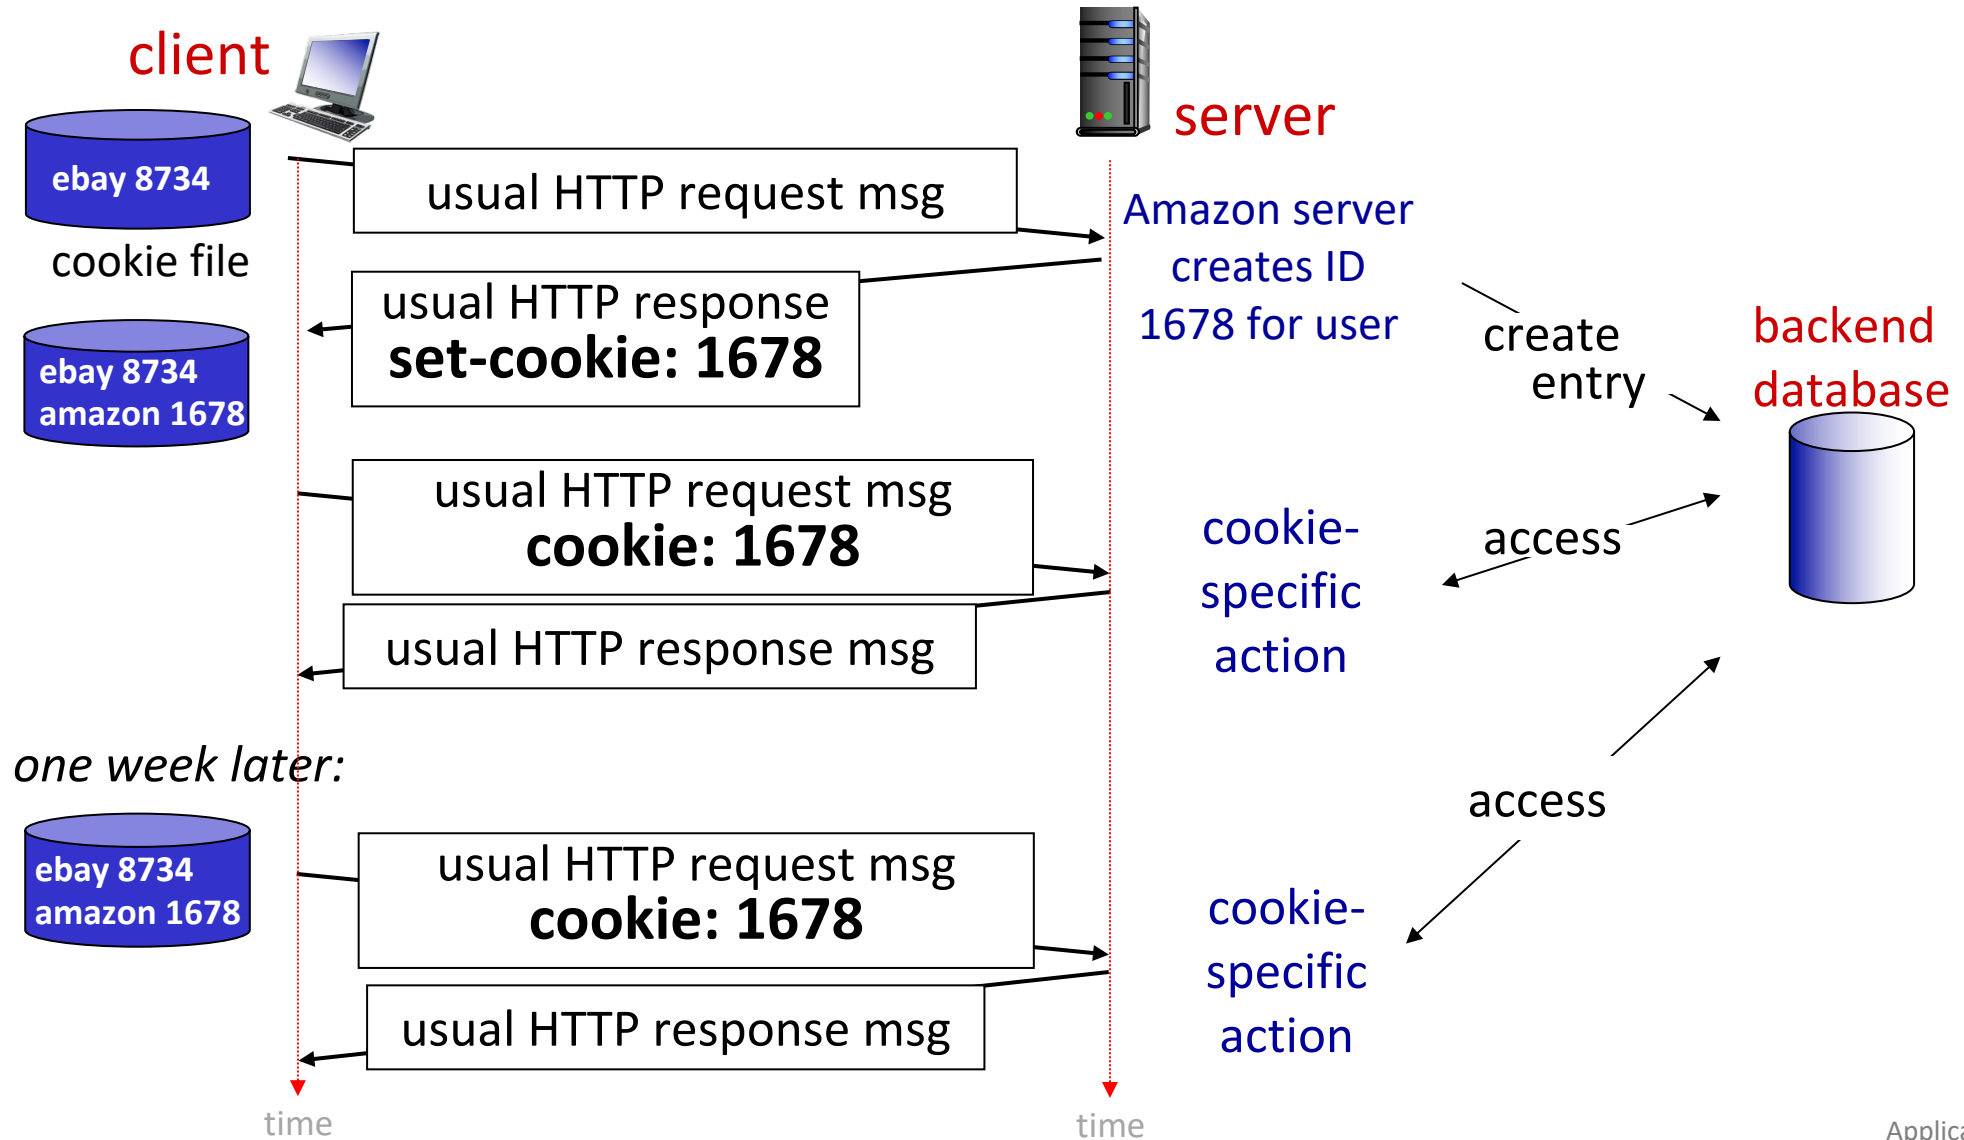

HTTP cookies: comments

What cookies can be used for:

- authorization
- shopping carts
- recommendations
- user session state (Web e-mail)

Challenge: How to keep state?

- *at protocol endpoints:* maintain state at sender/receiver over multiple transactions
- *in messages:* cookies in HTTP messages carry state

aside


cookies and privacy:

- cookies permit sites to *learn* a lot about you on their site.
- third party persistent cookies (tracking cookies) allow common identity (cookie value) to be tracked across multiple web sites

Web caches

Goal: satisfy client requests without involving origin server

- user configures browser to point to a (local) *Web cache*
- browser sends all HTTP requests to cache
 - *if* object in cache: cache returns object to client
 - *else* cache requests object from origin server, caches received object, then returns object to client

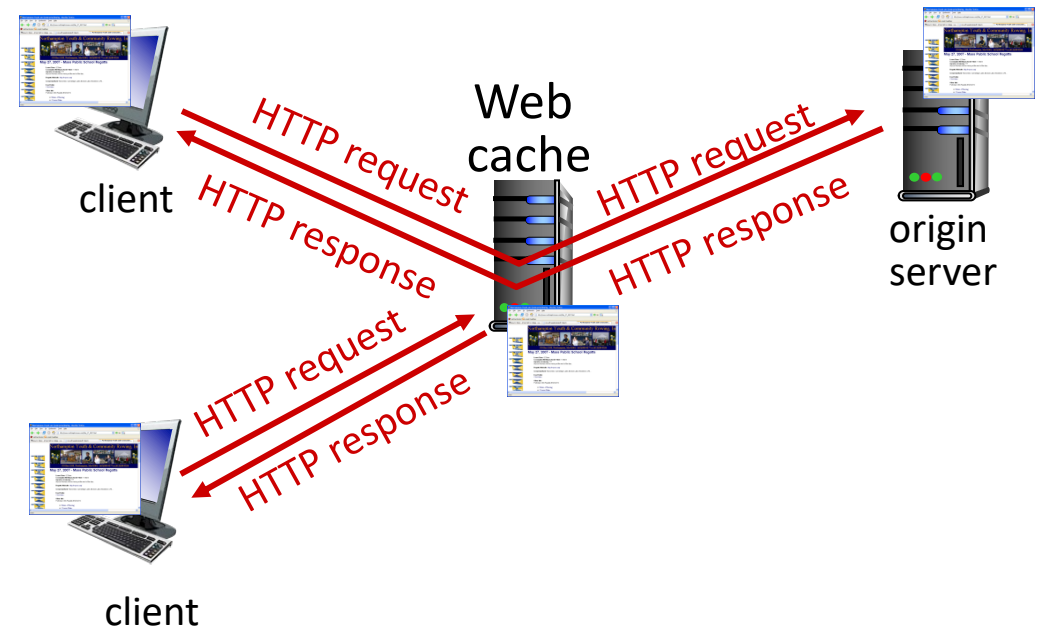

Web caches (aka proxy servers)

- Web cache acts as both client and server
 - server for original requesting client
 - client to origin server
- server tells cache about object's allowable caching in response header:

```
Cache-Control: max-age=<seconds>
```

```
Cache-Control: no-cache
```

Why Web caching?

- reduce response time for client request
 - cache is closer to client
- reduce traffic on an institution's access link
- Internet is dense with caches
 - enables “poor” content providers to more effectively deliver content

Caching example



Scenario:

- access link rate: 1.54 Mbps
- RTT from institutional router to server: 2 sec
- web object size: 100K bits
- average request rate from browsers to origin servers: 15/sec
 - avg data rate to browsers: 1.50 Mbps

Performance:

- access link utilization = .97
- LAN utilization: .0015
- end-end delay = Internet delay + access link delay + LAN delay
= 2 sec + minutes + usecs

problem: large queueing delays at high utilization!

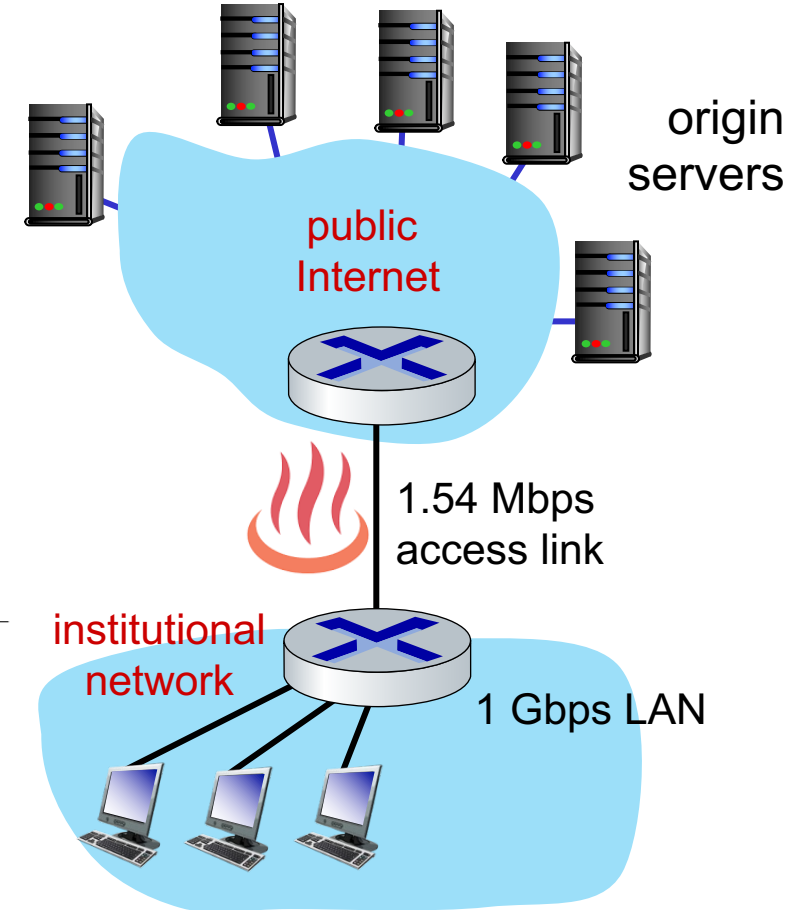

Option 1: buy a faster access link


Scenario:

- access link rate: ~~1.54~~ 154 Mbps
- RTT from institutional router to server: 2 sec
- web object size: 100K bits
- average request rate from browsers to origin servers: 15/sec
 - avg data rate to browsers: 1.50 Mbps

Performance:

- access link utilization = ~~.97~~ .0097
- LAN utilization: .0015
- end-end delay = Internet delay +
access link delay + LAN delay
= 2 sec + ~~minutes~~ + usecs

Cost: faster access link (expensive!) → msecs

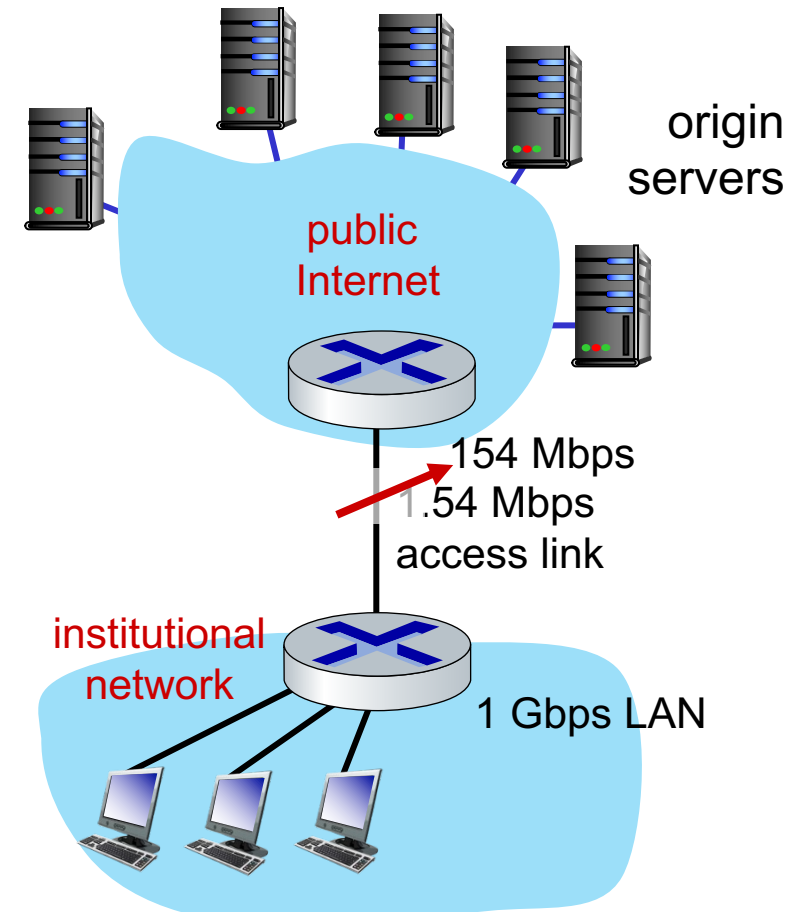

Option 2: install a web cache


Scenario:

- access link rate: 1.54 Mbps
- RTT from institutional router to server: 2 sec
- web object size: 100K bits
- average request rate from browsers to origin servers: 15/sec
 - avg data rate to browsers: 1.50 Mbps

Cost: web cache (cheap!)

Performance:


- LAN utilization: .?
 - access link utilization = ?
 - average end-end delay = ?
- How to compute link utilization, delay?*

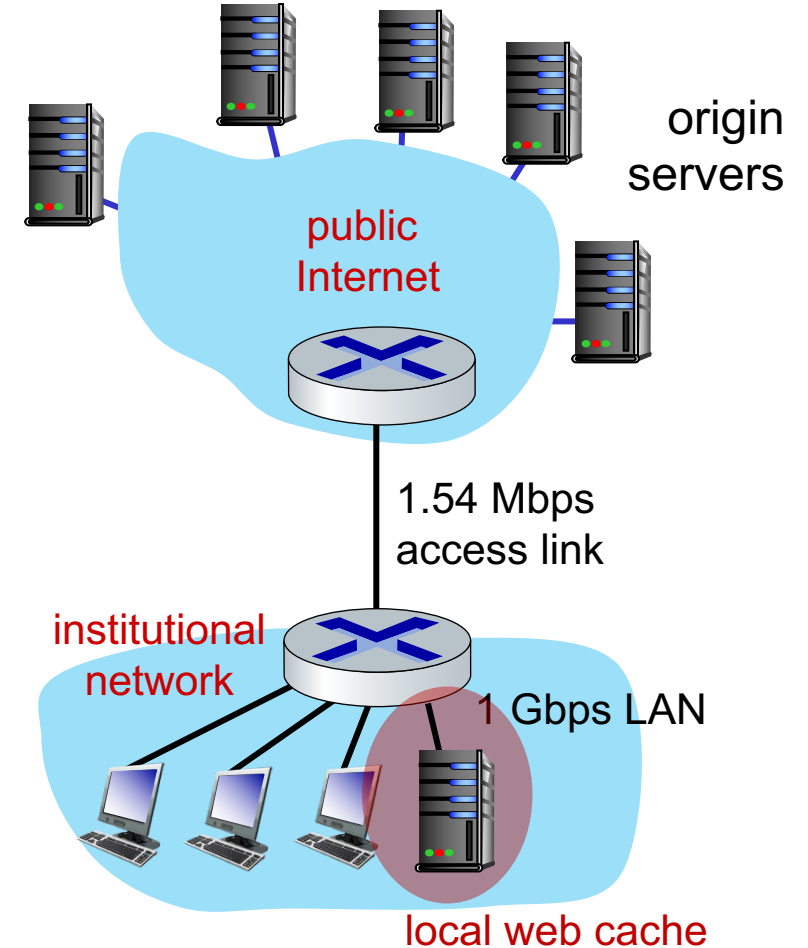

Calculating access link utilization, end-end delay with cache:

suppose cache hit rate is 0.4:

- 40% requests served by cache, with low (msec) delay
- 60% requests satisfied at origin
 - rate to browsers over access link
 $= 0.6 * 1.50 \text{ Mbps} = .9 \text{ Mbps}$
 - access link utilization $= 0.9 / 1.54 = .58$ means low (msec) queueing delay at access link
- average end-end delay:
 $= 0.6 * (\text{delay from origin servers})$
 $+ 0.4 * (\text{delay when satisfied at cache})$
 $= 0.6 (2.01) + 0.4 (\sim \text{msecs}) = \sim 1.2 \text{ secs}$

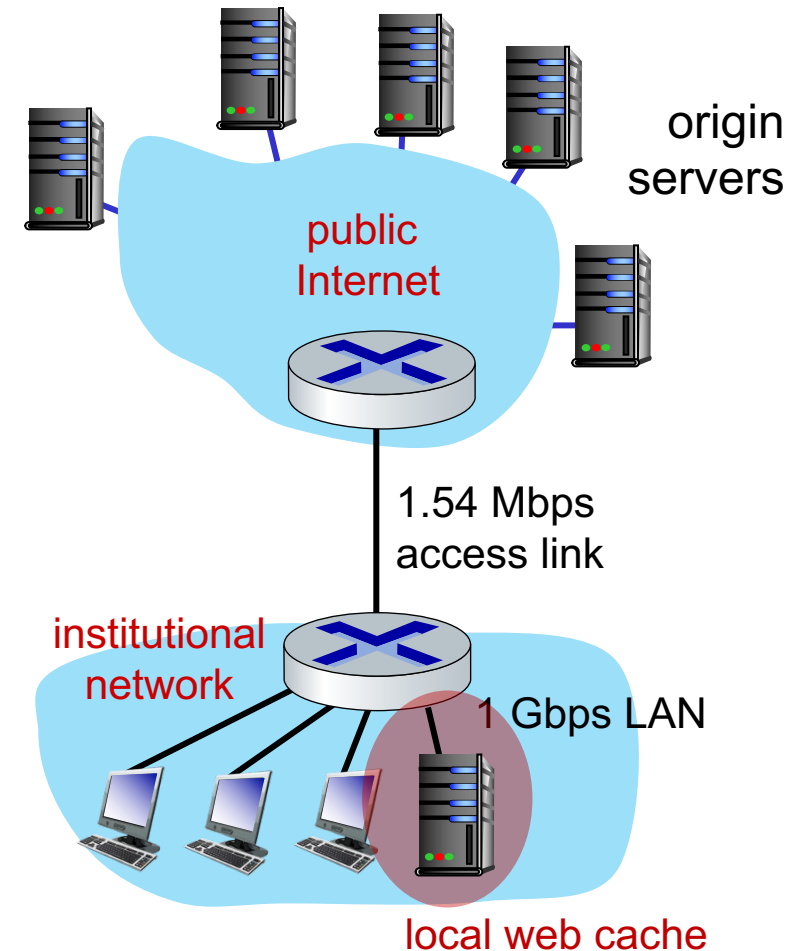


lower average end-end delay than with 154 Mbps link (and cheaper too!)

Conditional GET

Goal: don't send object if cache has up-to-date cached version

- no object transmission delay (or use of network resources)
- **client:** specify date of cached copy in HTTP request
If-modified-since: <date>
- **server:** response contains no object if cached copy is up-to-date:
HTTP/1.0 304 Not Modified

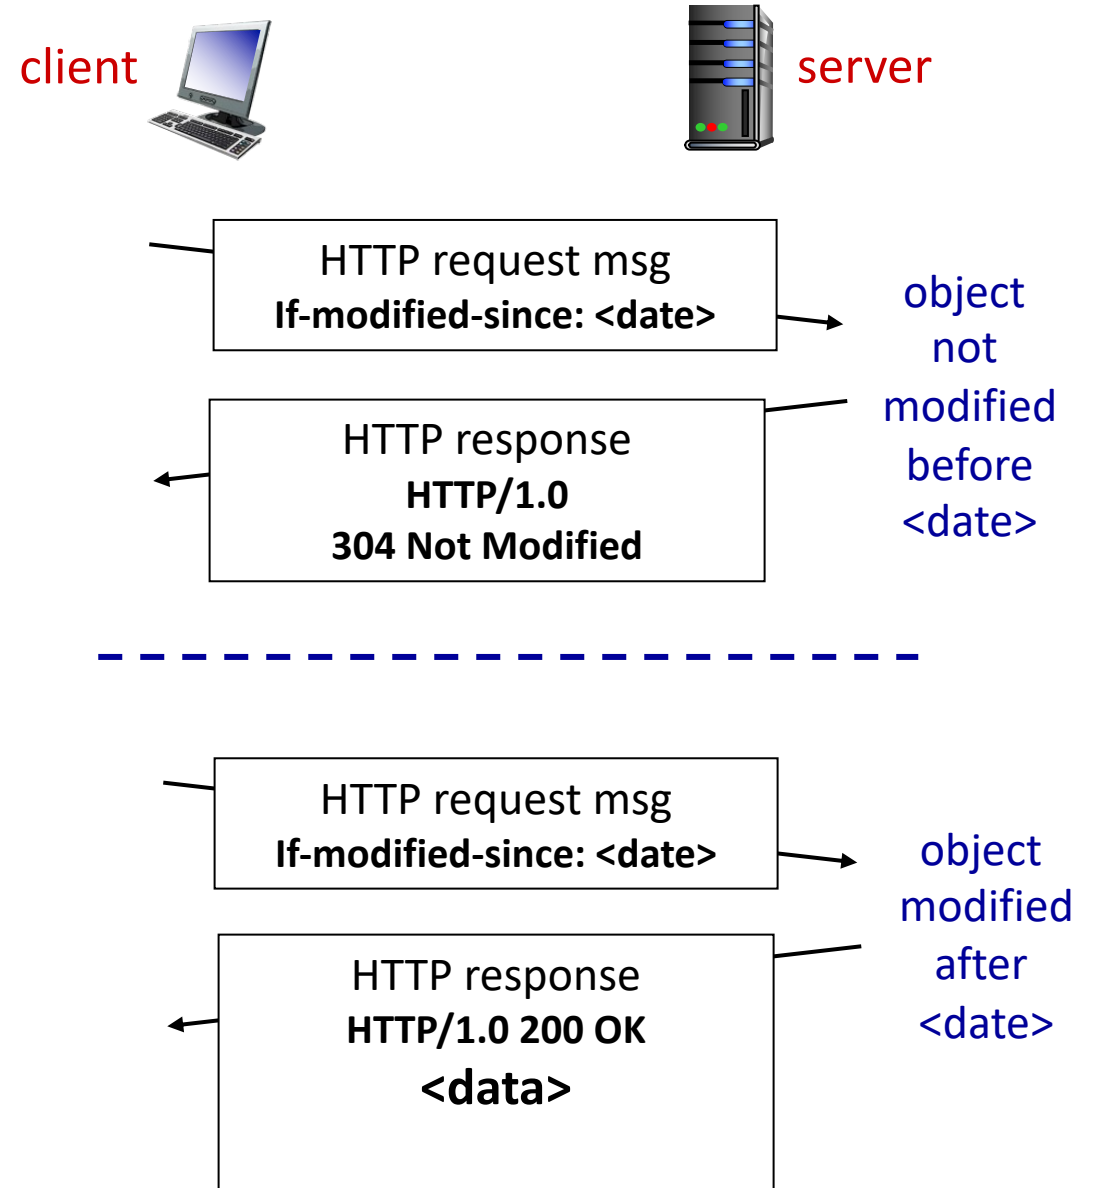

HTTP/2

Key goal: decreased delay in multi-object HTTP requests

HTTP1.1: introduced multiple, pipelined GETs over single TCP connection

- server responds *in-order* (FCFS: first-come-first-served scheduling) to GET requests
- with FCFS, small object may have to wait for transmission (**head-of-line (HOL) blocking**) behind large object(s)
- loss recovery (retransmitting lost TCP segments) stalls object transmission

HTTP/2


Key goal: decreased delay in multi-object HTTP requests

HTTP/2: [RFC 7540, 2015] increased flexibility at *server* in sending objects to client:

- methods, status codes, most header fields unchanged from HTTP 1.1
- transmission order of requested objects based on client-specified object priority (not necessarily FCFS)
- *push* unrequested objects to client
- divide objects into **frames**, schedule frames to mitigate HOL blocking

HTTP/2: mitigating HOL blocking


HTTP 1.1: client requests 1 large object (e.g., video file) and 3 smaller objects

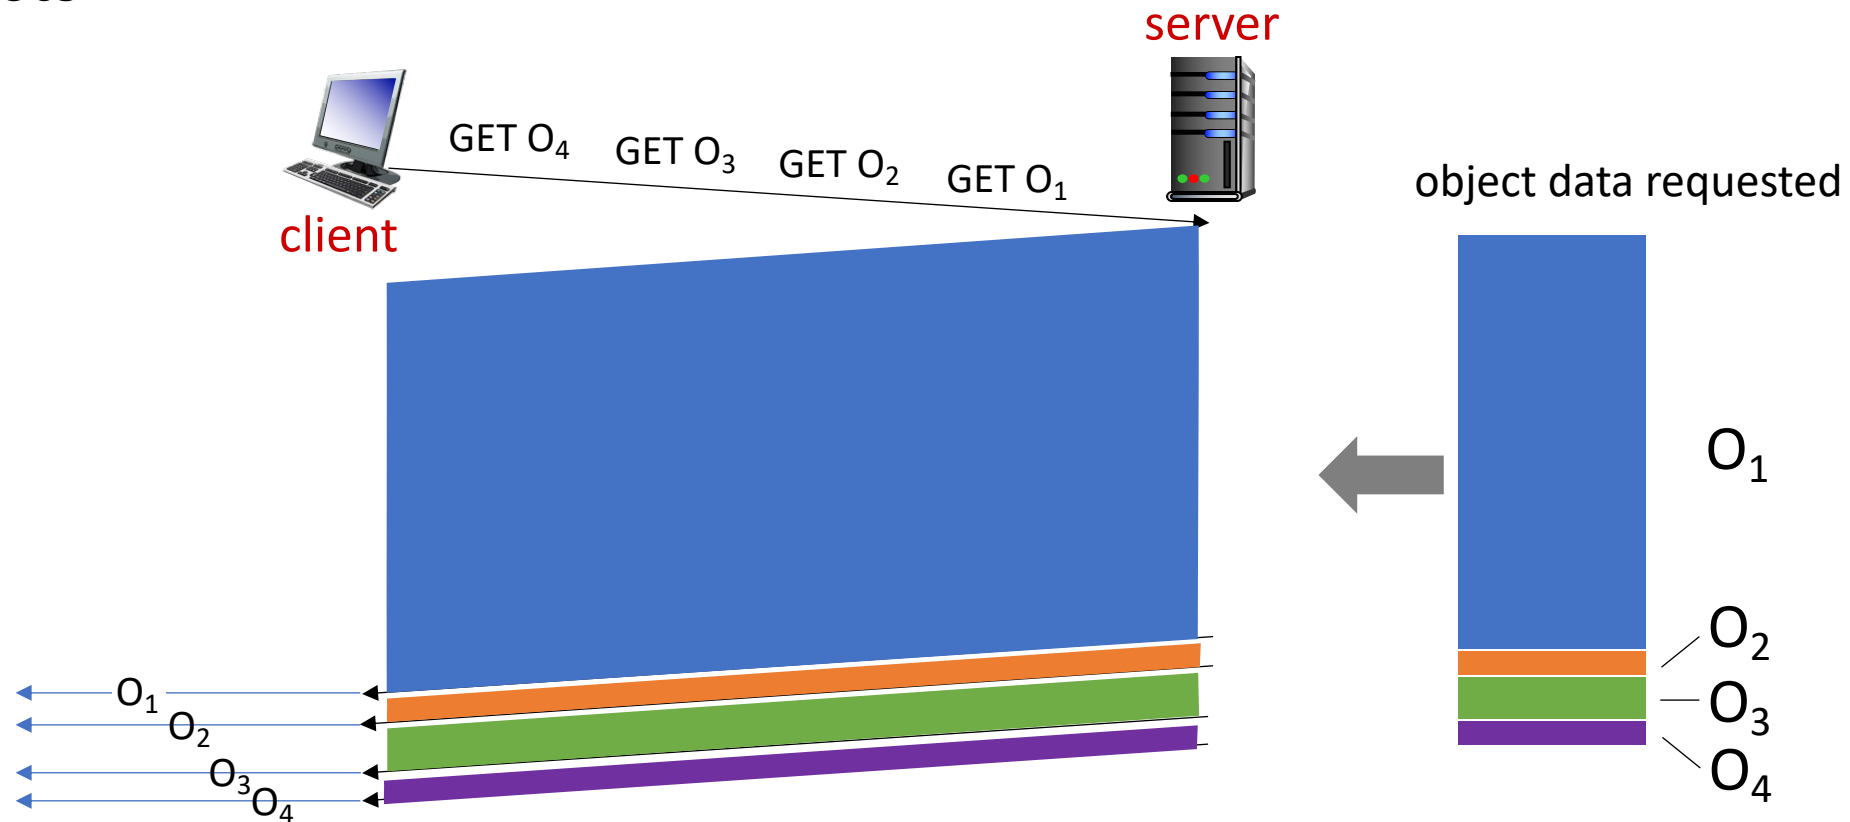

objects delivered in order requested: O_2 , O_3 , O_4 wait behind O_1

HTTP/2: mitigating HOL blocking

HTTP/2: objects divided into frames, frame transmission interleaved

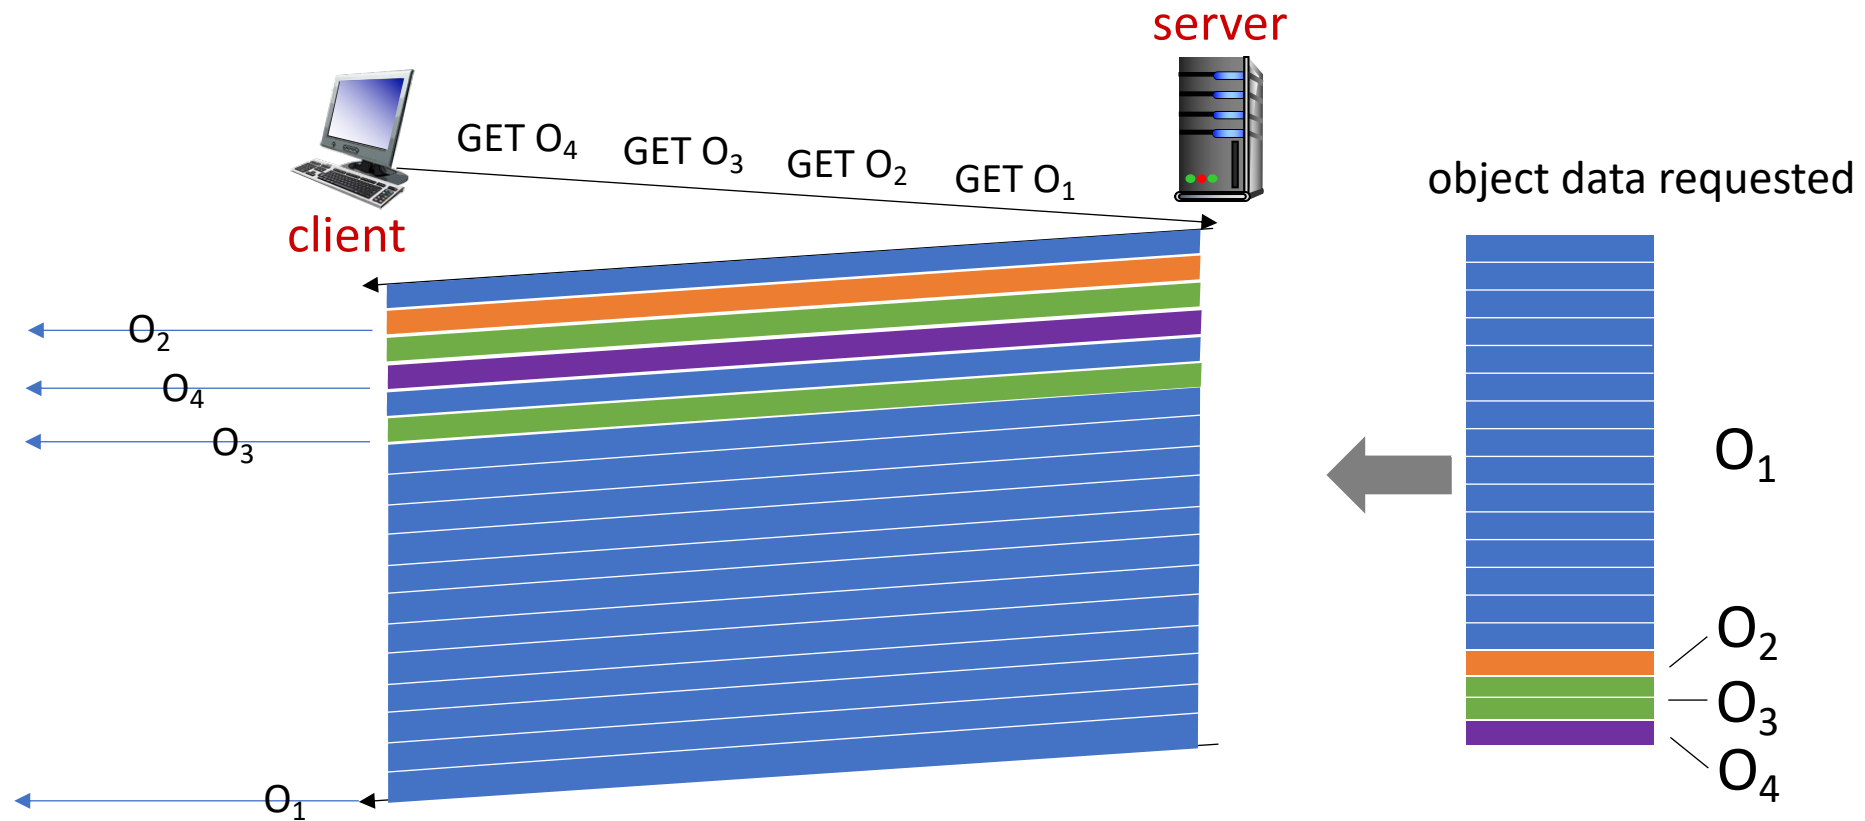

O₂, O₃, O₄ delivered quickly, O₁ slightly delayed

HTTP/2 to HTTP/3

HTTP/2 over **single** TCP connection means:

- recovery from packet loss still stalls all object transmissions
 - as in HTTP 1.1, browsers have incentive to open multiple parallel TCP connections to reduce stalling, increase overall throughput
- no security over vanilla TCP connection
- **HTTP/3**: adds security, per object error- and congestion-control (more pipelining) over UDP
 - more on HTTP/3 in transport layer