


# Seed-noise ruler: prediction errors must sit below arm noise

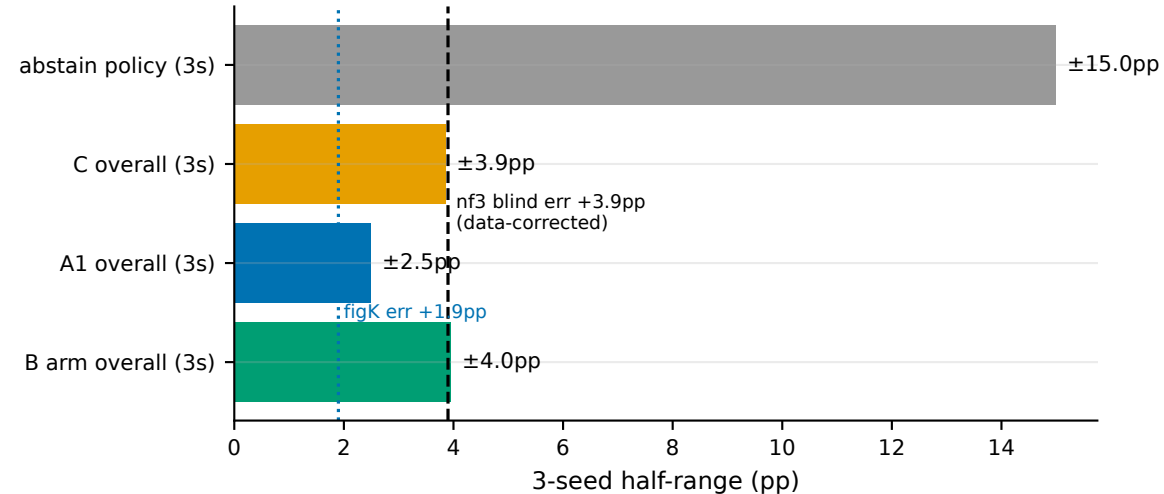

Sources: loop3/eval/genre\_scores.json (3-seed arms; half of max-min). Abstain = retrieve\_or\_abstain acc across B seeds .34/.15/.45  $\rightarrow \pm 15$ pp: its predictions must be judged multi-seed. Ref lines: nf3 format holdout (+3.9pp, corrected from slide's 3.5 per batch1\_scores) and figK keep holdout (+1.9pp).