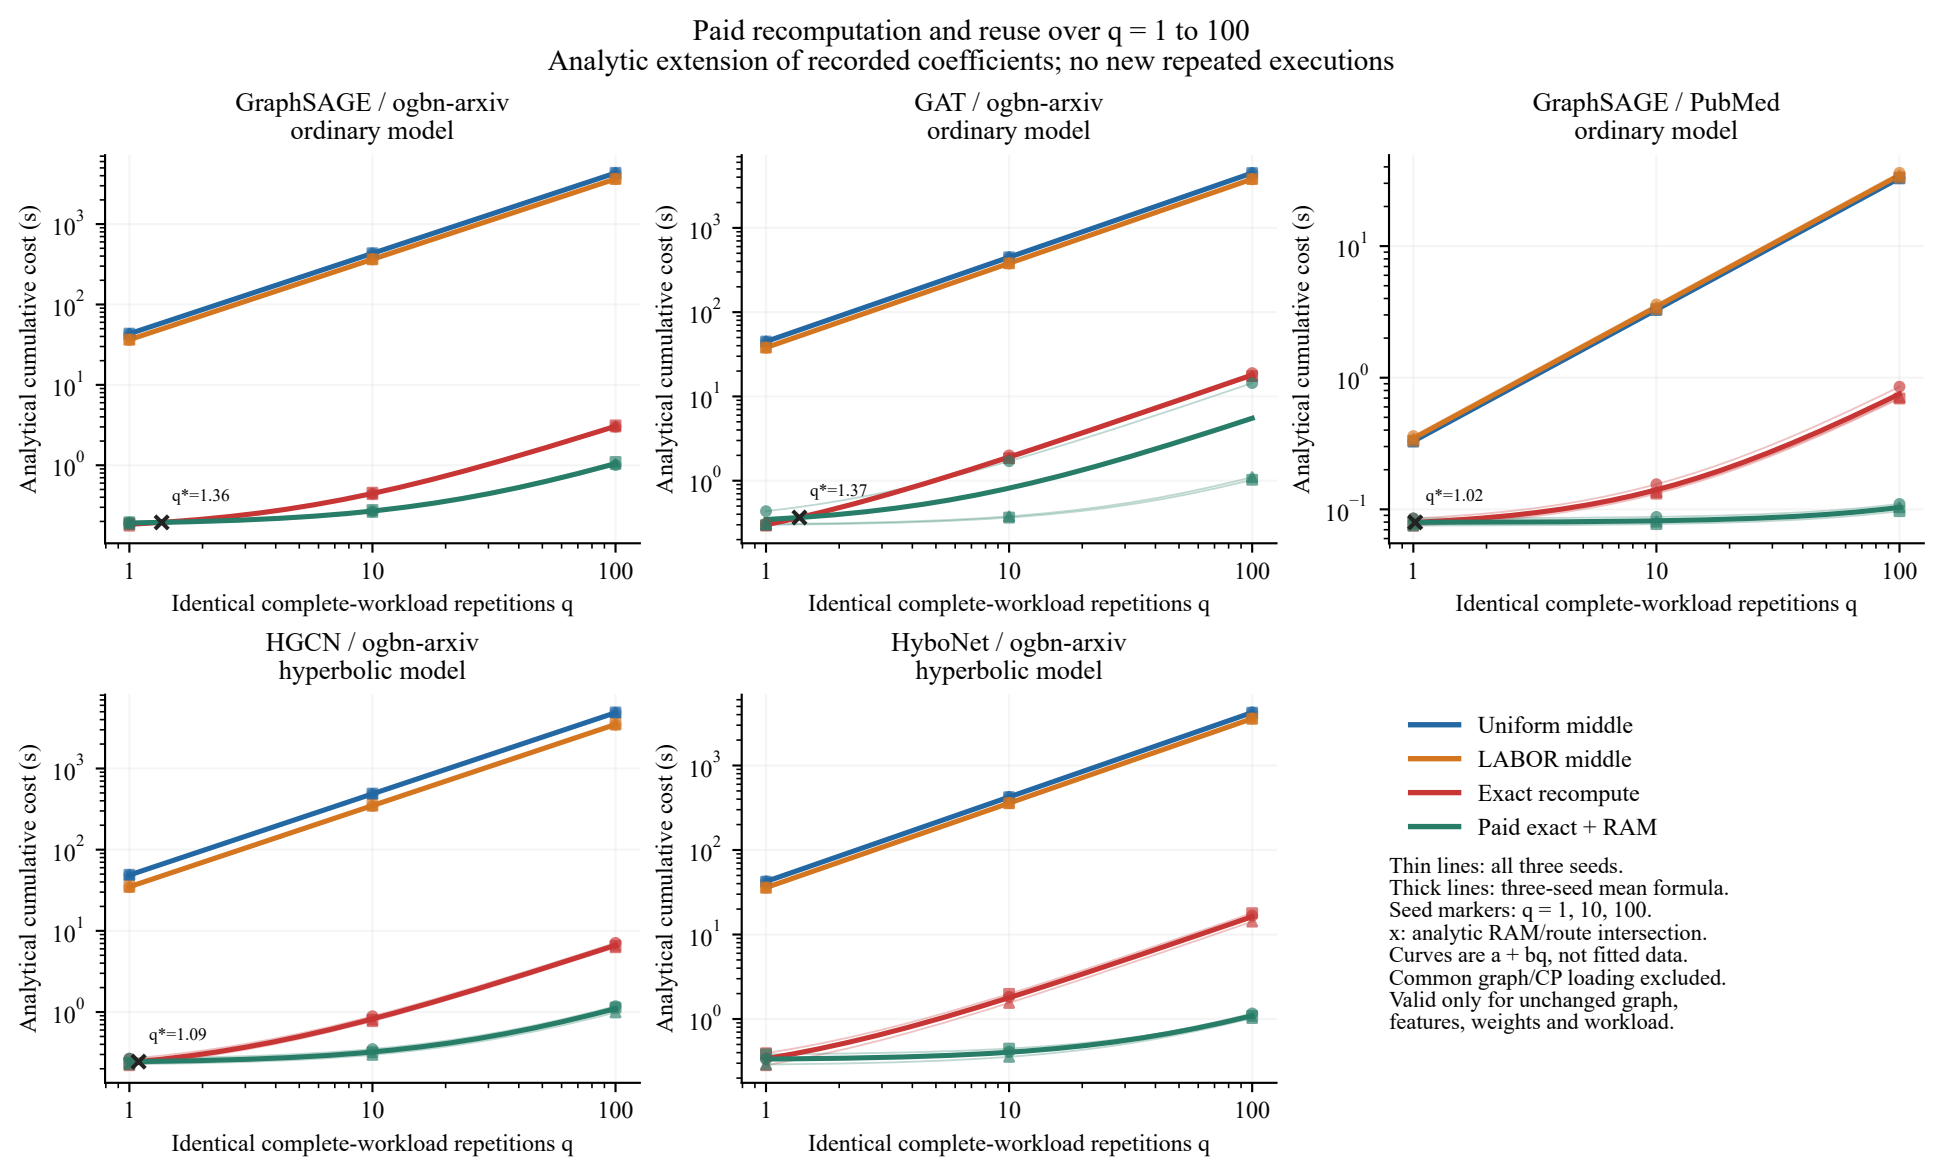

Paid recomputation and reuse over q = 1 to 100
Analytic extension of recorded coefficients; no new repeated executions
GraphSAGE / ogbn-arxiv
ordinary model
GAT / ogbn-arxiv
ordinary model
GraphSAGE / PubMed
ordinary model
HGCN / ogbn-arxiv
hyperbolic model
HyboNet / ogbn-arxiv
hyperbolic model
Analytical cumulative cost (s)
Identical complete-workload repetitions q
q*=1.36
q*=1.37
q*=1.02
q*=1.09
Uniform middle
LABOR middle
Exact recompute
Paid exact + RAM
Thin lines: all three seeds.
Thick lines: three-seed mean formula.
Seed markers: q = 1, 10, 100.
x: analytic RAM/route intersection.
Curves are a + bq, not fitted data.
Common graph/CP loading excluded.
Valid only for unchanged graph,
features, weights and workload.