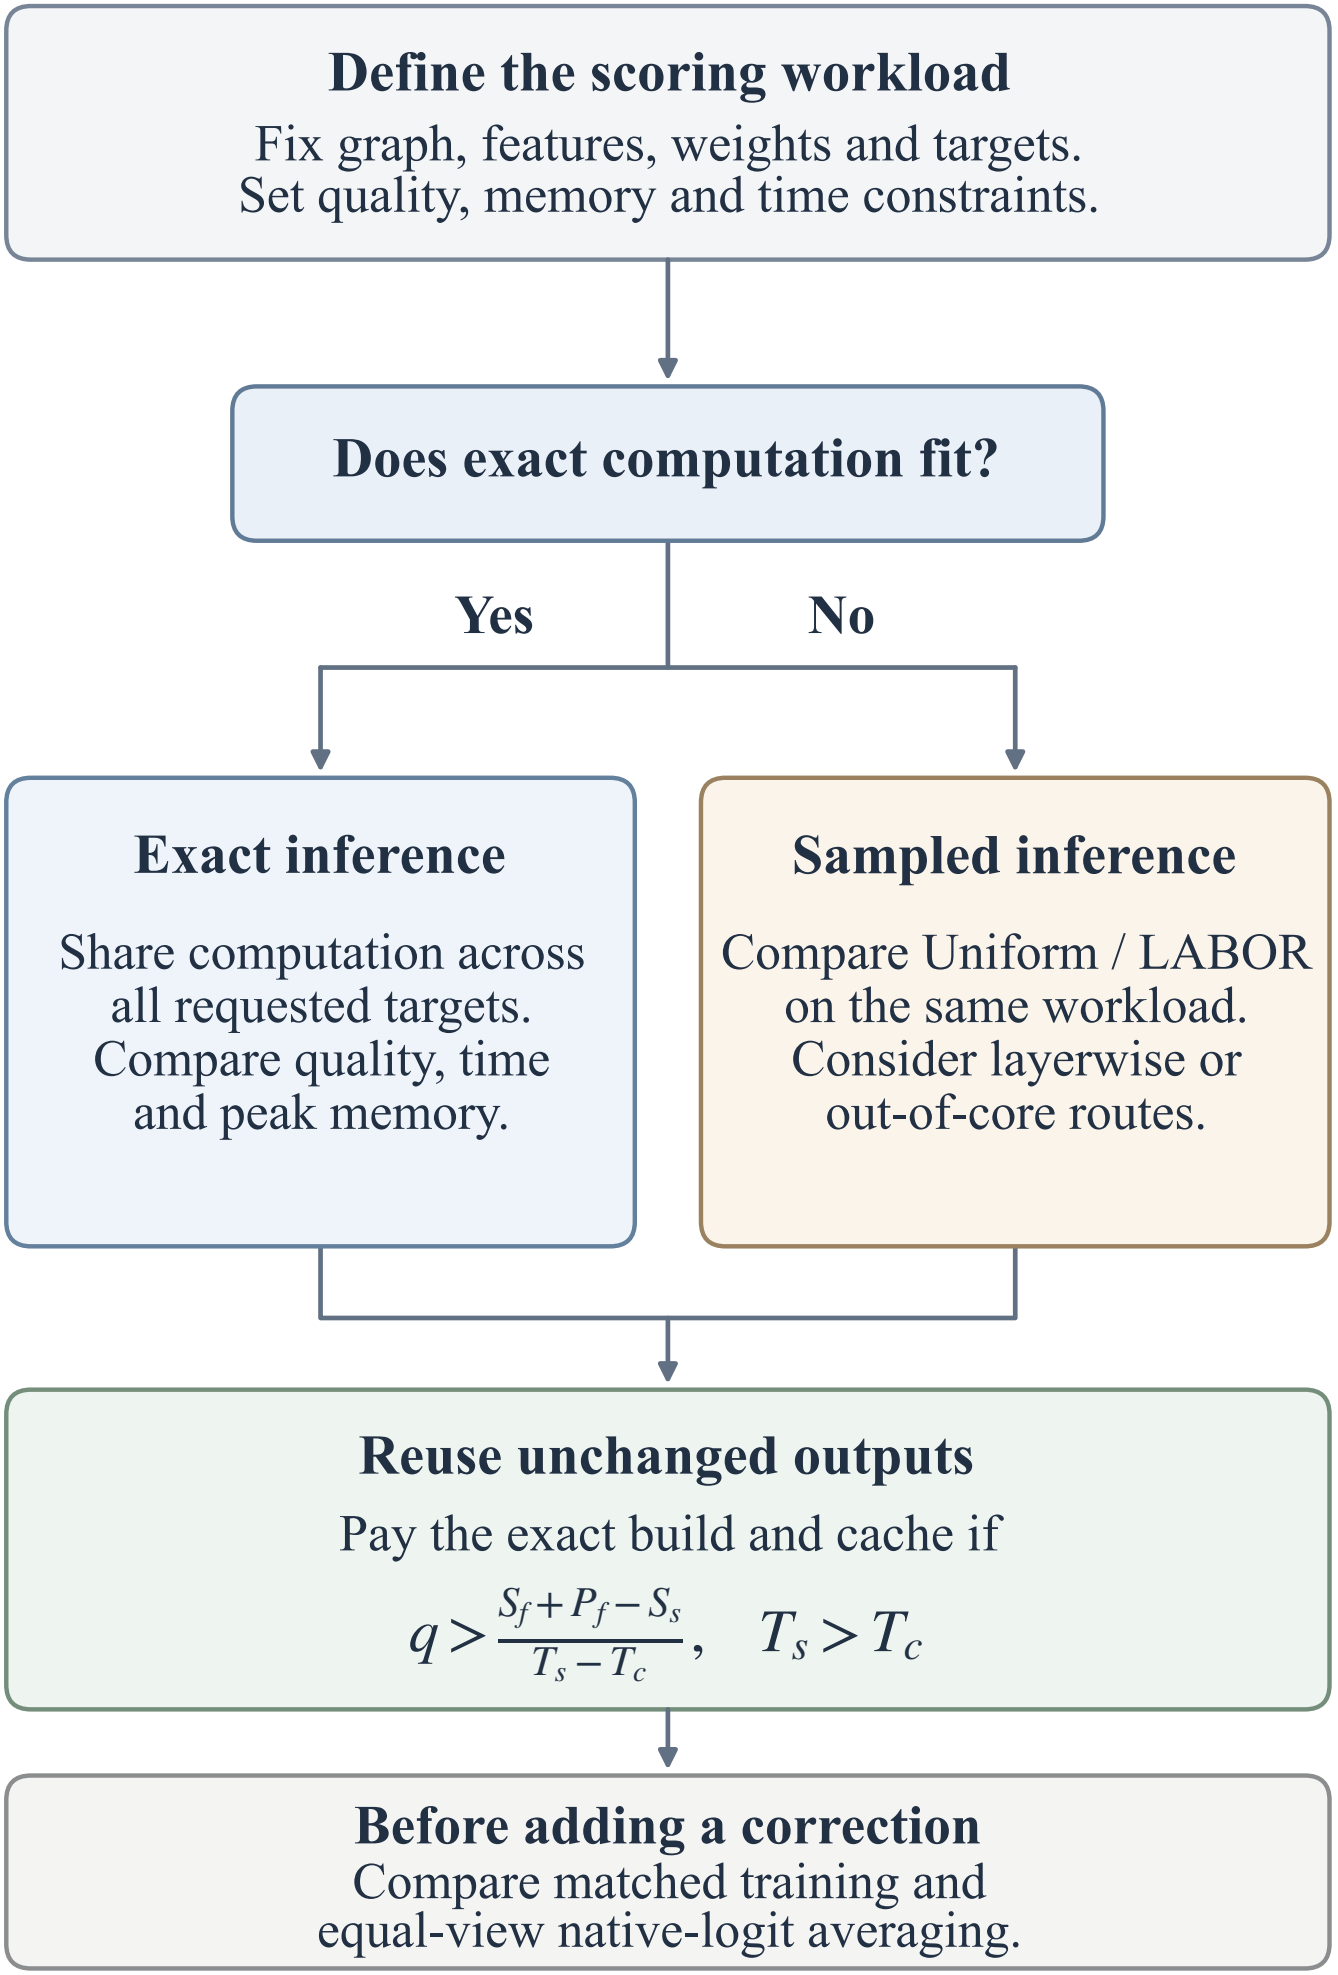

Define the scoring workload
Fix graph, features, weights and targets.
Set quality, memory and time constraints.
Does exact computation fit?
Yes
No
Exact inference
Share computation across all requested targets. Compare quality, time and peak memory.
Sampled inference
Compare Uniform / LABOR on the same workload. Consider layerwise or out-of-core routes.
Reuse unchanged outputs
Pay the exact build and cache if
$q > \frac{S_f + P_f - S_s}{T_s - T_c}, \quad T_s > T_c$
Before adding a correction
Compare matched training and equal-view native-logit averaging.