
How can we enable sample-efficient RL in the real world by mixing multi-fidelity data, while being robust to low-fidelity data biases?

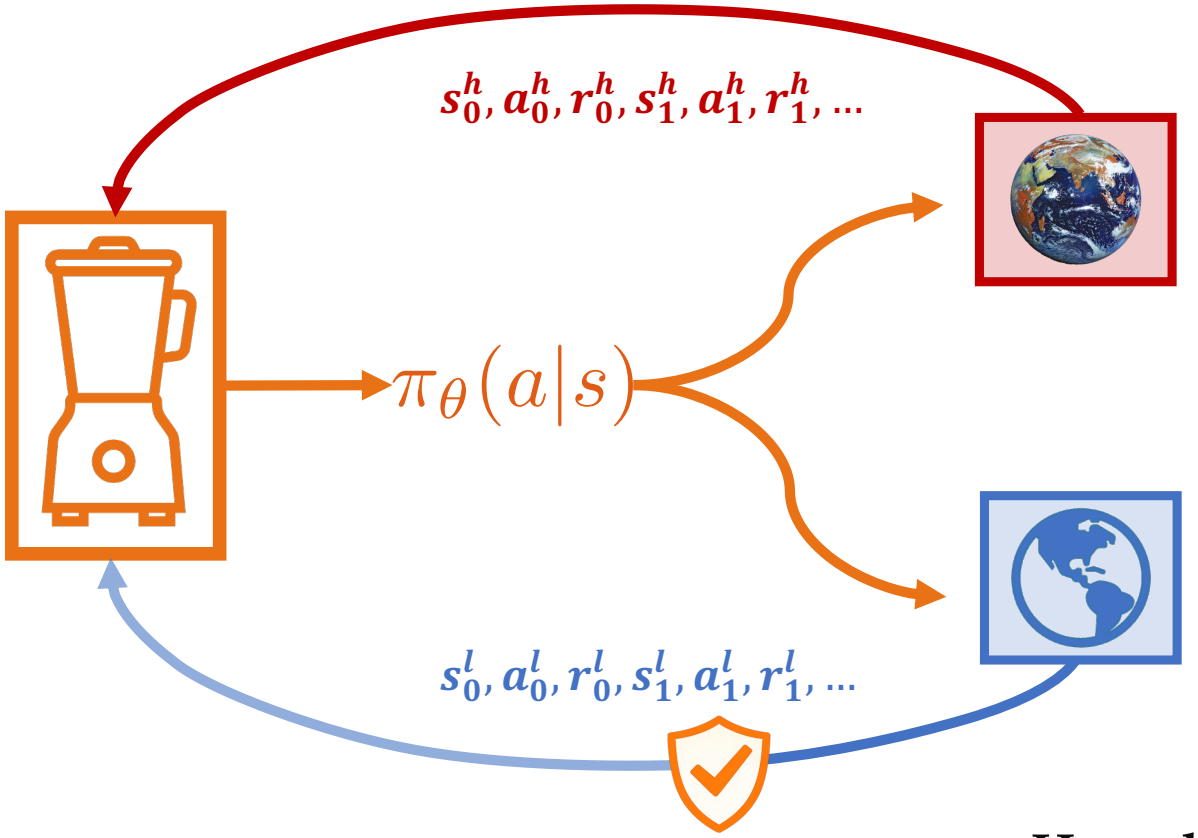

$$$$, slow, unsafe
✅ accurate

$, fast, safe
❌ biased

… How do we build the blender?