

DOM Manipulation

We're going to cover different ways of:

- changing an element's style
- adding/removing classes
- changing the content of a tag
- changing attributes(src, href, etc.)

Style

The style property is one way to manipulate an element's style


```
/SELECT
var tag = document.getElementById("highlight");

//MANIPULATE
tag.style.color = "blue";
tag.style.border = "10px solid red";
tag.style.fontSize = "70px";
tag.style.background = "yellow";
tag.style.marginTop = "200px";
```

Is This a Bad Idea?

It is recommended for styles to be defined in a separate file or files.
The style property allows for quick styling, for example for testing purposes. - MDN

Separation of Concerns

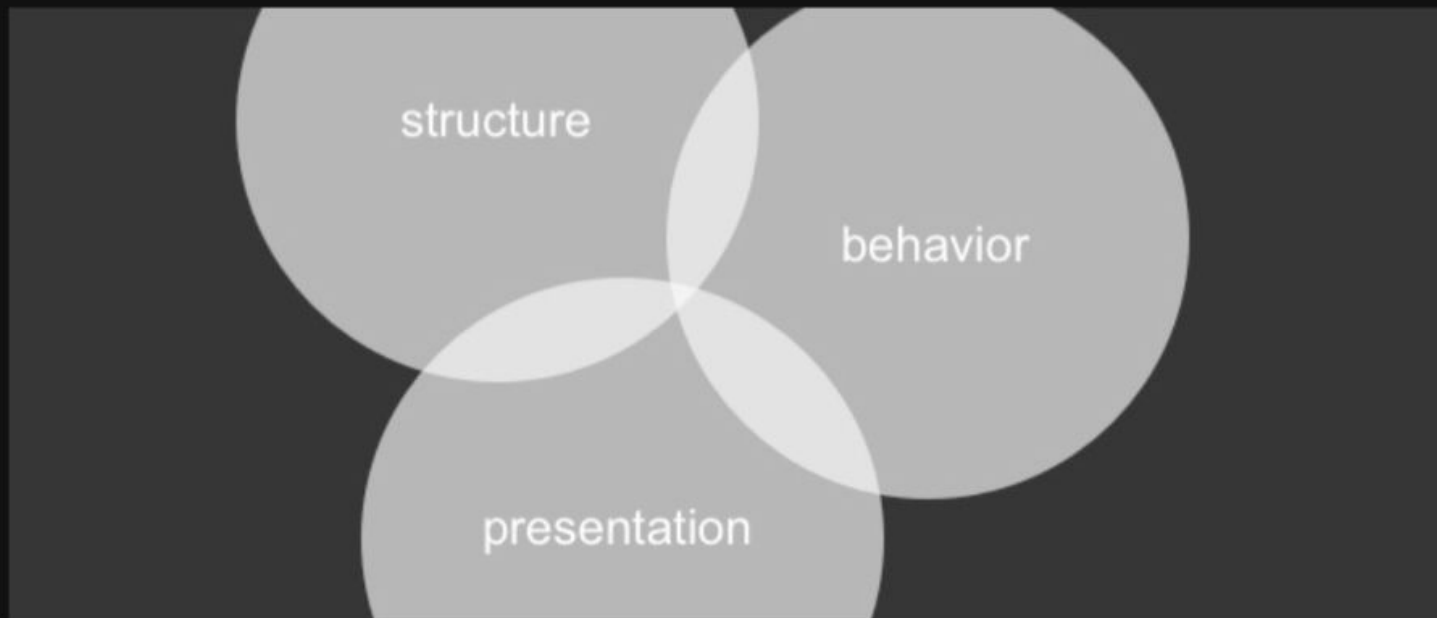

<http://blog.teamtreehouse.com>

An Alternative

Rather than directly manipulating style with JS, we can define a CSS class and then toggle it on or off with JS

```
//INSTEAD OF THIS:  
var tag = document.getElementById("highlight");  
tag.style.color = "blue";  
tag.style.border = "10px solid red";
```

```
/*DEFINE A CLASS IN CSS*/  
.some-class {  
  color: blue;  
  border: 10px solid red;  
}
```

```
var tag = document.getElementById("highlight");  
//ADD THE NEW CLASS TO THE SELECTED ELEMENT  
tag.classList.add("some-class");
```

classList

A read-only list that contains the classes for a given element. It is **not an array**.

```
/*DEFINE A CLASS IN CSS*/  
.another-class {  
  color: purple;  
  fontSize: 76px;  
}
```

```
var tag = document.querySelector("h1");  
  
//ADD A CLASS TO THE SELECTED ELEMENT  
tag.classList.add("another-class");  
  
//REMOVE A CLASS  
tag.classList.remove("another-class");  
  
//TOGGLE A CLASS  
tag.classList.toggle("another-class");
```

textContent

Returns a string of all the text contained in
a given element

```
<p>  
  This is an <strong>awesome</strong> paragraph  
</p>
```

```
//Select the <p> tag:  
var tag = document.querySelector("p");  
  
//Retrieve the textContent:  
tag.textContent //"This is an awesome paragraph"  
  
//alter the textContent:  
tag.textContent = "blah blah blah";
```


innerHTML

Similar to `textContent`, except it returns a string of all the HTML contained in a given element

```
<p>  
  This is an <strong>awesome</strong> paragraph  
</p>
```

```
//Select the <p> tag:  
var tag = document.querySelector("p");  
  
tag.innerHTML  
// "This is an <strong>awesome</strong> paragraph"
```