



POLYTECHNIQUE
MONTRÉAL

UNIVERSITÉ
D'INGÉNIERIE




Low-Rank Matrix and Tensor Methods for Multidimensionnal Data Modeling

Xinyu Chen

University of Montreal, Canada

July 28, 2023



Ph.D. Candidate
Xinyu Chen



Supervisor
Prof. Nicolas Saunier



Co-supervisor
Prof. Lijun Sun (McGill)

Recent studies:

- ① X. Chen, C. Zhang, X. Chen, N. Saunier, L. Sun (2023). Discovering dynamic patterns from spatiotemporal data with time-varying low-rank autoregression. *IEEE Transactions on Knowledge and Data Engineering*. Early access.
- ② X. Chen, Z. Cheng, N. Saunier, L. Sun (2022). Laplacian convolutional representation for traffic time series imputation. *arXiv preprint arXiv:2212.01529*.
- ③ X. Chen, L. Sun (2022). Bayesian temporal factorization for multidimensional time series prediction. *IEEE Transactions on Pattern Analysis and Machine Intelligence*. 44 (9): 4659-4673.

GitHub repository:


- **transdim**: Machine learning for spatiotemporal traffic data imputation and forecasting. (1,000 stars & 270 forks on GitHub)
<https://github.com/xinychen/transdim>

Slides:

- https://xinychen.github.io/slides/tensors_in10min.pdf

Tensors


- What is tensor? $\mathbf{X} \in \mathbb{R}^{m \times n}$ vs. $\mathcal{X} \in \mathbb{R}^{m \times n \times t}$

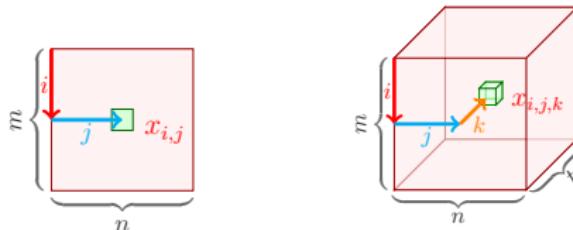

- Tensors are everywhere!




Color image with
RGB channels

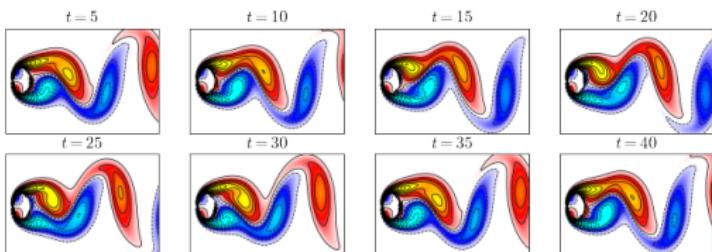


Dynamical system (fluid flow)

Tensor Factorization

- Revisit tensor factorization (TF)

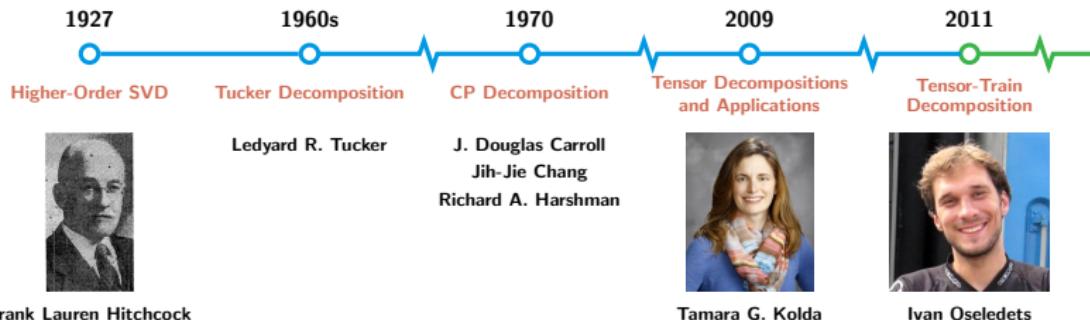

- **CP tensor factorization:** Factorize \mathcal{Y} into the combination of three rank- R factor matrices (i.e., low-dimensional latent factors).

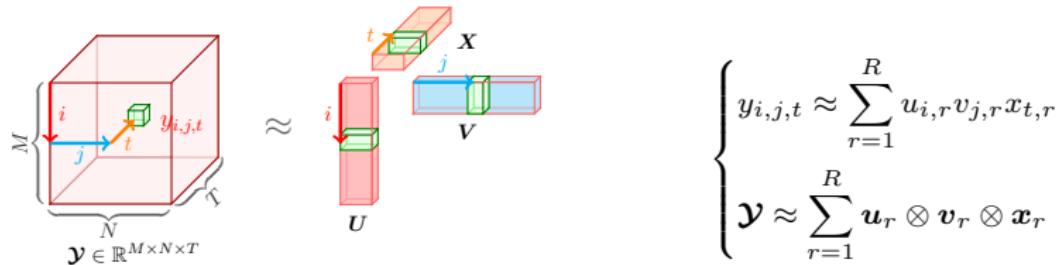

Time-Varying Autoregression

- Given a sequence of spatiotemporal measurements
 $\mathbf{y}_t \in \mathbb{R}^N$, $t = 1, 2, \dots, T$

$$\min_{\{\mathbf{A}_t\}} \underbrace{\frac{1}{2} \sum_t \|\mathbf{y}_t - \mathbf{A}_t \mathbf{y}_{t-1}\|_2^2}_{\text{Time-varying autoregression}}$$

[Over-parameterization] $\mathcal{O}(N^2(T-1))$ parameters vs. $\mathcal{O}(NT)$ data.

- (Ours)** Parameterize coefficients via TF:

$$\min_{\mathbf{W}, \mathbf{G}, \mathbf{V}, \mathbf{x}} \underbrace{\frac{1}{2} \sum_t \left\| \mathbf{y}_t - \mathbf{W} \mathbf{G} (\mathbf{x}_t^\top \otimes \mathbf{V})^\top \mathbf{y}_{t-1} \right\|_2^2}_{\text{Let } \mathbf{A}_t = \mathbf{G} \times_1 \mathbf{W} \times_2 \mathbf{V} \times_3 \mathbf{x}_t^\top \text{ be the TF}}$$

- Alternating minimization


$$\begin{aligned} \mathbf{W} &:= \{\mathbf{W} \mid \frac{\partial f}{\partial \mathbf{W}} = \mathbf{0}\} & \mathbf{G} &:= \{\mathbf{G} \mid \frac{\partial f}{\partial \mathbf{G}} = \mathbf{0}\} \\ \mathbf{V} &:= \{\mathbf{V} \mid \frac{\partial f}{\partial \mathbf{V}} = \mathbf{0}\} & \mathbf{x}_t &:= \{\mathbf{x}_t \mid \frac{\partial f}{\partial \mathbf{x}_t} = \mathbf{0}\} \end{aligned}$$

- Solve each subproblem by **conjugate gradient** or **least squares**.

- Time-varying autoregression with TF

$$\min_{\mathbf{W}, \mathbf{G}, \mathbf{V}, \mathbf{x}} \frac{1}{2} \sum_t \left\| \mathbf{y}_t - \mathbf{W} \mathbf{G} (\mathbf{x}_t^\top \otimes \mathbf{V})^\top \mathbf{y}_{t-1} \right\|_2^2$$

- **Fluid flow dataset** (the first 50 snapshots + 50 snapshots randomly selected from the last 100 snapshots)

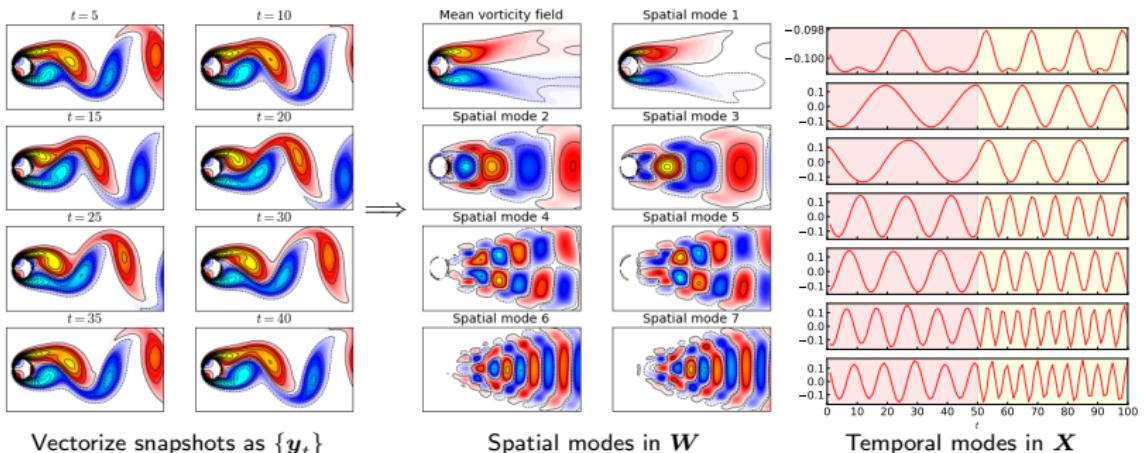


- Produce interpretable patterns and identify the system of different frequencies.

- Time-varying autoregression with TF

$$\min_{\mathbf{W}, \mathbf{G}, \mathbf{V}, \mathbf{x}} \frac{1}{2} \sum_t \left\| \mathbf{y}_t - \mathbf{W} \mathbf{G} (\mathbf{x}_t^\top \otimes \mathbf{V})^\top \mathbf{y}_{t-1} \right\|_2^2$$

- Sea surface temperature (**SST**) dataset

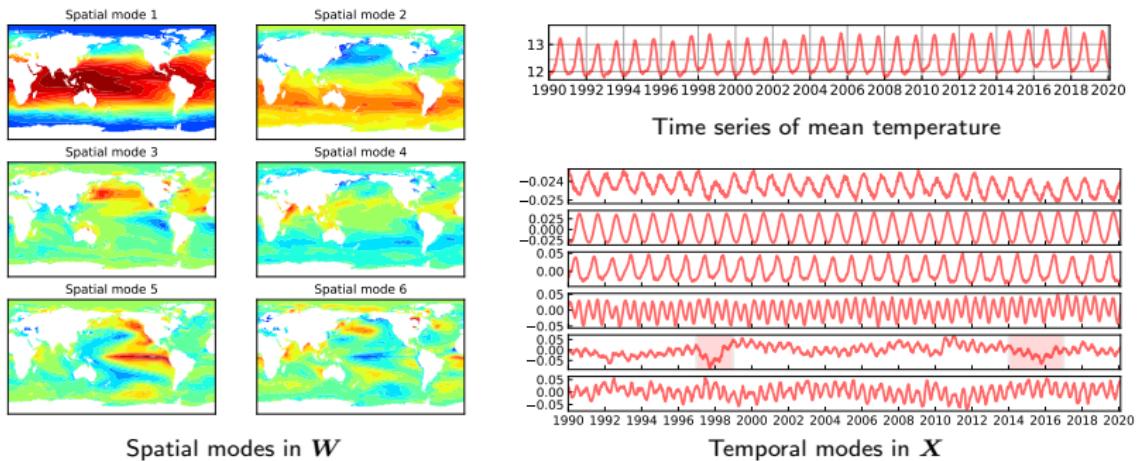

- Identify two strongest El Nino events (on 1997-98 & 2014-16).

Laplacian Convolutional Representation

Reformulate Laplacian regularization with circular convolution.

- Intuition of (circulant) Laplacian matrix.

The diagram illustrates the mapping between a graph and its corresponding matrix. On the left, an "Undirected and circulant graph" is shown with five nodes labeled x_1 , x_2 , x_3 , x_4 , and x_5 . Edges connect x_1 to x_2 and x_3 , x_2 to x_1 and x_3 , x_3 to x_2 and x_4 , x_4 to x_3 and x_5 , and x_5 to x_4 . An arrow labeled "Modeling" points to the right. On the right, the "(Circulant) Laplacian matrix" is given as:

$$\mathbf{L} = \begin{bmatrix} 2 & -1 & 0 & 0 & -1 \\ -1 & 2 & -1 & 0 & 0 \\ 0 & -1 & 2 & -1 & 0 \\ 0 & 0 & -1 & 2 & -1 \\ -1 & 0 & 0 & -1 & 2 \end{bmatrix}$$

- Laplacian kernel: $\ell = (2, -1, 0, 0, -1)^\top$.
- Define Laplacian kernel:

$$\ell \triangleq (\underbrace{2\tau}_{\text{degree}}, \underbrace{-1, \dots, -1}_\tau, 0, \dots, 0, \underbrace{-1, \dots, -1}_\tau)^\top \in \mathbb{R}^T$$

for any time series $\mathbf{x} = (x_1, \dots, x_T)^\top \in \mathbb{R}^T$.

- Local trend modeling via (Laplacian) temporal regularization:

$$\mathcal{R}_\tau(\mathbf{x}) = \frac{1}{2} \|\mathbf{L}\mathbf{x}\|_2^2 = \frac{1}{2} \|\ell \star \mathbf{x}\|_2^2 = \frac{1}{2T} \|\mathcal{F}(\ell) \circ \mathcal{F}(\mathbf{x})\|_2^2$$


Laplacian Convolutional Representation

Laplacian Convolutional Representation (LCR)

For any partially observed time series $\mathbf{y} \in \mathbb{R}^T$ with observed index set Ω , LCR utilizes circulant matrix and Laplacian kernel to characterize **global and local trends** in time series, respectively, i.e.,

$$\begin{aligned} & \min_{\mathbf{x}} \|\mathcal{C}(\mathbf{x})\|_* + \gamma \cdot \mathcal{R}_\tau(\mathbf{x}) \\ \text{s.t. } & \|\mathcal{P}_\Omega(\mathbf{x} - \mathbf{y})\|_2 \leq \epsilon \end{aligned}$$

where $\mathcal{C} : \mathbb{R}^T \rightarrow \mathbb{R}^{T \times T}$ denotes the circulant operator. $\|\cdot\|_*$ denotes the nuclear norm of matrix, namely, the sum of singular values.

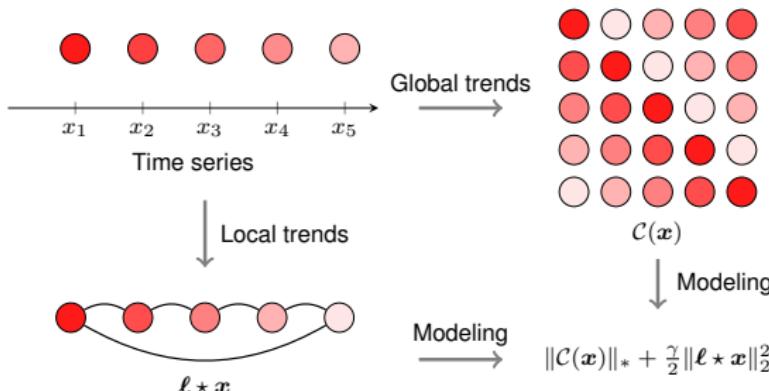

Laplacian Convolutional Representation

- LCR model:

$$\begin{aligned} \min_{\mathbf{x}} \quad & \|\mathcal{C}(\mathbf{x})\|_* + \gamma \cdot \mathcal{R}_\tau(\mathbf{x}) \\ \text{s.t.} \quad & \|\mathcal{P}_\Omega(\mathbf{x} - \mathbf{y})\|_2 \leq \epsilon \end{aligned}$$

- Augmented Lagrangian function:

$$\mathcal{L}(\mathbf{x}, \mathbf{z}, \mathbf{w}) = \|\mathcal{C}(\mathbf{x})\|_* + \frac{\gamma}{2} \|\ell * \mathbf{x}\|_2^2 + \frac{\lambda}{2} \|\mathbf{x} - \mathbf{z}\|_2^2 + \langle \mathbf{w}, \mathbf{x} - \mathbf{z} \rangle + \frac{\eta}{2} \|\mathcal{P}_\Omega(\mathbf{z} - \mathbf{y})\|_2^2$$

where $\mathbf{w} \in \mathbb{R}^T$ is the Lagrange multiplier, and $\langle \cdot, \cdot \rangle$ denotes the inner product.

- The ADMM scheme:

$$\left\{ \begin{array}{l} \mathbf{x} := \arg \min_{\mathbf{x}} \mathcal{L}(\mathbf{x}, \mathbf{z}, \mathbf{w}) \\ \mathbf{z} := \arg \min_{\mathbf{z}} \mathcal{L}(\mathbf{x}, \mathbf{z}, \mathbf{w}) \\ = \frac{1}{\lambda + \eta} \mathcal{P}_\Omega(\lambda \mathbf{x} + \mathbf{w} + \eta \mathbf{y}) + \frac{1}{\lambda} \mathcal{P}_\Omega^\perp(\lambda \mathbf{x} + \mathbf{w}) \\ \mathbf{w} := \mathbf{w} + \lambda(\mathbf{x} - \mathbf{z}) \end{array} \right.$$

Laplacian Convolutional Representation

- Optimize \mathbf{x} via fast Fourier transform (in $\mathcal{O}(T \log T)$ time):

$$\begin{aligned}\mathbf{x} &:= \arg \min_{\mathbf{x}} \|\mathbf{C}(\mathbf{x})\|_* + \frac{\gamma}{2} \|\ell * \mathbf{x}\|_2^2 + \frac{\lambda}{2} \|\mathbf{x} - \mathbf{z} + \mathbf{w}/\lambda\|_2^2 \\ \implies \hat{\mathbf{x}} &:= \arg \min_{\hat{\mathbf{x}}} \|\hat{\mathbf{x}}\|_1 + \frac{\gamma}{2T} \|\hat{\ell} \circ \hat{\mathbf{x}}\|_2^2 + \frac{\lambda}{2T} \|\hat{\mathbf{x}} - \hat{\mathbf{z}} + \hat{\mathbf{w}}/\lambda\|_2^2 \\ &= \arg \min_{\hat{\mathbf{x}}} \|\hat{\mathbf{x}}\|_1 + \frac{\lambda}{2T} \|\hat{\mathbf{x}} - (\lambda \hat{\mathbf{z}} - \hat{\mathbf{w}}) \oslash (\gamma \hat{\ell}^* \circ \hat{\ell} + \lambda \mathbb{1}_T)\|_2^2\end{aligned}$$

where we introduce $\{\hat{\ell}, \hat{\mathbf{x}}, \hat{\mathbf{z}}, \hat{\mathbf{w}}\}$ referring to $\{\ell, \mathbf{x}, \mathbf{z}, \mathbf{w}\}$ in the frequency domain.


ℓ_1 -norm Minimization in Complex Space (Liu & Zhang'23)

For any optimization problem in the form of ℓ_1 -norm minimization in complex space:

$$\min_{\hat{\mathbf{x}}} \|\hat{\mathbf{x}}\|_1 + \frac{\lambda}{2T} \|\hat{\mathbf{x}} - \hat{\mathbf{h}}\|_2^2$$

with complex-valued $\hat{\mathbf{x}}, \hat{\mathbf{h}} \in \mathbb{C}^T$, element-wise, the solution is given by


$$\hat{x}_t := \frac{\hat{h}_t}{|\hat{h}_t|} \cdot \max\{0, |\hat{h}_t| - T/\lambda\}, t = 1, \dots, T.$$

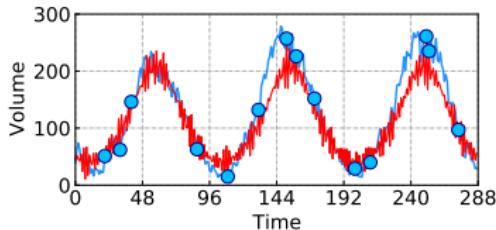

CircNNM:

$$\begin{aligned} & \min_{\boldsymbol{x}} \|\mathcal{C}(\boldsymbol{x})\|_* \\ \text{s. t. } & \|\mathcal{P}_\Omega(\boldsymbol{x} - \boldsymbol{y})\|_2 \leq \epsilon \end{aligned}$$

↓ Plus temporal regularization (TR)

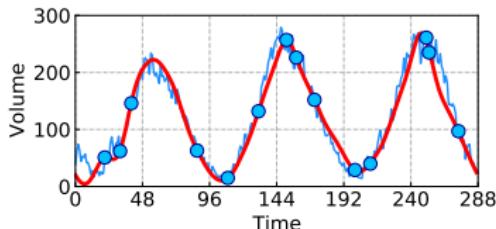

LCR:

$$\begin{aligned} & \min_{\boldsymbol{x}} \|\mathcal{C}(\boldsymbol{x})\|_* + \frac{\gamma}{2} \|\boldsymbol{\ell} * \boldsymbol{x}\|_2^2 \\ \text{s. t. } & \|\mathcal{P}_\Omega(\boldsymbol{x} - \boldsymbol{y})\|_2 \leq \epsilon \end{aligned}$$

Hankel Tensor Factorization

- Hankel matrix

- Given $\mathbf{y} = (1, 2, 3, 4, 5)^\top$ and window length $\tau = 2$, we have

$$\mathcal{H}_\tau(\mathbf{y}) = \begin{bmatrix} 1 & 2 \\ 2 & 3 \\ 3 & 4 \\ 4 & 5 \end{bmatrix} \in \mathbb{R}^{4 \times 2}$$

- On time series $\mathbf{y} = (y_1, y_2, \dots, y_5)^\top$ with $\tau = 2$:


$$\mathcal{H}_\tau(\mathbf{y}) = \begin{bmatrix} y_1 & y_2 \\ y_2 & y_3 \\ y_3 & y_4 \\ y_4 & y_5 \end{bmatrix} \approx \begin{bmatrix} v_1 \\ v_2 \\ v_3 \\ v_4 \end{bmatrix} \otimes \begin{bmatrix} x_1 \\ x_2 \end{bmatrix}$$

$$\Rightarrow \hat{\mathbf{y}} = \begin{bmatrix} \hat{y}_1 \\ \hat{y}_2 \\ \hat{y}_3 \\ \hat{y}_4 \\ \hat{y}_5 \end{bmatrix} = \mathcal{H}_\tau^{-1} \left(\begin{bmatrix} v_1 x_1 & v_1 x_2 \\ v_2 x_1 & v_2 x_2 \\ v_3 x_1 & v_3 x_2 \\ v_4 x_1 & v_4 x_2 \end{bmatrix} \right) = \begin{bmatrix} v_1 x_1 \\ (v_1 x_2 + v_2 x_1)/2 \\ (v_2 x_2 + v_3 x_1)/2 \\ (v_3 x_2 + v_4 x_1)/2 \\ v_4 x_2 \end{bmatrix}$$

- Automatic temporal modeling.

Hankel Tensor Factorization

- Hankelization from $\mathbf{X} \in \mathbb{R}^{N \times T}$ to $\mathcal{X} \triangleq \mathcal{H}_{\tau_1, \tau_2}(\mathbf{X})$ (Hankel tensor).
 - Tensor size: $(N - \tau_1 + 1) \times \tau_1 \times (T - \tau_2 + 1) \times \tau_2$;
 - Slice: $\mathcal{X}_{:, k_1, :, k_2}, \forall k_1, k_2$;
 - Slice size: $(N - \tau_1 + 1) \times (T - \tau_2 + 1)$.

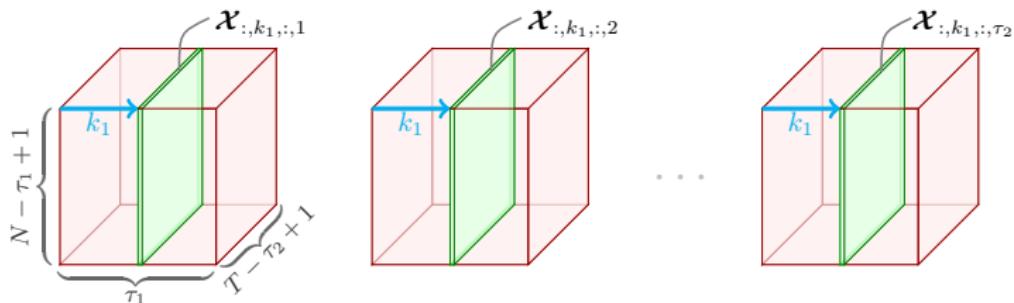

Hankel Tensor Factorization


Hankel Tensor Factorization

- HTF optimization problem


$$\min_{\mathbf{Q}, \mathbf{S}, \mathbf{U}, \mathbf{V}} \frac{1}{2} \left\| \mathcal{P}_{\dot{\Omega}} \left(\mathcal{H}_{\tau_1, \tau_2}(\mathbf{Y}) - \sum_{r=1}^R \mathbf{q}_r \otimes \mathbf{s}_r \otimes \mathbf{u}_r \otimes \mathbf{v}_r \right) \right\|_F^2$$

- Speed field reconstruction

- Set rank $R = 10$;
- Recall that SMF: MAPE = 48.00% & RMSE = 1.60mph.

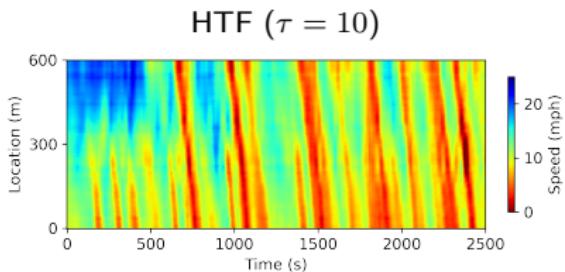


MAPE = 41.40%, RMSE = 1.42mph

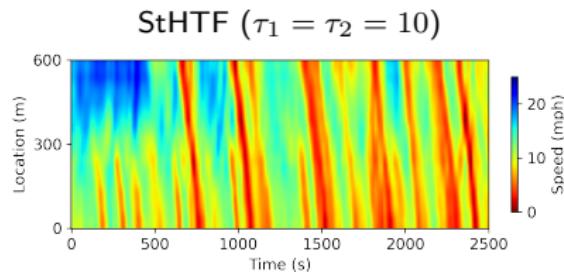


MAPE = 41.58%, RMSE = 1.39mph

Hankel Tensor Factorization


Which Model Is Better?

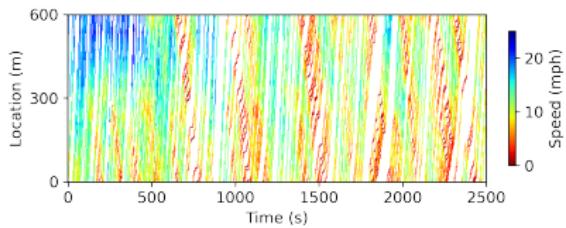


Sparse speed field

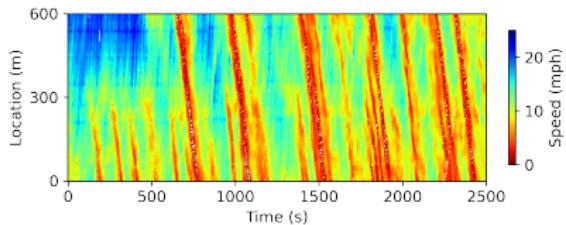


Ground truth speed field

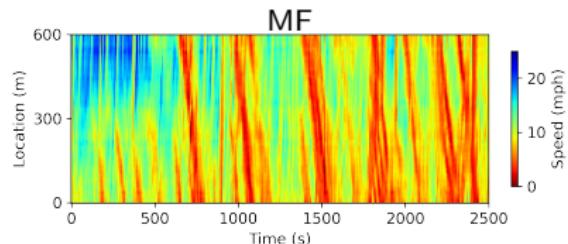

MF

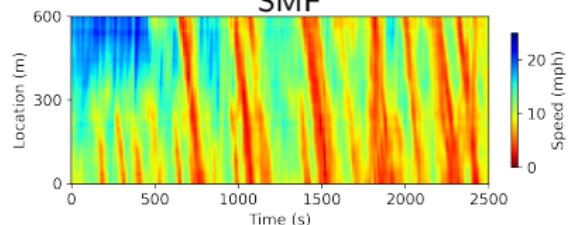

SMF

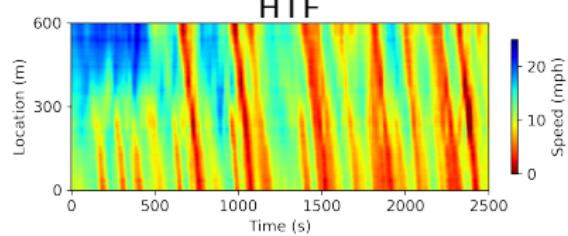

HTF

Conclusion



POLYTECHNIQUE
MONTRÉAL

UNIVERSITÉ
D'INGÉNIERIE



Thanks for your attention!

Any Questions?

About me:

- 🏠 Homepage: <https://xinychen.github.io>
- 👤 GitHub: <https://github.com/xinychen> (3.4k+ stars)
- 💻 Blog: <https://medium.com/@xinyu.chen> (70k+ views)
- ✉️ How to reach me: chenxy346@gmail.com