



MENS  
MANUS AND  
MACHINA

# Quantifying Time Series Periodicity with Interpretable Machine Learning

Climate Systems & Human Mobility & Wikipedia

**Xinyu Chen**

Postdoctoral Associate, MIT

December 12, 2025

Cambridge, USA

# Spatiotemporal Time Series Data

- Transport & mobility & climate application scenarios




Highway (Portland)




Uber movement (NYC)




Uber movement (Seattle)



Taxi trajectory (Shenzhen)



Temperature (NA)





Temperature (sea surface)

- Challenges: Sparsity, high-dimensionality, multi-dimensionality, heavy tails, irregular sampling, and time-varying systems

# Motivation

Yearly temperature seasonality patterns in 2010s

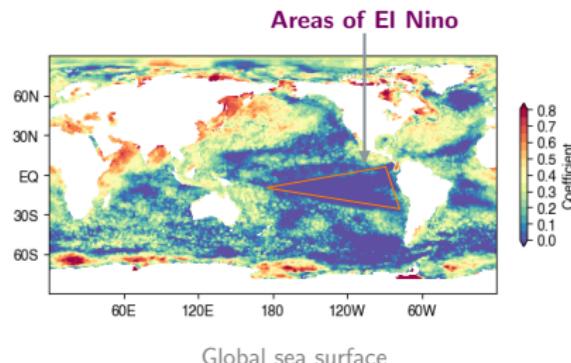
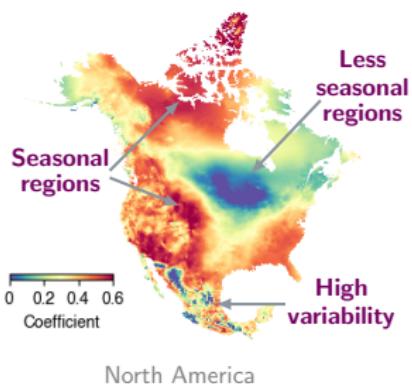


What motivates us most about periodicity?

- ① **Monitoring climate systems:** Empirically measure the periodicity of climate variables (e.g., temperature, precipitation).
- ② **Discovering spatiotemporal patterns:** Identify periodicity pattern shift and special climate events.

# Motivation

## Ridehailing trip data

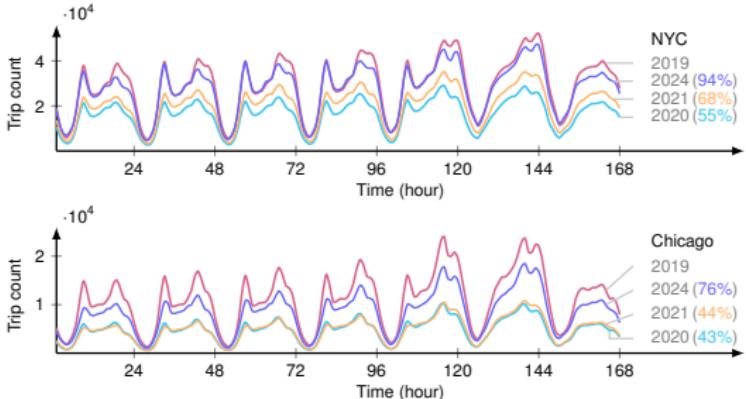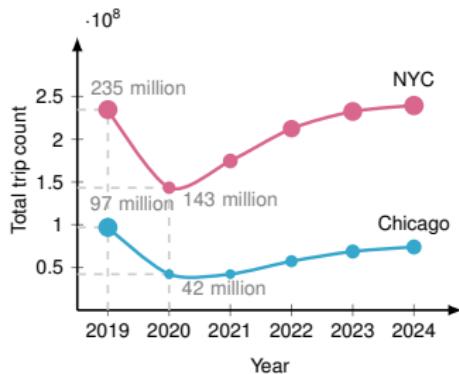

## What motivate us most about periodicity?

- ① Resilience and stability of systems:** Empirically measure the periodicity and predictability of urban systems.
- ② Optimization of transport systems:** Optimize resources (e.g., public transit, taxi, ridehailing, micromobility) to meet transport demand efficiently.
- ③ Design of sustainable transport & infrastructure:** Implement energy-efficient solutions (e.g., congestion pricing) tailored to peak hours.



## Interpretable Time Series Autoregression




<https://github.com/xinychen/integers>

- Interpretable ML
- $\ell_0$ -norm optimization
- Climate system seasonality
- Sparse autoregression
- Mixed-integer programming
- Human mobility regularity

# Valorizing Autoregression

- Time series autoregression on  $\mathbf{x} \in \mathbb{R}^T$  with order  $d \in \mathbb{Z}^+$

$$\mathbf{w} := \arg \min_{\mathbf{w}} \sum_{t=d+1}^T \left( \mathbf{x}_t - \sum_{k=1}^d w_k \mathbf{x}_{t-k} \right)^2$$

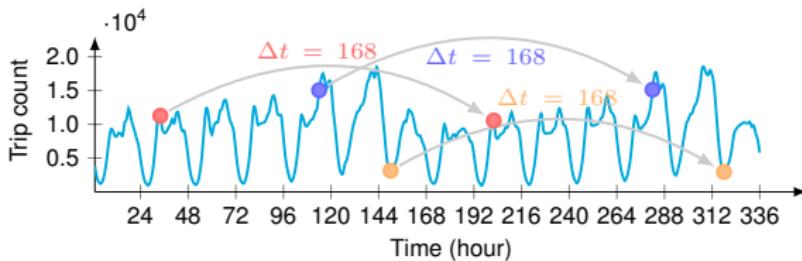

Periodicity of hourly rideshare trip time series

- Sparse** coefficient vector  $\mapsto$  **Interpretability?**

$$\underbrace{\mathbf{w}}_{\text{sparsity } \|\mathbf{w}\|_0 \triangleq 3} = (\underbrace{0.33}_{k=1}, 0, \dots, 0, \underbrace{0.20}_{k=167}, \underbrace{0.46}_{k=168})^\top \in \mathbb{R}^{168}$$

# Sparse Autoregression


- Identify the dominant auto-correlations
  - $\tau \in \mathbb{Z}^+$ : Upper bound of the number of nonzero entries in  $w \in \mathbb{R}^d$

$$\tilde{x} \approx A \begin{pmatrix} w_1 \\ w_2 \\ w_3 \\ w_4 \end{pmatrix} \quad \left\{ \begin{array}{l} w := \arg \min_{\|w\|_0 \leq \tau} \sum_{t=d+1}^T \left( x_t - \sum_{k=1}^d w_k x_{t-k} \right)^2 \\ = \arg \min_{\|w\|_0 \leq \tau} \|\tilde{x} - Aw\|_2^2 \end{array} \right.$$

- $\ell_0$ -norm optimization is NP-hard
- Formulate it as a mixed-integer programming
  - Introduce binary decision variables  $\beta \in \{0, 1\}^d$

$$\begin{aligned} \min_w \|\tilde{x} - Aw\|_2^2 &\iff \min_{w, \beta} \|\tilde{x} - Aw\|_2^2 \\ \text{s.t. } \underbrace{\|w\|_0 \leq \tau}_{\clubsuit \text{ sparsity of } w} &\iff \text{s.t. } \underbrace{-\beta \leq w \leq \beta}_{\text{bounds being either 0 or } \pm 1}, \underbrace{\|\beta\|_1 \leq \tau}_{\clubsuit \text{ sparsity of } \beta} \end{aligned}$$

# $\ell_0$ -Norm Optimization

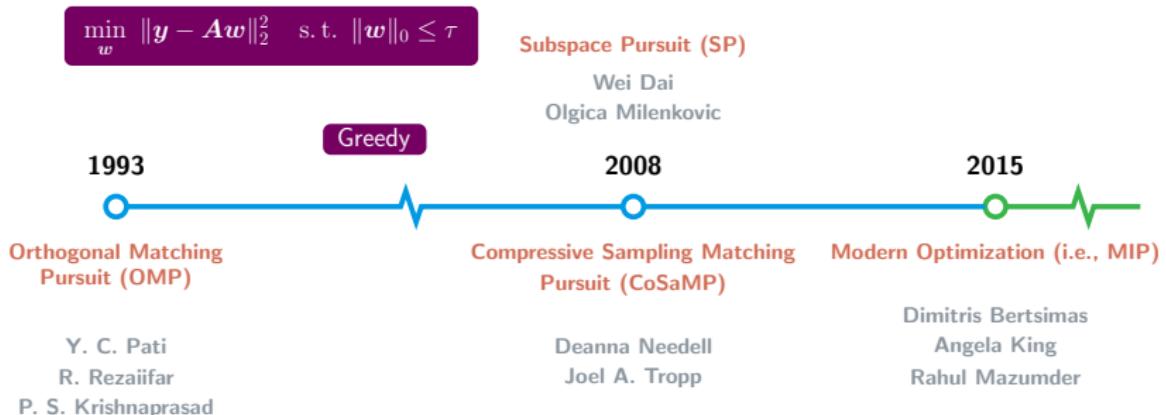

# Sparse Autoregression Done Right

$$\min_{\mathbf{w}, \boldsymbol{\beta}} \underbrace{\sum_{t=d+1}^T \left( x_t - \sum_{k=1}^d w_k x_{t-k} \right)^2}_{\text{Time series autoregression}} \quad \text{s.t. } \underbrace{-\beta_k \leq w_k \leq \beta_k}_{\text{Lower and upper bounds}}, \quad \underbrace{\sum_{k=1}^d \beta_k \leq \tau}_{\clubsuit \text{ Sparsity}} , \quad \underbrace{\beta_k \in \{0, 1\}}_{\text{Binary variable}}$$


- $\mathbf{w} \in \mathbb{R}^d$ : Auto-correlations
- $\boldsymbol{\beta} \in \{0, 1\}^d$ : Sparsity pattern
- $d = 168$ : Autoregression order

```

1 import numpy as np
2 from docplex.mp.model import Model
3
4 def sparse_ar(x, d, tau):
5     model = Model('Sparse Autoregression')
6     T = x.shape[0]
7     w = [model.continuous_var(name = f'w_{k}') for k in range(d)]
8     beta = [model.binary_var(name = f'beta_{k}') for k in range(d)]
9     model.minimize(model.sum((x[t] - model.sum(w[k] * x[t - k - 1]
10                                for k in range(d))) ** 2
11                                for t in range(d, T)))
12     model.add_constraint(model.sum(beta[k] for k in range(d)) <= tau)
13     for k in range(d):
14         model.add_constraint(w[k] <= beta[k])
15         model.add_constraint(w[k] >= -beta[k])
16     solution = model.solve()
17     return np.array(solution.get_values(w))

```

<https://github.com/xinychen/integers>

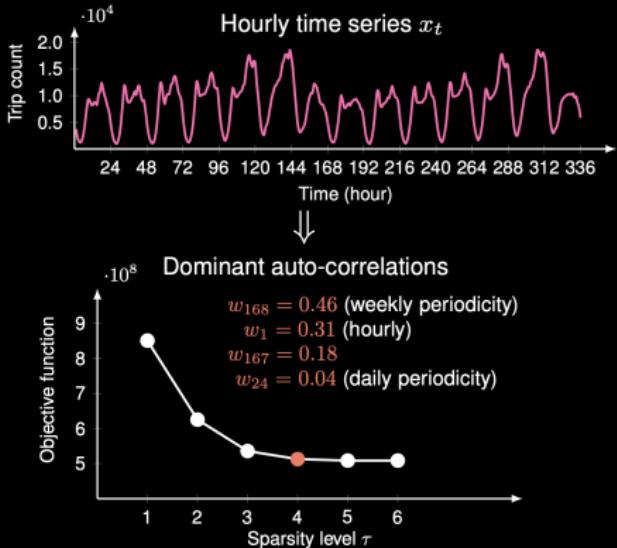


## Solution Quality → Better Interpretability?

- Sparse autoregression

$$\min_{\mathbf{w} \geq 0} \|\tilde{\mathbf{x}} - \mathbf{A}\mathbf{w}\|_2^2 \quad \text{s.t. } \|\mathbf{w}\|_0 \leq \tau$$

- Subspace pursuit (SP) sometimes fails

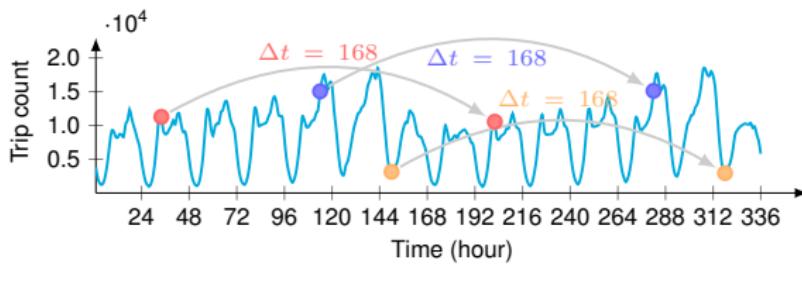



Periodicity of ridehailing trip time series

- Exact solution w/ mixed-integer programming (MIP)
- An intuitive example (sparsity  $\tau = 2$ ):



$$\underbrace{\mathbf{w} = (\cdots, \underbrace{0.02}_{k=53}, \cdots, \underbrace{0.96}_{k=168})^\top}_{\text{obj. } = 8.32 \times 10^7 \text{ (SP)}} \quad \text{vs.} \quad \underbrace{\mathbf{w} = (\underbrace{0.22}_{k=1}, \cdots, \underbrace{0.77}_{k=168})^\top}_{\clubsuit \text{ obj. } = 6.25 \times 10^7 \text{ (MIP)}}$$

# John F. Kennedy International Airport

- Daily & weekly periodicity: **dropoff > pickup** trips at JFK airport
  - Pickup trips are relevant to flight delay, baggage claim, and other factors.
  - Dropoff trips to airport are highly related to flight schedules.

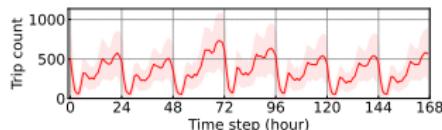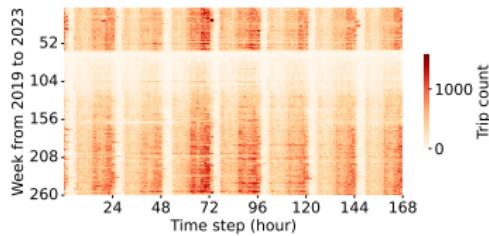

Pickup trips from airport

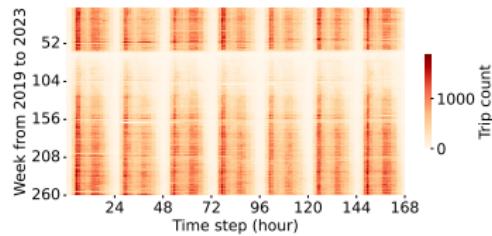

Dropoff trips to airport

- Sparse coefficient vectors (**sparsity  $\tau = 3$** ):

$$\mathbf{w} = (\underbrace{0.31}_{k=1}, \dots, \underbrace{0.28}_{k=24}, \dots, \underbrace{0.41}_{k=168})^\top \quad \text{vs.} \quad \mathbf{w} = (\underbrace{0.18}_{k=1}, \dots, \underbrace{0.35}_{k=24}, \dots, \underbrace{0.47}_{k=168})^\top$$

## High-Dimensional Sparse Autoregression

- On high-dimensional time series with a large  $N$ :

$$\begin{aligned} & \underbrace{\min_{\{\boldsymbol{w}_n\}_{n=1}^N, \boldsymbol{\beta}}}_{(N+1)d \text{ decision var.}} \quad \underbrace{\sum_{n=1}^N \|\tilde{\boldsymbol{x}}_n - \boldsymbol{A}_n \boldsymbol{w}_n\|_2^2}_{\text{multivariate time series}} \\ \text{s.t.} \quad & \underbrace{0 \leq \boldsymbol{w}_n \leq \boldsymbol{\beta},}_{\text{bounds being either 0 or 1}} \quad \underbrace{\|\boldsymbol{\beta}\|_1 \leq \tau,}_{\text{sparsity of } \boldsymbol{\beta}} \quad \boldsymbol{\beta} \in \{0, 1\}^d \end{aligned}$$

- How to handle millions of time series (e.g.,  $N \geq 10^6$ )?

# High-Dimensional Sparse Autoregression

- On high-dimensional time series with a large  $N$ :

$$\begin{aligned}
 & \underbrace{\min_{\{\mathbf{w}_n\}_{n=1}^N, \boldsymbol{\beta}}}_{(N+1)d \text{ decision var.}} \quad \underbrace{\sum_{n=1}^N \|\tilde{\mathbf{x}}_n - \mathbf{A}_n \mathbf{w}_n\|_2^2}_{\text{multivariate time series}} \\
 & \text{s.t.} \quad \underbrace{0 \leq \mathbf{w}_n \leq \boldsymbol{\beta},}_{\text{bounds being either 0 or 1}} \quad \underbrace{\|\boldsymbol{\beta}\|_1 \leq \tau,}_{\text{sparsity of } \boldsymbol{\beta}} \quad \boldsymbol{\beta} \in \{0, 1\}^d
 \end{aligned}$$

- How to handle millions of time series (e.g.,  $N \geq 10^6$ )?
- Two-stage optimization (♣):


① Learn sparsity patterns in  $\boldsymbol{\beta} \in \{0, 1\}^d$

$$\min_{\mathbf{w}, \boldsymbol{\beta}} \underbrace{\text{tr}(\mathbf{w} \mathbf{w}^\top \mathbf{P})}_{\text{quadratic}} - \underbrace{2 \mathbf{w}^\top \mathbf{q}}_{\text{linear}}$$

$$\text{s.t. } 0 \leq \mathbf{w} \leq \boldsymbol{\beta}, \quad \|\boldsymbol{\beta}\|_1 \leq \tau$$

② Quadratic programming with index set  $\Omega = \text{supp}(\boldsymbol{\beta})$


$$\mathbf{w}_n := \arg \min_{\mathbf{w} \geq 0} \|\tilde{\mathbf{x}}_n - \mathbf{A}_n \mathbf{w}\|_2^2 \quad \text{s.t. } w_k = 0, \forall k \notin \Omega$$

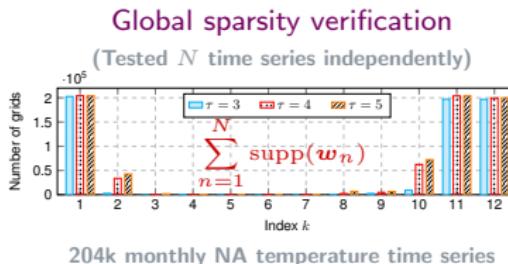

# Climate Seasonality Patterns

(arXiv:2506.22895)


- North America temperature
- Climate variable seasonality
- Sea surface temperature
- Spatiotemporal patterns



Xinyu Chen  
MIT



Vassilis Digalakis Jr.  
BU



Lijun Ding  
UCSD



Dingyi Zhuang  
MIT



Jinhua Zhao  
MIT

# Understanding Climate Systems


Quantify yearly seasonality by  $\{w_{m,n,\gamma,k}\}$  at index  $k = 12$

$$\min_{\{\mathbf{w}_{m,n,\gamma}\}, \boldsymbol{\beta}} \sum_{m=1}^M \sum_{n=1}^N \sum_{\gamma=1}^{\delta} \|\tilde{\mathbf{x}}_{m,n,\gamma} - \mathbf{A}_{m,n,\gamma} \mathbf{w}_{m,n,\gamma}\|_2^2$$

longitude  
latitude | decade      monthly  
          ↓        ↓        ↓      temperature


s.t.  $0 \leq \mathbf{w}_{m,n,\gamma} \leq \boldsymbol{\beta}$       sparsity constraint  
 $\|\boldsymbol{\beta}\|_1 \leq \tau$   
 $\boldsymbol{\beta} \in \{0, 1\}^d$       binary decision var.

## North America Temperature

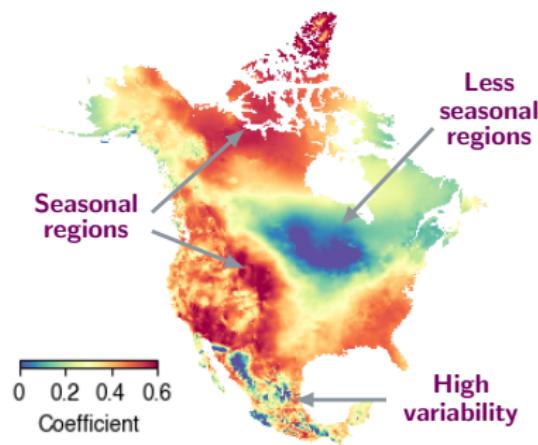

Yearly temperature **seasonality** pattern in 2010s


# North America Temperature

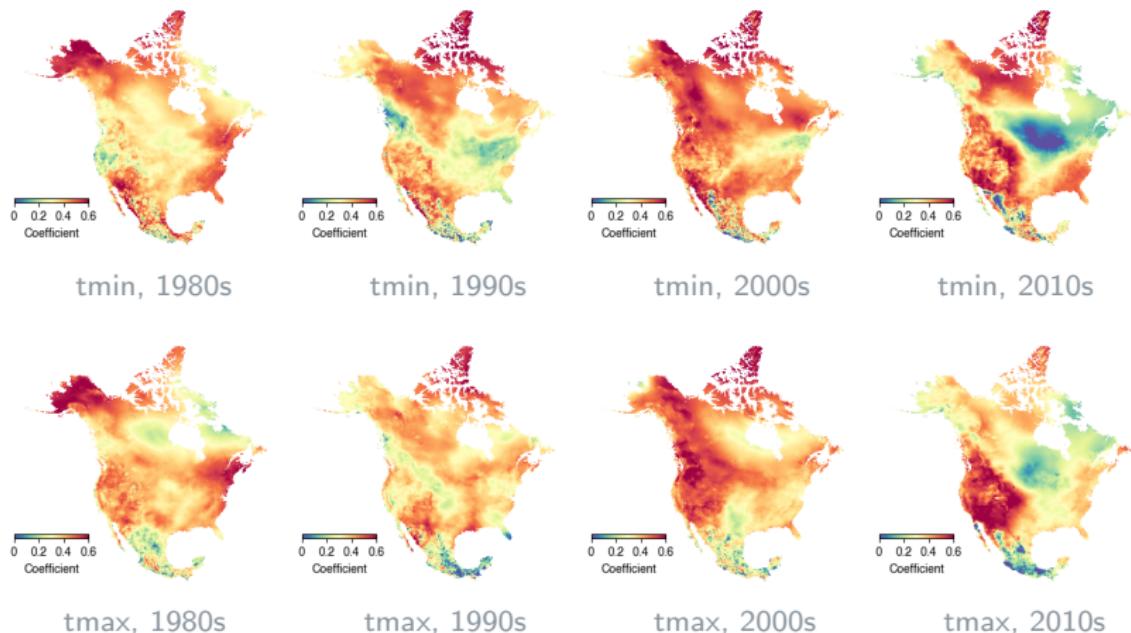

- Identify yearly periodicity at  $k = 12$  from temperature data ( $\tau = 3$ )
  - ❶ Stronger yearly seasonality in high-latitude areas
  - ❷ Less seasonal temperature in south areas (e.g., Mexico)
  - ❸ Seasonality patterns in 2000s & 2010s are different from 1980s & 1990s


# North America Precipitation

Yearly seasonality patterns

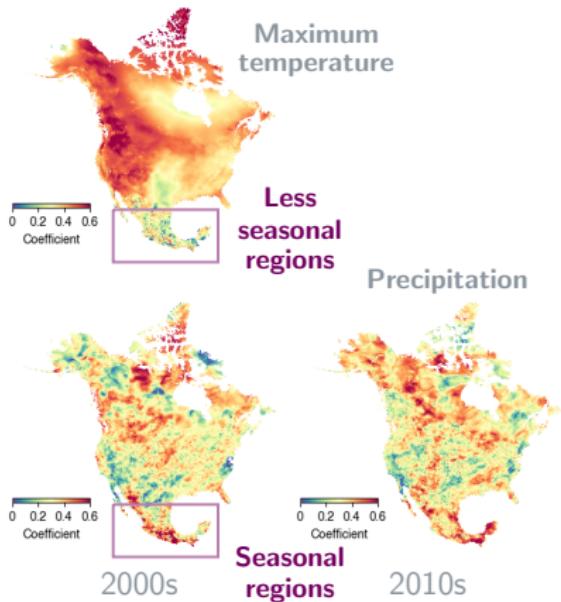


★ Precipitation is **less seasonal** than temperature


# Sea Surface Temperature

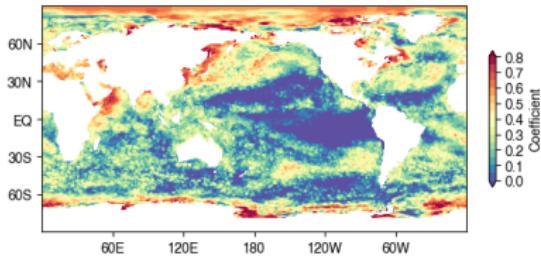


1980s

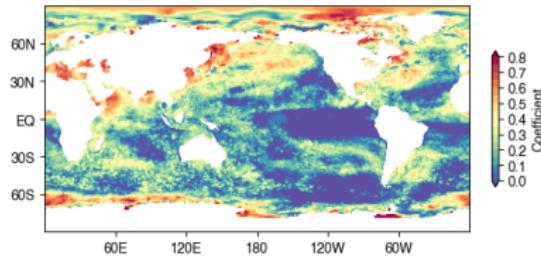

1990s

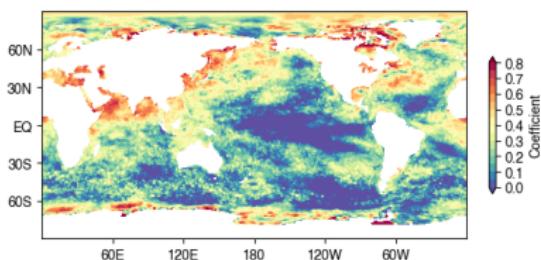

2000s

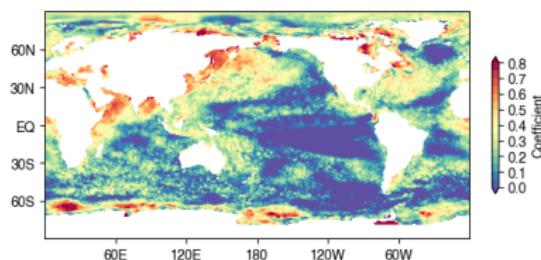

2010s


- Identify yearly periodicity at  $k = 12$  from SST data ( $\tau = 3$ )
  - ➊ The areas of El Nino events are less seasonal/predictable
  - ➋ Arctic becomes less seasonal/predictable in the past 20 years

# Human Mobility Regularity

Applications and Case Studies

(arXiv:2508.03747)

- Daily & weekly periodicity
- NYC & Chicago ridehailing
- Multi-modal mobility
- Network resilience
- Post-pandemic recovery
- Metro passenger flow



Xinyu Chen  
MIT



Qi Wang  
NEU



Yunhan Zheng  
MIT → PKU



Nina Cao  
MIT




HanQin Cai  
UCF



Jinhua Zhao  
MIT

# Envisioning Human Mobility

- Human mobility data

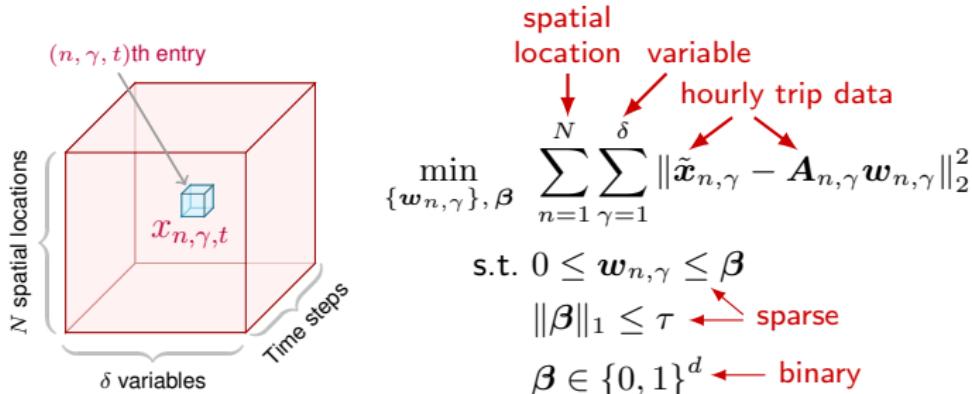

- Quantify **weekly periodicity** by  $\{\mathbf{w}_{n,\gamma,k}\}$  at index  $k = 168$

The diagram illustrates the decomposition of trip data. On the left, a matrix labeled "Trip data at  $t$ " is shown with "N locations" on the vertical axis and "δ variables" on the horizontal axis. It contains a grid of pink circles.


In the middle, the symbol  $\approx$  is followed by a summation expression:  $\sum_{k \in [d]}$ .

On the right, there are two matrices: "Coefficients" (blue circles) and "Trip data at  $t - k$ " (pink circles).

Annotations with arrows show the relationship:

- A blue arrow points from the "Trip data at  $t$ " matrix to the summation symbol.
- A blue arrow points from the "Coefficients" matrix to the summation symbol.
- A blue arrow points from the "Trip data at  $t - k$ " matrix to the summation symbol.


# NYC Ridehailing

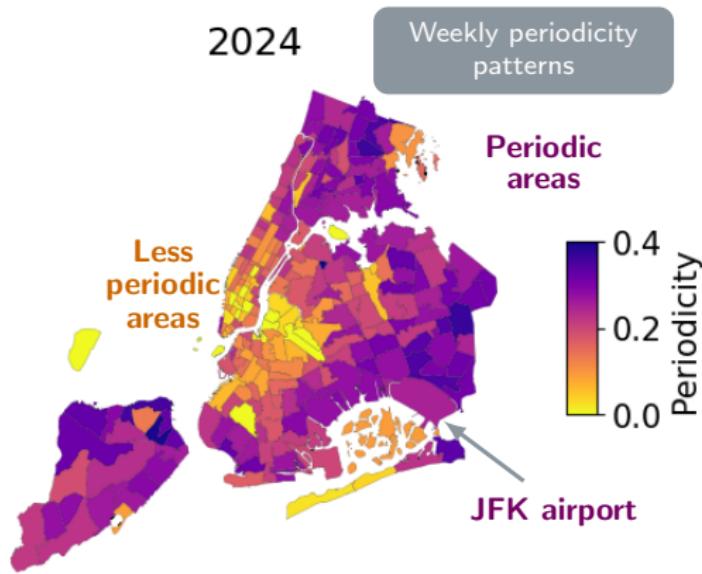

Hourly trip time series of 265 pickup areas


# NYC Ridehailing

## Weekly periodicity patterns

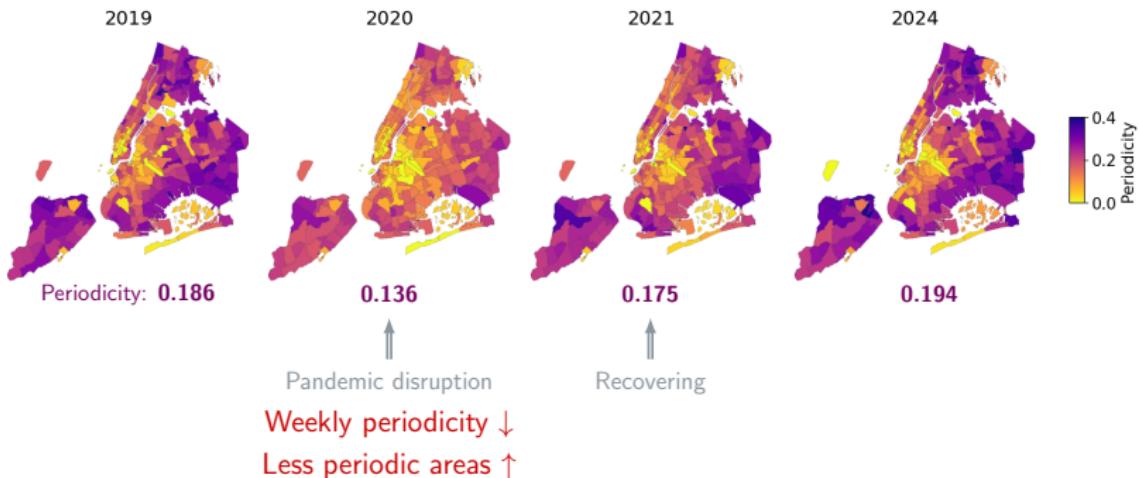

# Chicago Ridehailing


## Weekly periodicity patterns

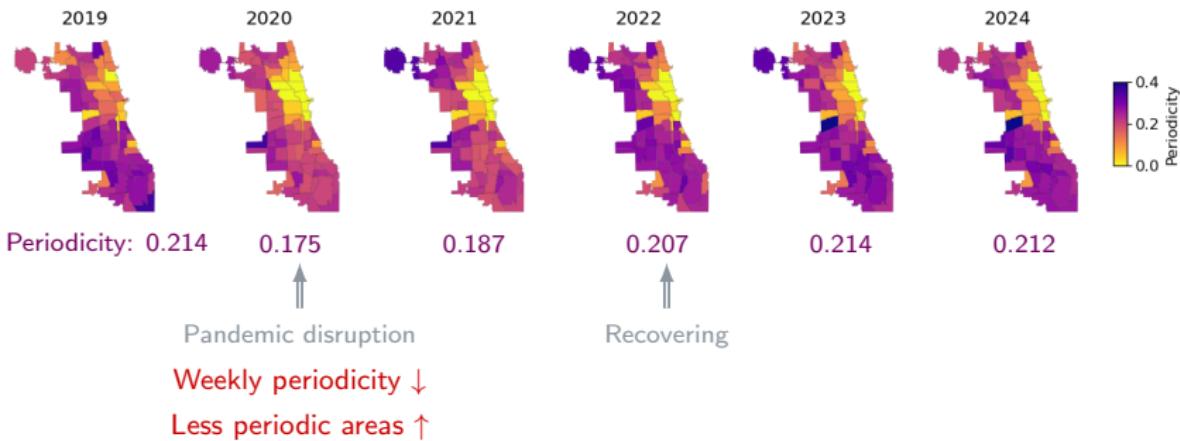

Hourly trip time series of 77 pickup areas

# Post-Pandemic Recovery

2024's periodicity minus 2019's periodicity

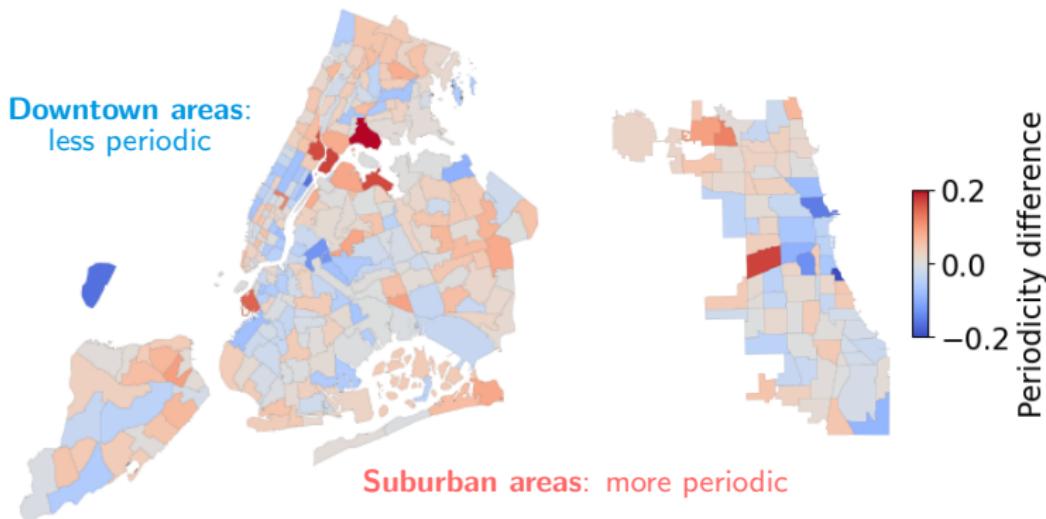

# Weekly Periodicity of Manhattan Mobility

Mobility data of 2024

North areas:

Ridehailing > Yellow taxi

Overall:

Subway > Others



Ridehailing

Yellow taxi


Subway

Bikesharing  
(member)


Bikesharing  
(all)

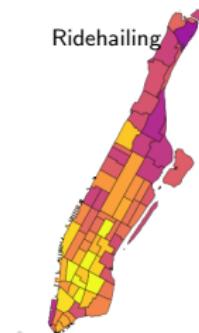


Periodicity: 0.122

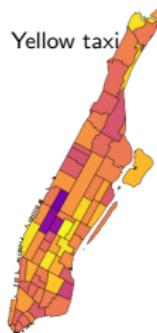


0.120

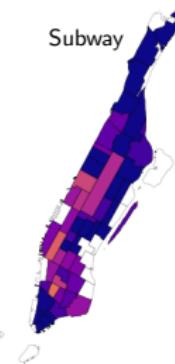

0.363

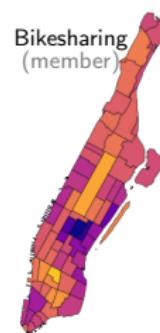

0.191



0.151

South areas:

Yellow taxi > Ridehailing

**Remarkable** weekly periodicity difference  
between membership and all travels

# Daily Periodicity of Manhattan Mobility (Weekdays)


Mobility data of 2024

Overall:

Yellow taxi > Ridehailing


Subway:

North areas > South areas

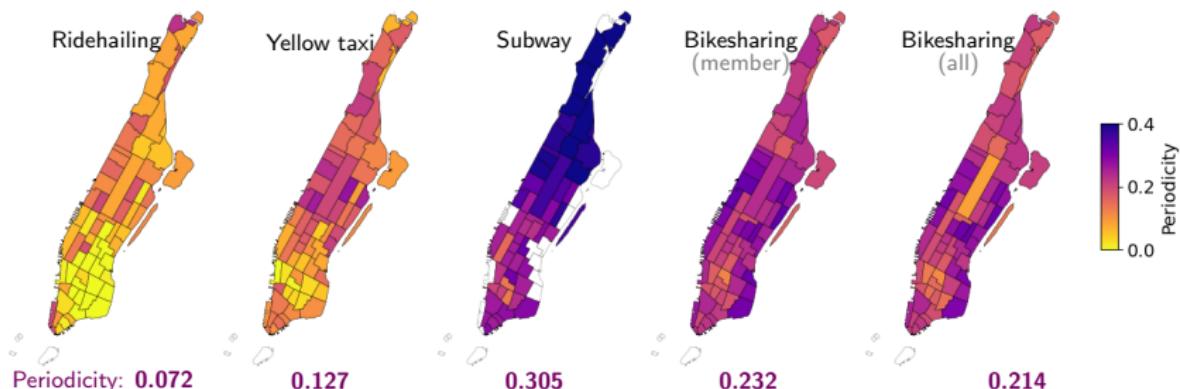


**Marginal** daily periodicity difference  
between membership and all travels


# Hangzhou Metro Passenger Flow

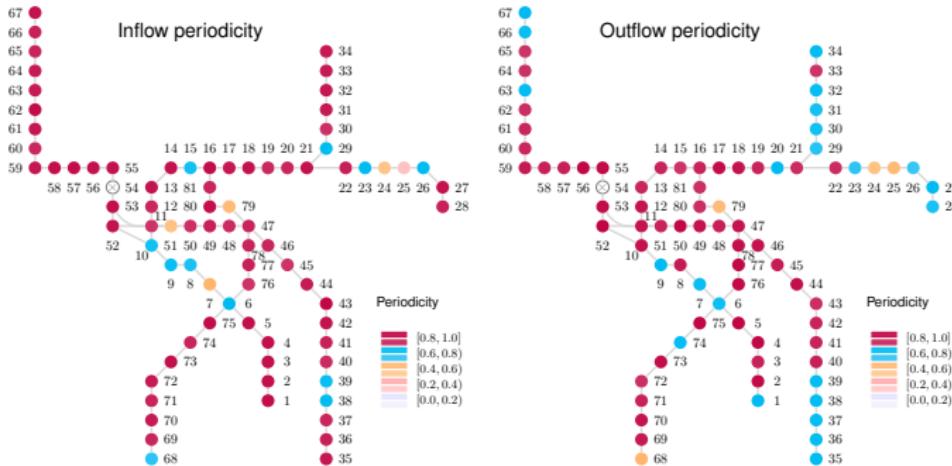

# Hangzhou Metro Passenger Flow

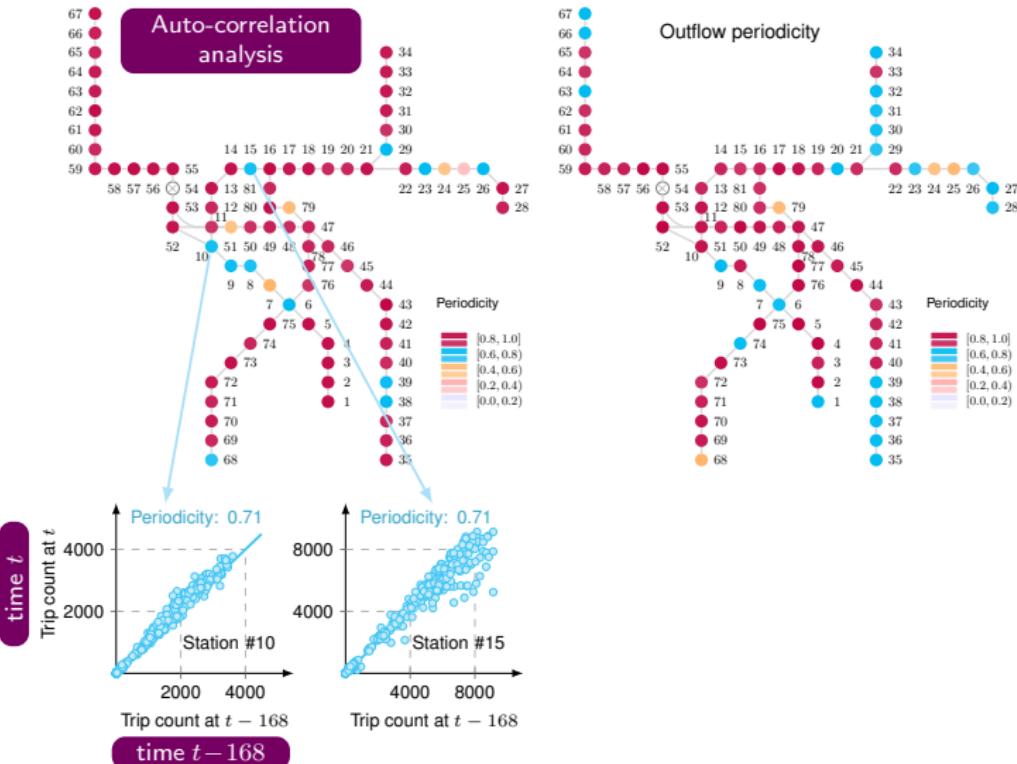

# Hangzhou Metro Passenger Flow

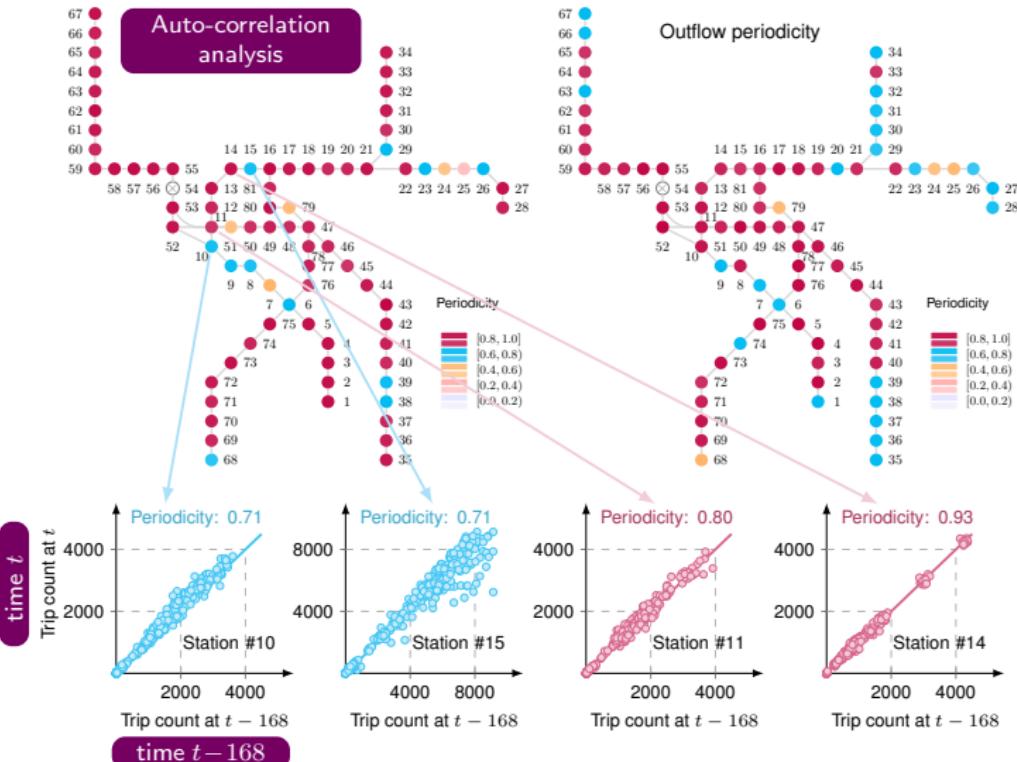

"Closeness" to the anti-diagonal curve  $y = x$

# Wikipedia Page View Seasonality

## Applications and Case Studies



- Digital platform behavior
- Daily & weekly seasonality
- Wikipedia pages
- Hourly page view time series



**Xinyu Chen**  
MIT



**HanQin Cai**  
UCF



**Lijun Sun**  
UCSD




**Jinhu Zhao**  
MIT


# Wikipedia Page View Data (Hourly)

Heavy-tailed data

Most pages have been viewed only once  
Some pages have 1k+ hourly page views

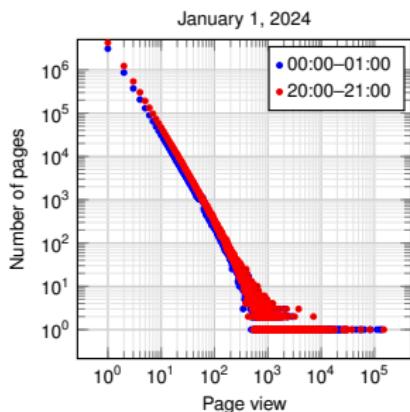

60M → 3M pages  
(72% total page views)

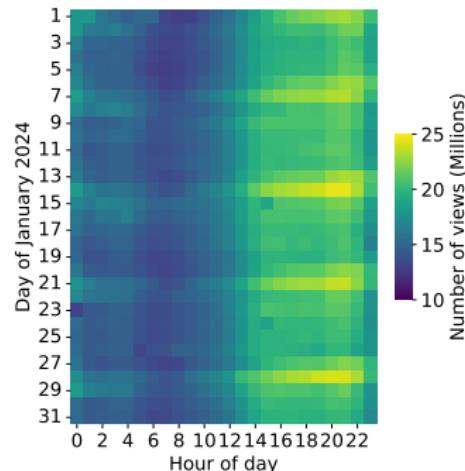


Remarkable weekly seasonality

# Wikipedia Page View Seasonality


## Optimization

$$\begin{aligned} & \min_{\{\boldsymbol{w}_\gamma\}_\gamma, \boldsymbol{\beta}} \sum_\gamma \sum_{i=1}^{n_\gamma} \|\tilde{\boldsymbol{x}}_{i,\gamma} - \boldsymbol{A}_{i,\gamma} \boldsymbol{w}_\gamma\|_2^2 \\ \text{s.t. } & 0 \leq \boldsymbol{w}_\gamma \leq \boldsymbol{\beta}, \quad \|\boldsymbol{\beta}\|_1 \leq \tau, \quad \boldsymbol{\beta} \in \{0, 1\}^d \end{aligned}$$

Monthly page views  $\mathcal{O}(10^2) = [100, 1000)$

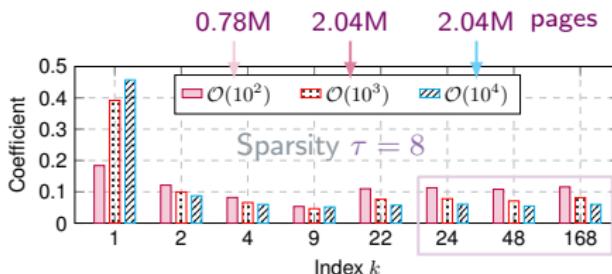

Page views of popular articles are less seasonal




# Wikipedia Page View Seasonality




## Optimization

$$\begin{aligned} & \min_{\{\boldsymbol{w}_\gamma\}_\gamma, \boldsymbol{\beta}} \sum_\gamma \sum_{i=1}^{n_\gamma} \|\tilde{\boldsymbol{x}}_{i,\gamma} - \boldsymbol{A}_{i,\gamma} \boldsymbol{w}_\gamma\|_2^2 \\ \text{s.t. } & 0 \leq \boldsymbol{w}_\gamma \leq \boldsymbol{\beta}, \quad \|\boldsymbol{\beta}\|_1 \leq \tau, \quad \boldsymbol{\beta} \in \{0, 1\}^d \end{aligned}$$

Monthly page views  $\mathcal{O}(10^2) = [100, 1000)$

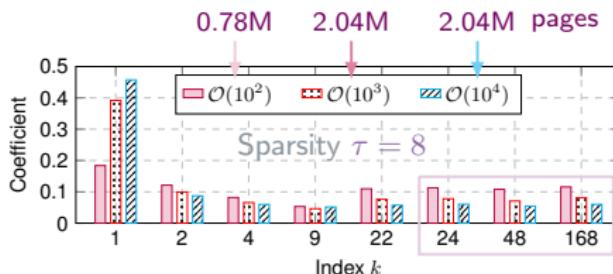

Page views of popular articles are less seasonal

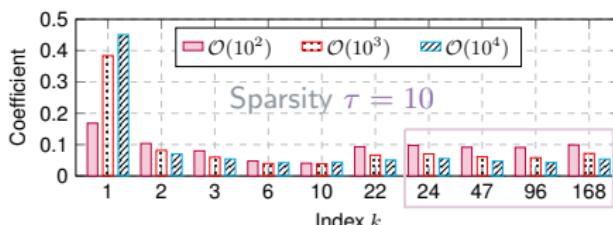



MENS  
MANUS AND  
MACHINA

# Thanks for your attention!

Any Questions?

Slides: <https://xinychen.github.io/slides/intro.pdf>

## About me:

- 🏠 Homepage: <https://xinychen.github.io>
- /github/ GitHub: <https://github.com/xinychen>
- ✉ How to reach me: [xinychen@mit.edu](mailto:xinychen@mit.edu)