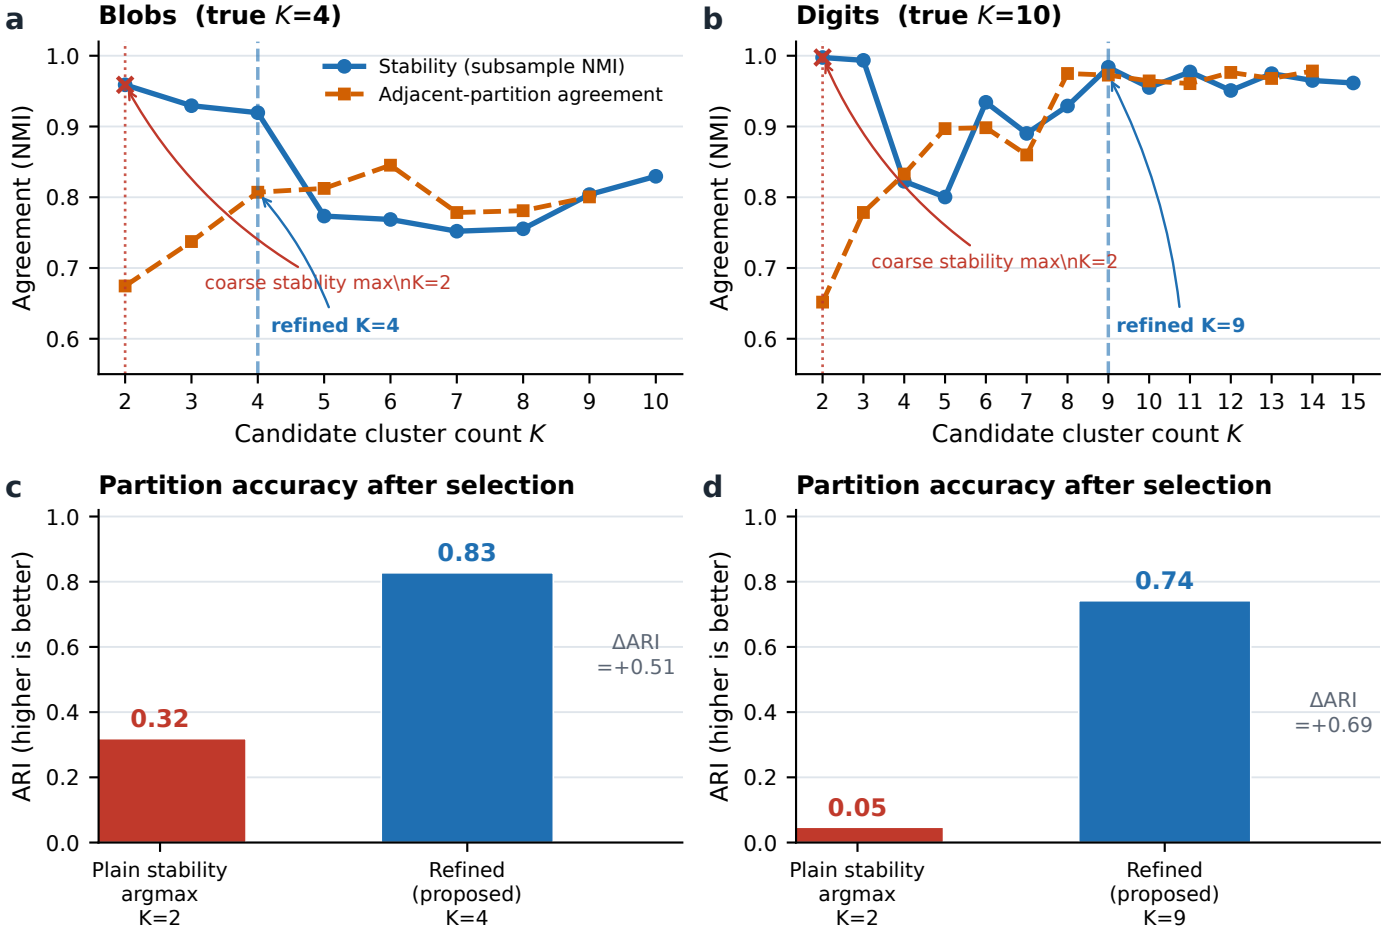
a
Blobs (true K=4)
Stability (subsample NMI)
Adjacent-partition agreement
coarse stability max\nK=2
refined K=4
Agreement (NMI)
Candidate cluster count K
b
Digits (true K=10)
coarse stability max\nK=2
refined K=9
Agreement (NMI)
Candidate cluster count K
c
Partition accuracy after selection
0.32
0.83
ΔARI =+0.51
ARI (higher is better)
Plain stability argmax K=2
Refined (proposed) K=4
d
Partition accuracy after selection
0.05
0.74
ΔARI =+0.69
ARI (higher is better)
Plain stability argmax K=2
Refined (proposed) K=9