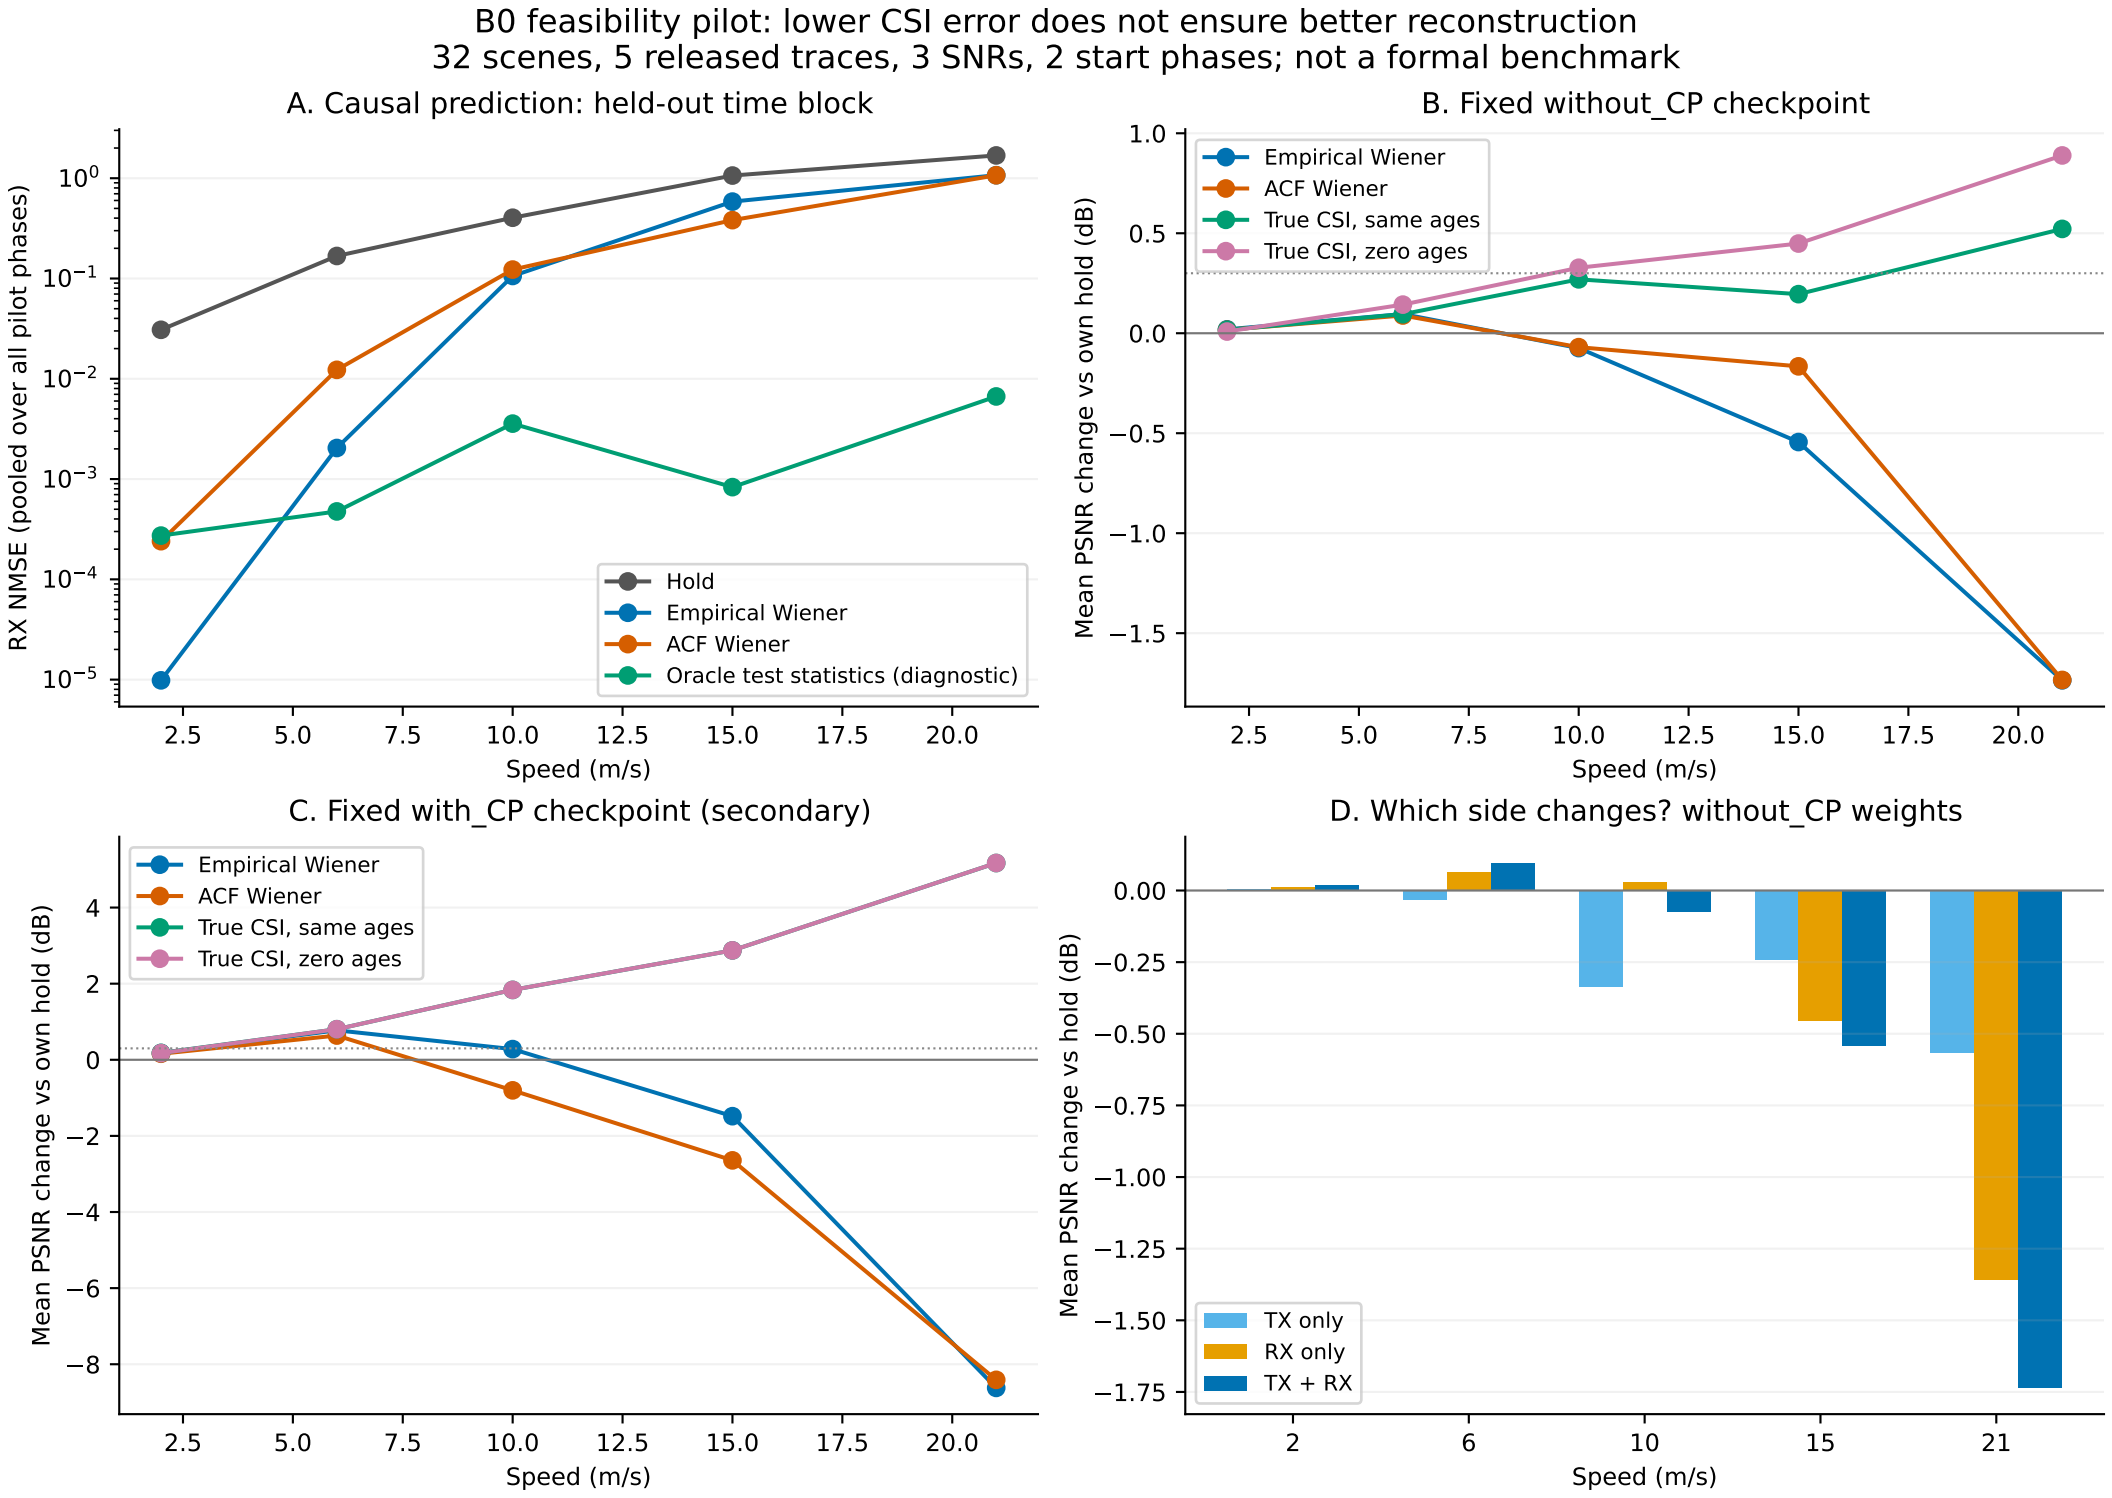
B0 feasibility pilot: lower CSI error does not ensure better reconstruction
32 scenes, 5 released traces, 3 SNRs, 2 start phases; not a formal benchmark
A. Causal prediction: held-out time block
RX NMSE (pooled over all pilot phases)
Speed (m/s)
Hold
Empirical Wiener
ACF Wiener
Oracle test statistics (diagnostic)
B. Fixed without_CP checkpoint
Mean PSNR change vs own hold (dB)
Empirical Wiener
ACF Wiener
True CSI, same ages
True CSI, zero ages
Speed (m/s)
C. Fixed with_CP checkpoint (secondary)
Mean PSNR change vs own hold (dB)
Empirical Wiener
ACF Wiener
True CSI, same ages
True CSI, zero ages
Speed (m/s)
D. Which side changes? without_CP weights
Mean PSNR change vs hold (dB)
TX only
RX only
TX + RX
Speed (m/s)