(a) All tuples in chunk are serialized into hash table entries

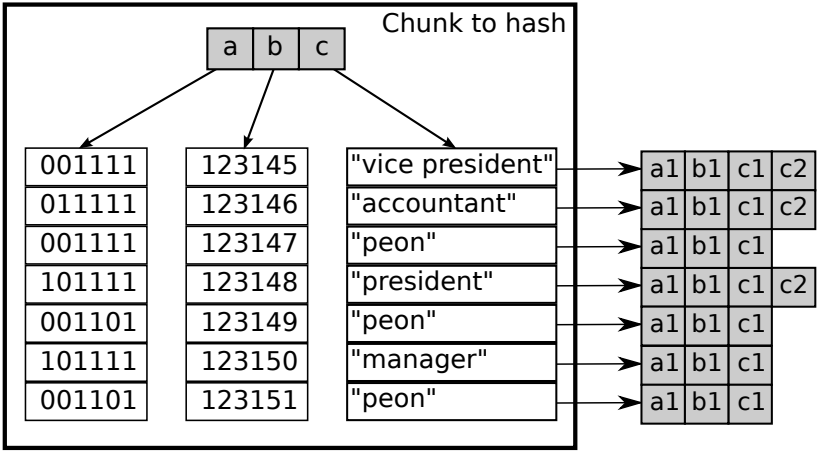

(b) Those entries are organized into *n_seg* lists

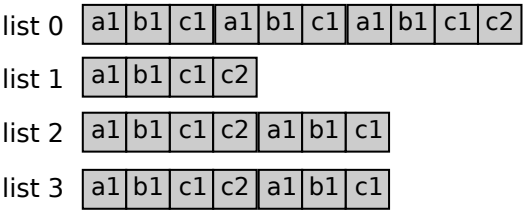
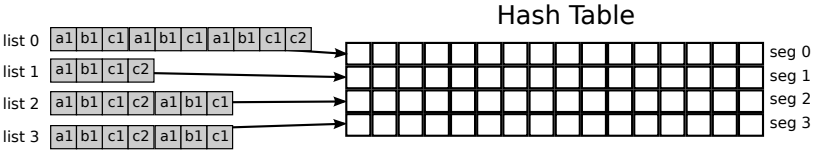
(b) Those lists are added to the hash table segments